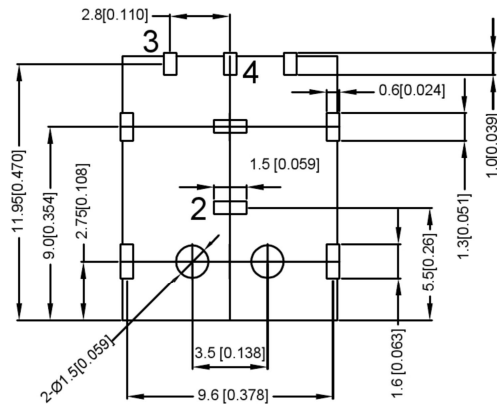
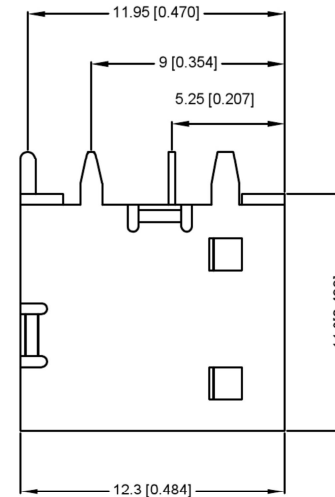
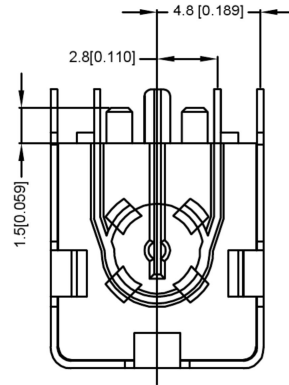
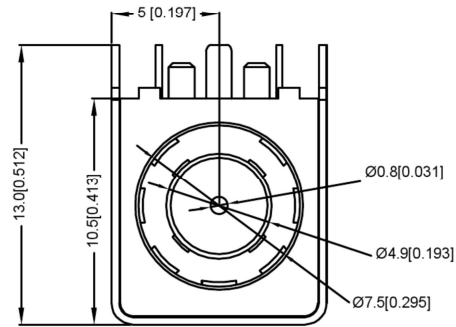


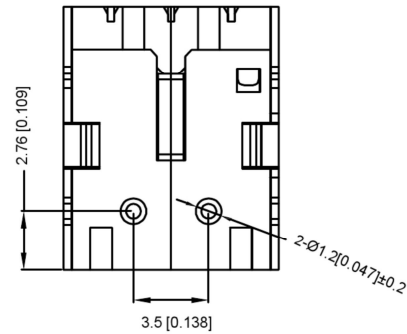


NOTES

注释

- CONTACT CURRENT RATING: 10 A
触点额定电流: 10 A
- CONTACT RESISTANCE: 50 mΩ MAX.
接触电阻: 最大 50 mΩ
- INSULATION RESISTANCE: 100 MΩ MIN.
绝缘电阻: 最小 100 MΩ
- DIELECTRIC WITHSTANDING: 36V AC MIN.
耐介质电压: 36V AC MIN.
- DURABILITY: 5,000 CYCLES MIN.;
耐久性: 最小 5000 次循环;
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.
最大连接器配合力为 29.4N (3.00Kgf)。
- CONNECTOR UNMATING FORCES: 2.94N (0.30Kgf) MIN.
连接器最小不匹配力为 2.94N (0.30Kgf)。

	MATERIAL	PLATING
axis support	Brass	silver
plastic	Pbt	
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	DC POWER JACK
CHKD		UNIT: mm/in	PART NO.: DC-042E
APPD		SIZE: A4	DWG NO.:
			WEIGHT
			SHEET
			REVISION
			1/1
			A0