

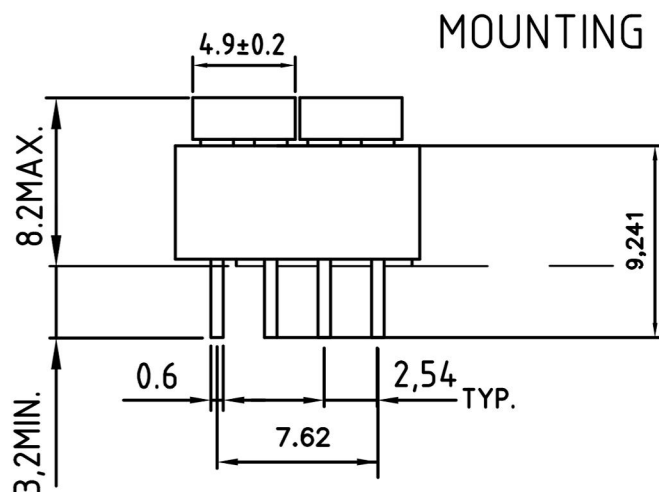



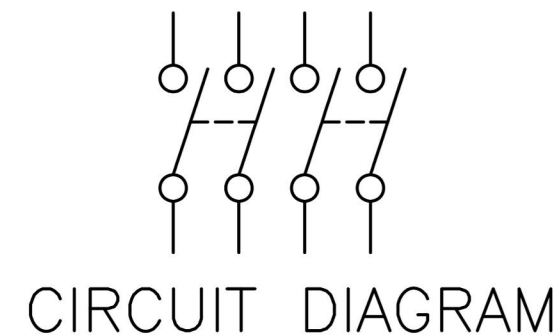


MOUNTING SURFACE

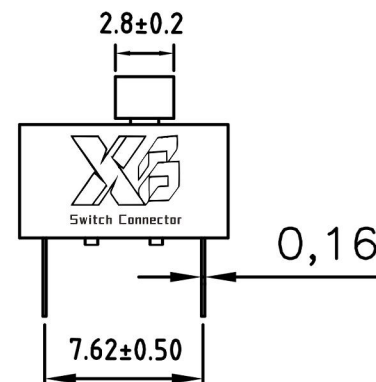

P.C.B. LAYOUT

ON POSMON

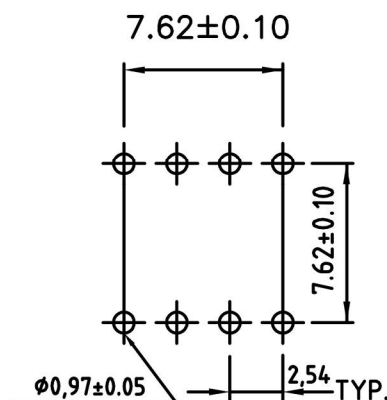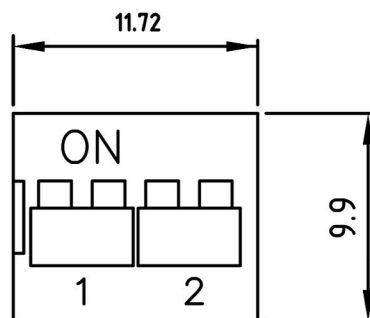

NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS.

2. GENERAL TOLERANCE:±0.2mm

3. MATERIAL: Δ BASE:UL94V-0 PBT Thermoplastic(Black)
Δ COVER:UL94V-0 PBT Thermoplastic(Red.Black.Blue)
Δ ACTUATORS:UL94V-0 PBT Thermoplastic(White)
Δ CONTACT PLATING:Gold plating over nickel
Δ PITTING MATERIAL:Epoxy

Δ ELECTRICAL

Electrical:2000 operations per switch-
24 VDC,25mA.

Non-Swithing Rating:100mA,50VDC.

Swithing Rating:25mA,24VDC.

Contact Resistance:50mΩ max. at initial.

Δ MECHANICAL

Mechanical life: 2000 operations per swith.

Stroke: 2.0mm.

Operation Temp: -25℃ to 70℃

Storage Temp: -40℃ to 85℃.

						 Switch Connector	DSND		SCALE: N/A	MODEL TYPE: DIP SWITCH		
							DWN		VIEW: 	PART NO.: DS-XX-X-X		
							CHKD		UNIT: mm/in	DWG NO.: XB-DS-04XBSL		
							APPD		SIZE: A4			