


CIRCUIT DIAGRAM

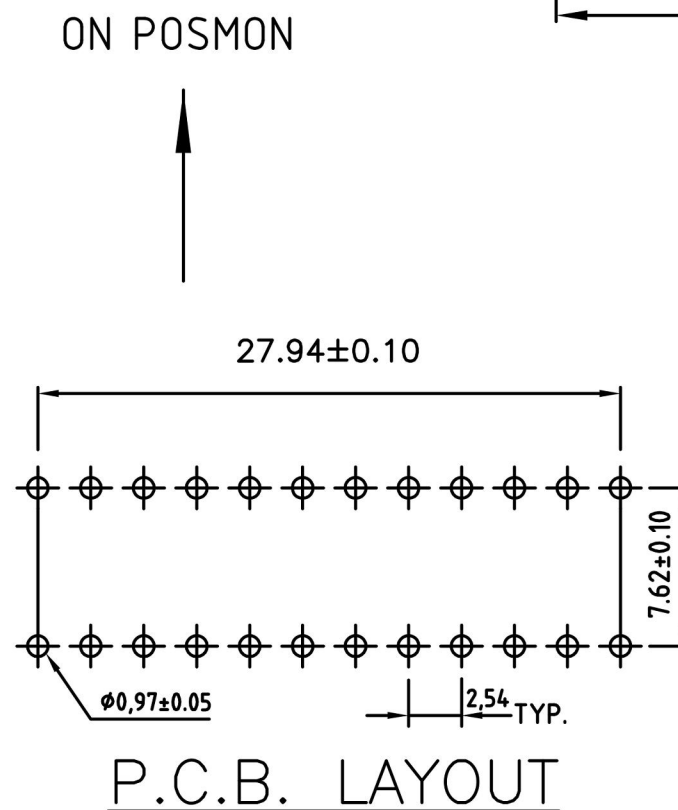

NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. GENERAL TOLERANCE:±0.2mm
3. MATERIAL: Δ BASE:UL94V-0 PBT Thermoplastic(Black)
Δ COVER:UL94V-0 PBT Thermoplastic(Red.Black.Blue)
Δ ACTUATORS:UL94V-0 PBT Thermoplastic(White)
Δ CONTACT PLATING:Gold plating over nickel
Δ PITTING MATERIAL:Epoxy

Δ ELECTRICAL

Electrical:2000 operations per switch-
24 VDC,25mA.
Non-Swithing Rating:100mA,50VDC.
Swithing Rating:25mA,24VDC.
Contact Resistance:50m Ω max. at initial.

Δ MECHANICAL

Mechanical life: 2000 operations per swith.
Stroke: 2.0mm.
Operation Temp: -25℃ to 70℃
Storage Temp: -40℃ to 85℃.

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
					UNSPECIFIED TOLERANCES
www.alpsr.com www.adxidz.com www.xbsswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: DIP SWITCH		
DWN		VIEW: 	PART NO.: DS-XX-X-X		
CHKD		UNIT: mm/in	DWG NO.: XB-DS-12XBSL		
APPD		SIZE: A4			
BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISI
				1/1	A0