
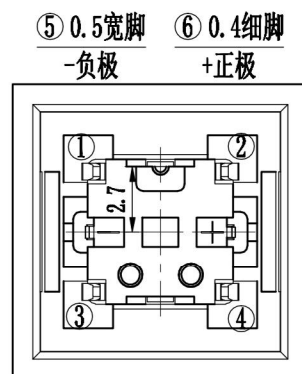
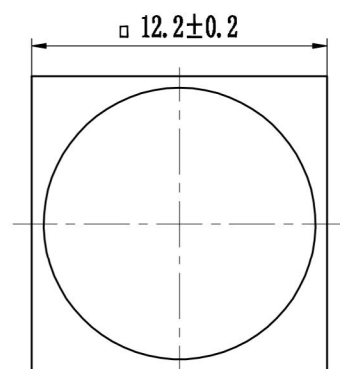

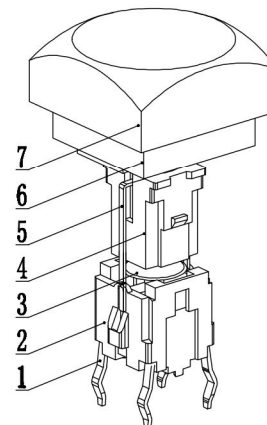
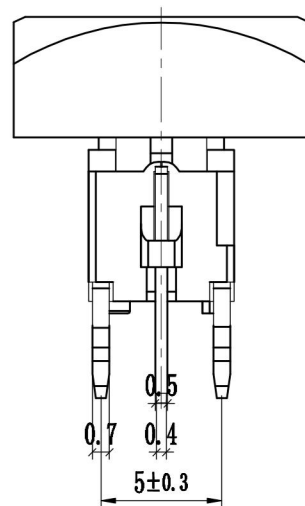
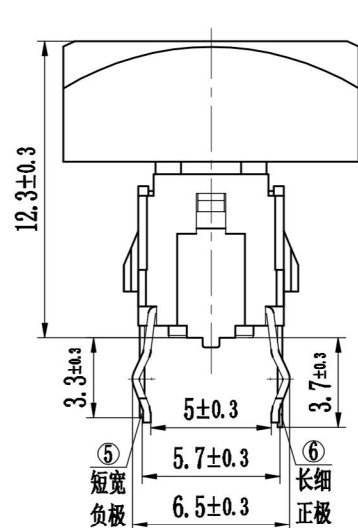


电原理图



灯光选型表

灯光	灯光代码
白光	W White
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	BL Blue
..	

带灯轻触主要技术指标: Illuminated Tact Switch Main Specifications:

气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	260gf±50gf	10W times	12±1 hours.
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	160gf±50gf	10W times	12±1 hours.

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
www.alpsr.com	www.gdxjdz.com	www.xbswitch.com			



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	LED SWITCH
CHKD		UNIT: mm/in	PART NO.: TM-002-M1-X
APPD		SIZE: A4	DWG NO.:
		WEIGHT	SHEET
			1/1
		REVISION	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD