

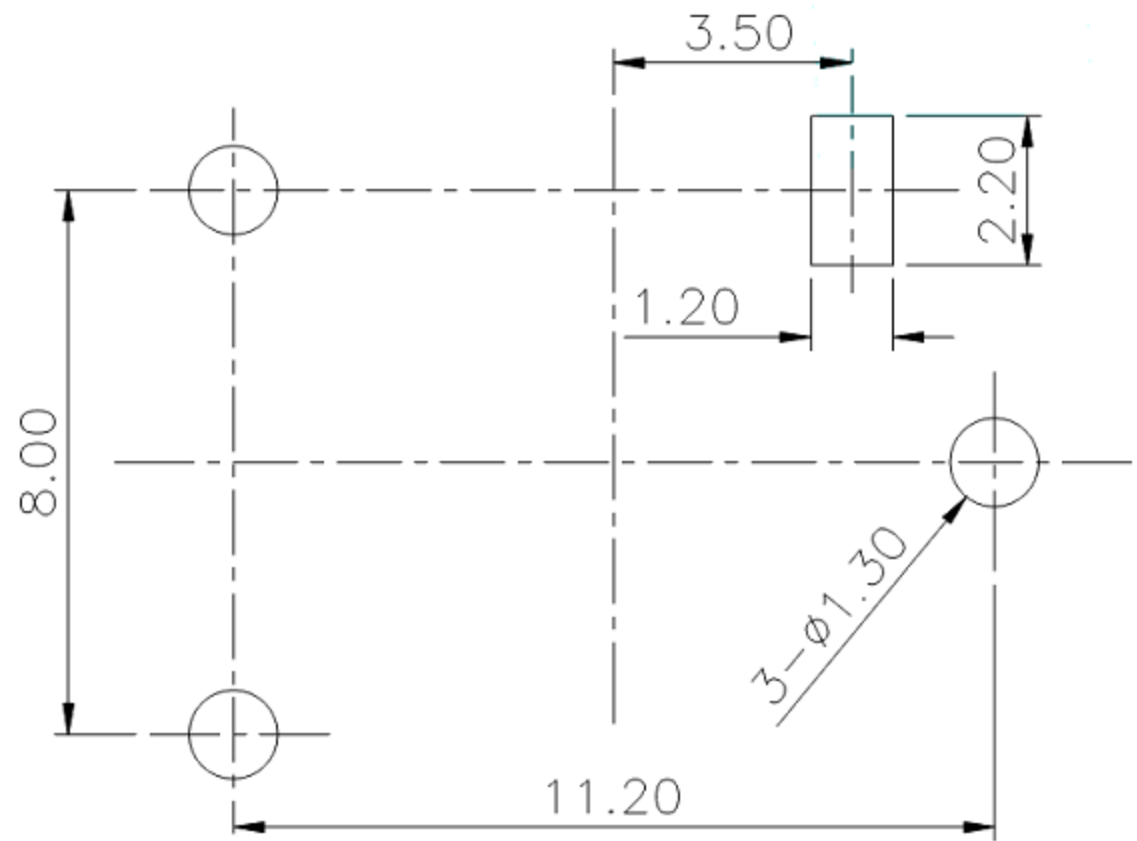
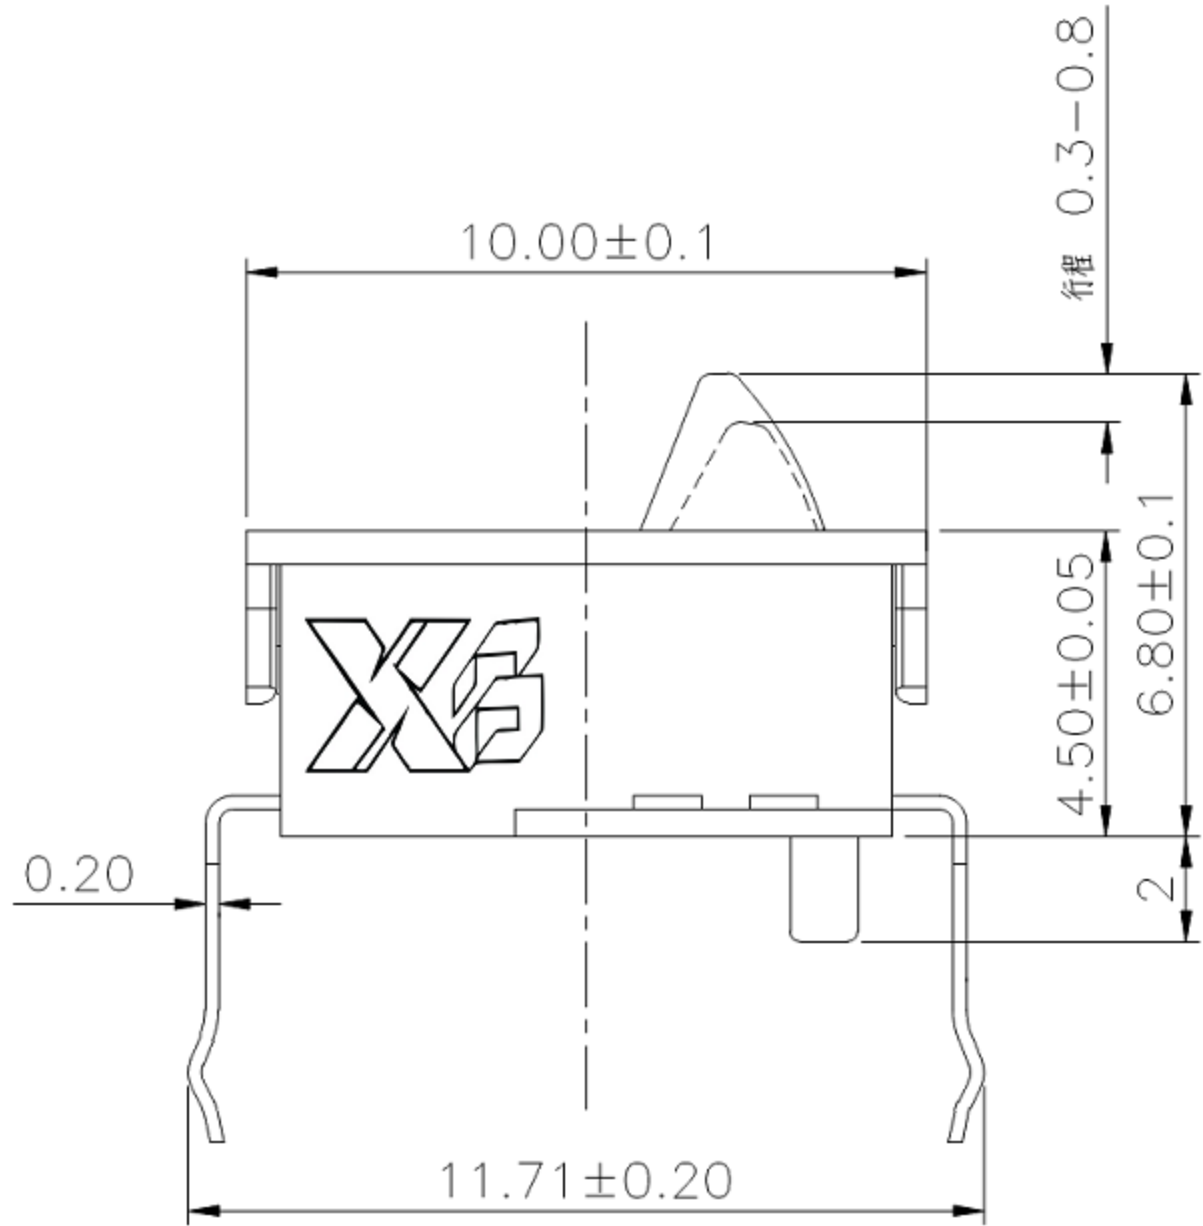
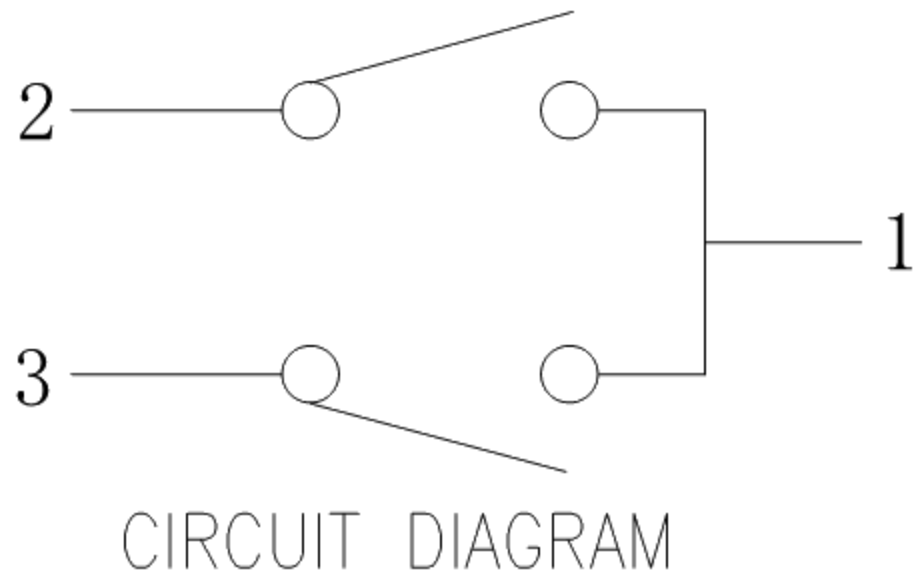
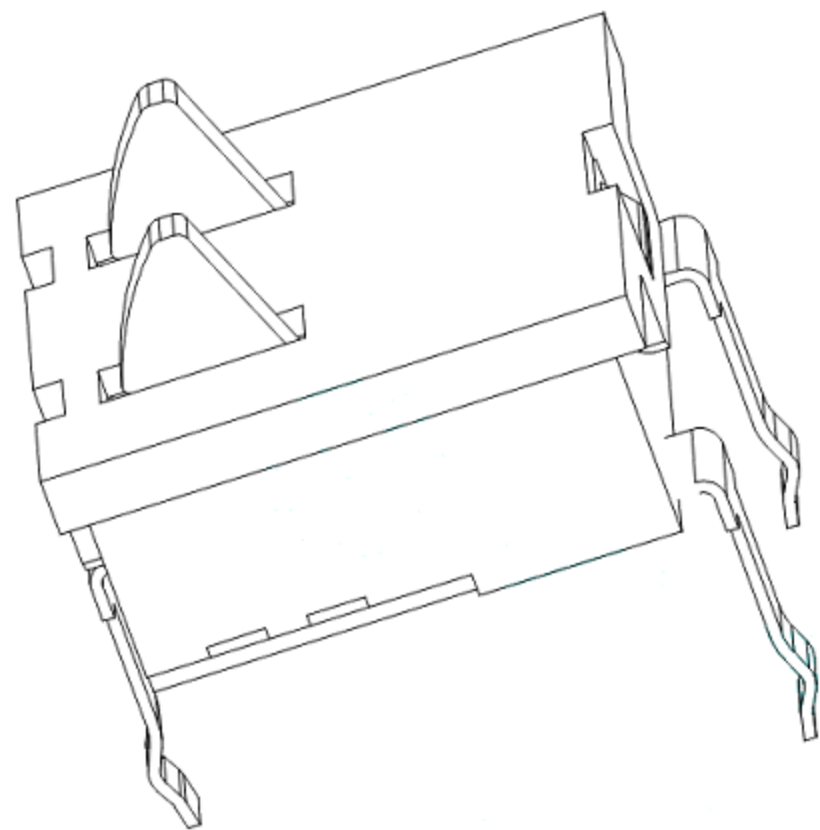
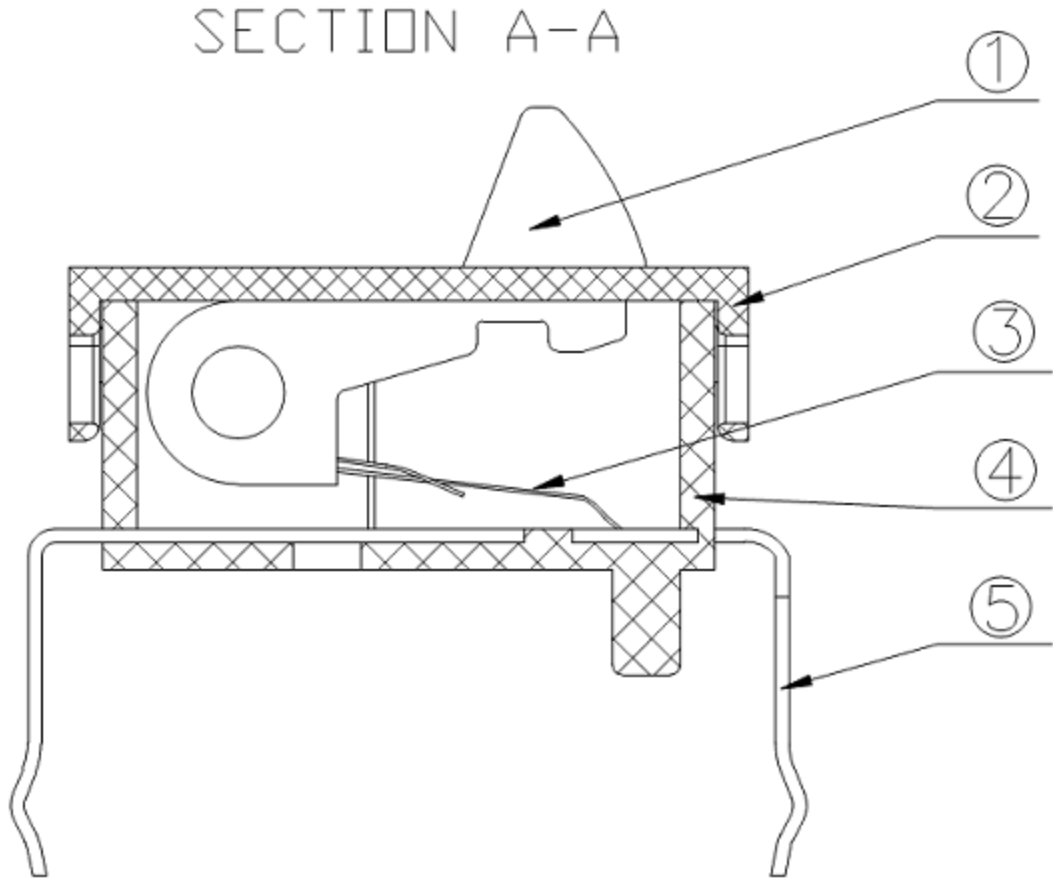
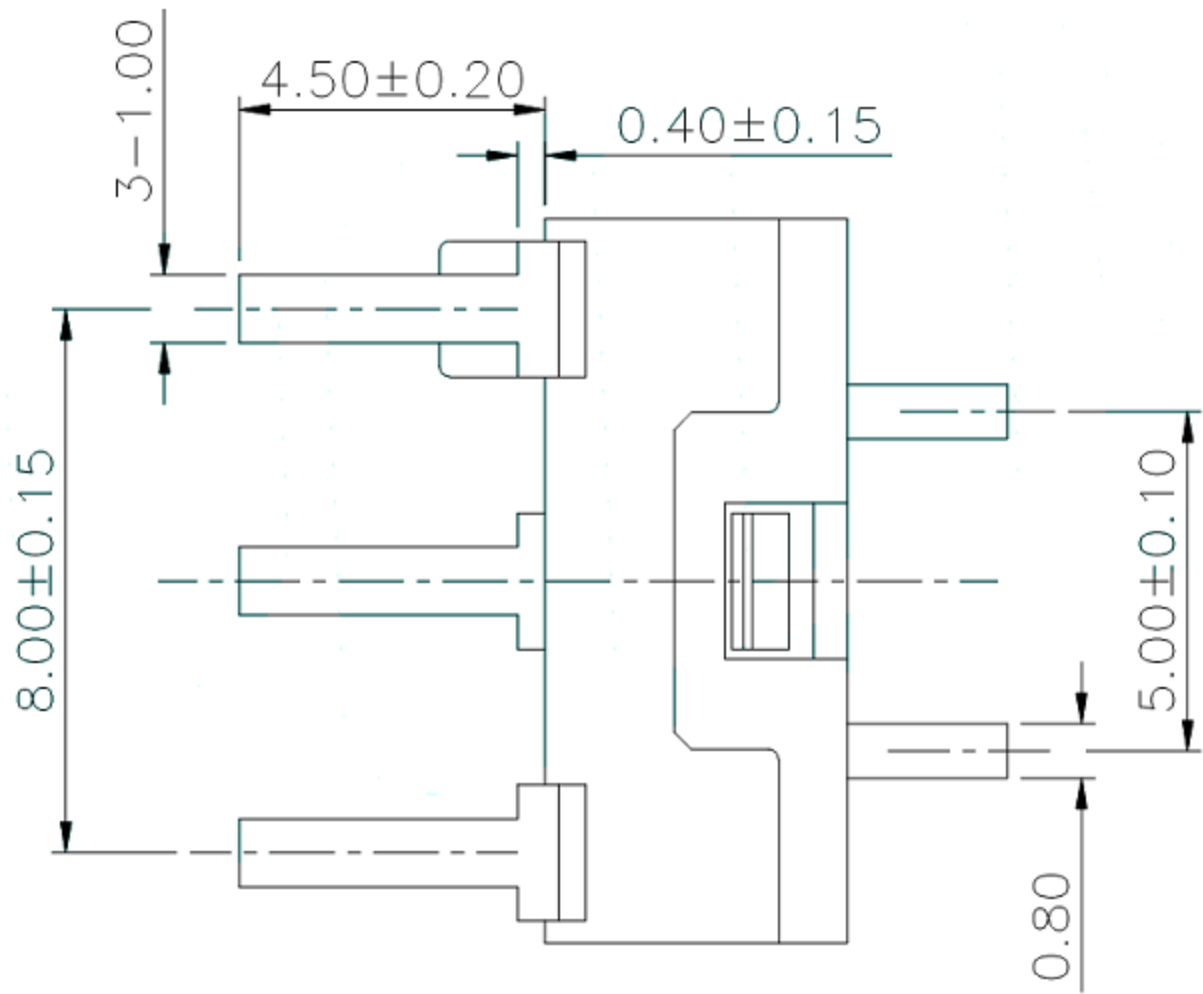


CAD FILE:

ROHS

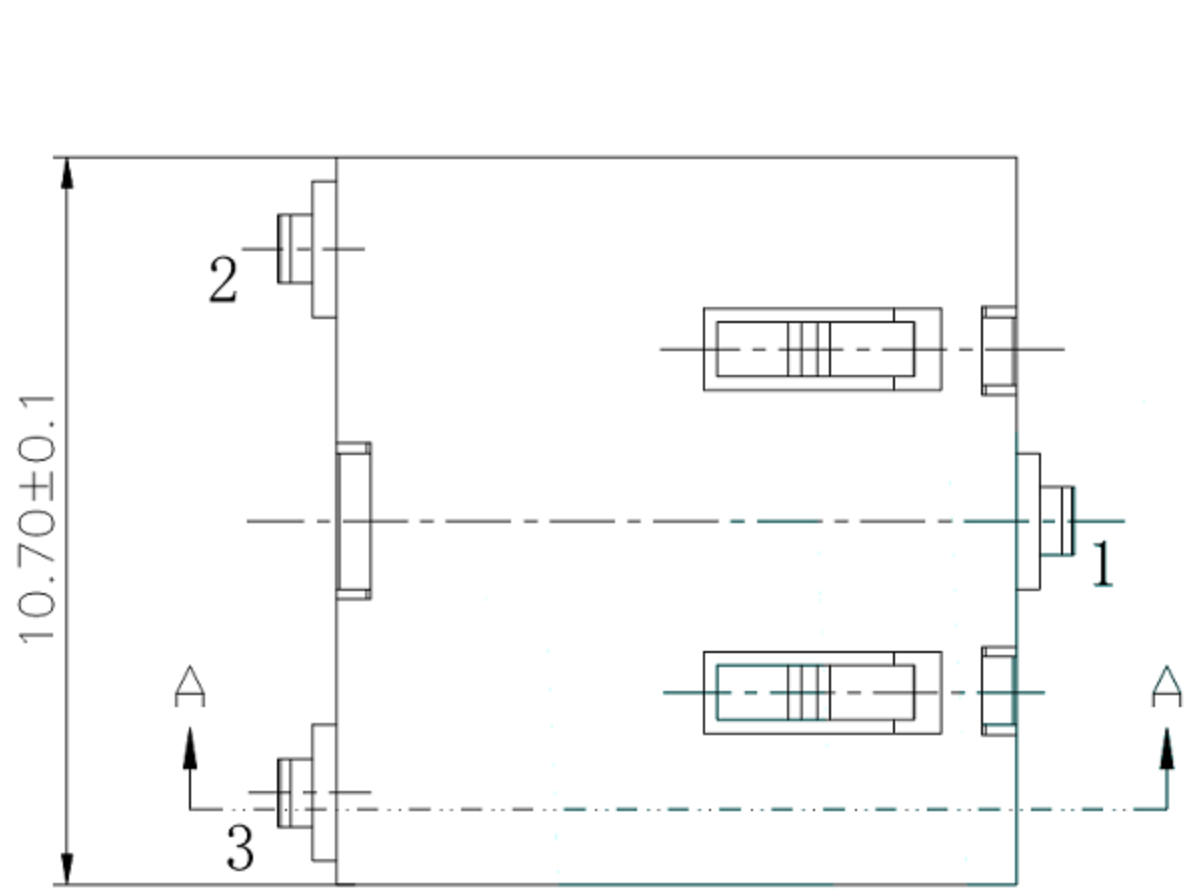

PCB LAND DIMENSION

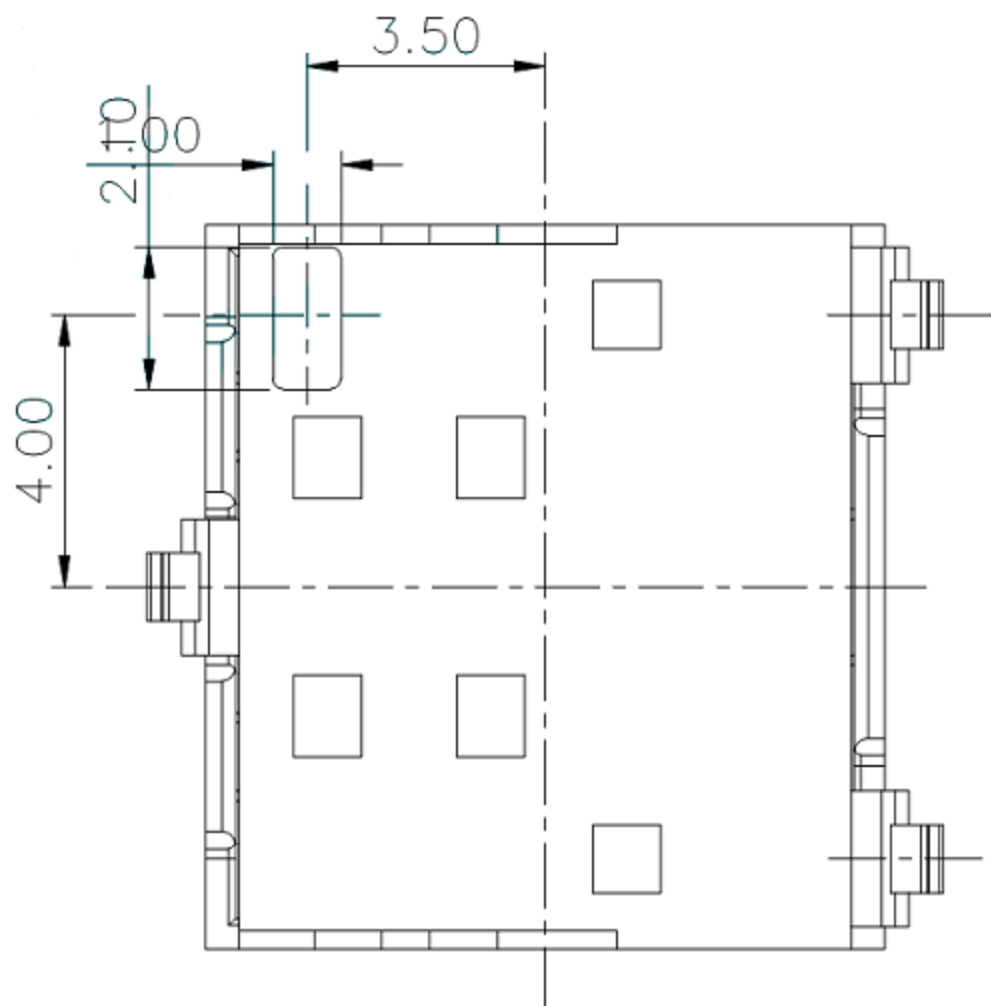

NOTE:
1.Rating: DC 16V 1A.
2.Dielectric withstanding : AC 250V for 1minute
3.Contact resistance : 100mΩ Max.
4.Insulation Resistance : 50mΩ Min.
5.Operating Force: 30gf±10gf.
6.Mechanical Life: 50000 CYCLES.

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detector Switch			UNIT : mm	DRWG NO.: XB-TM-VS-221
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TM-VS-221			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					