
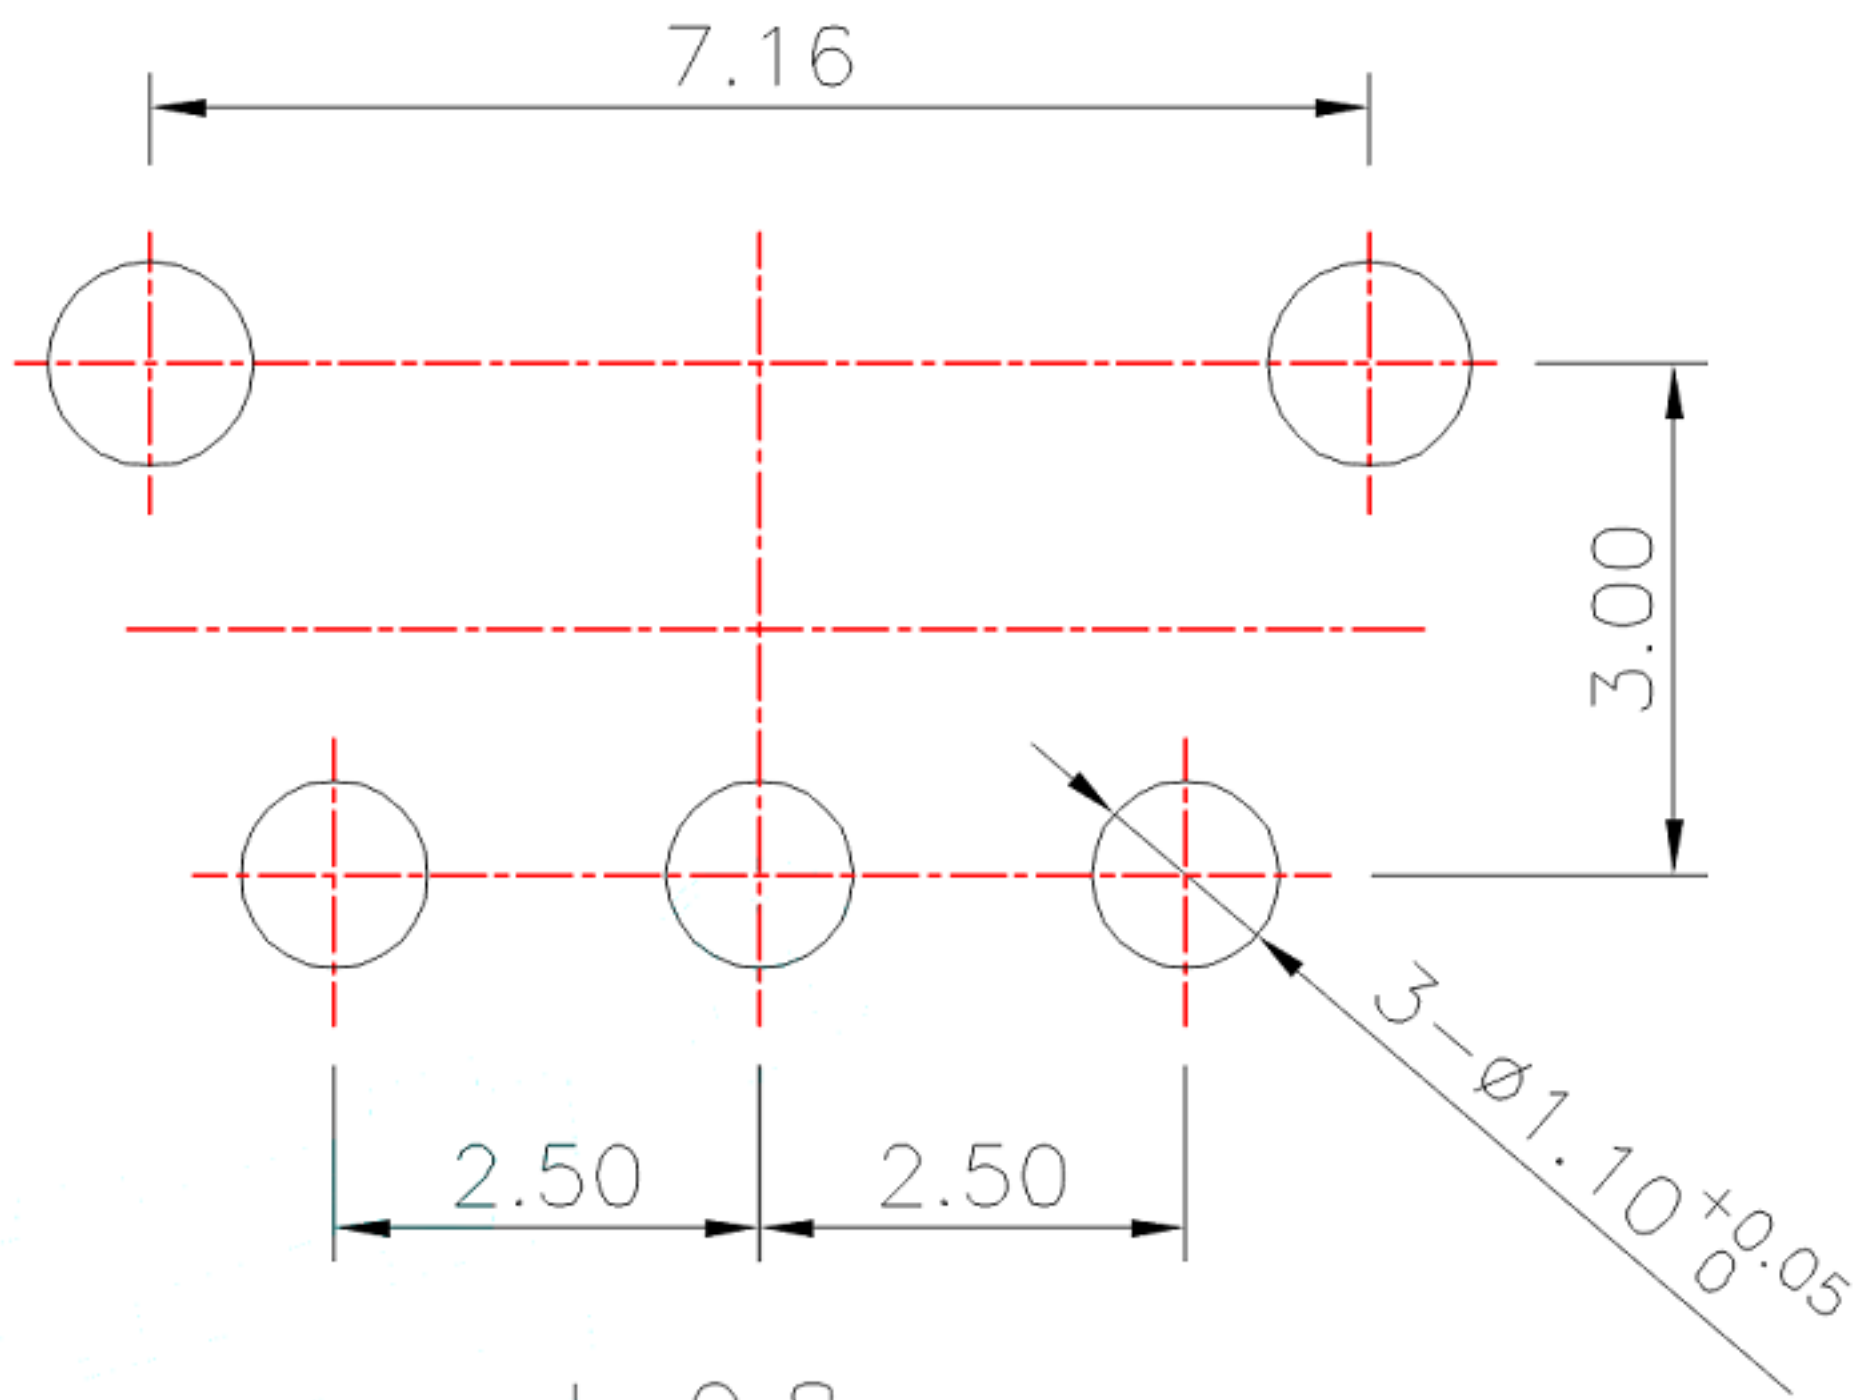
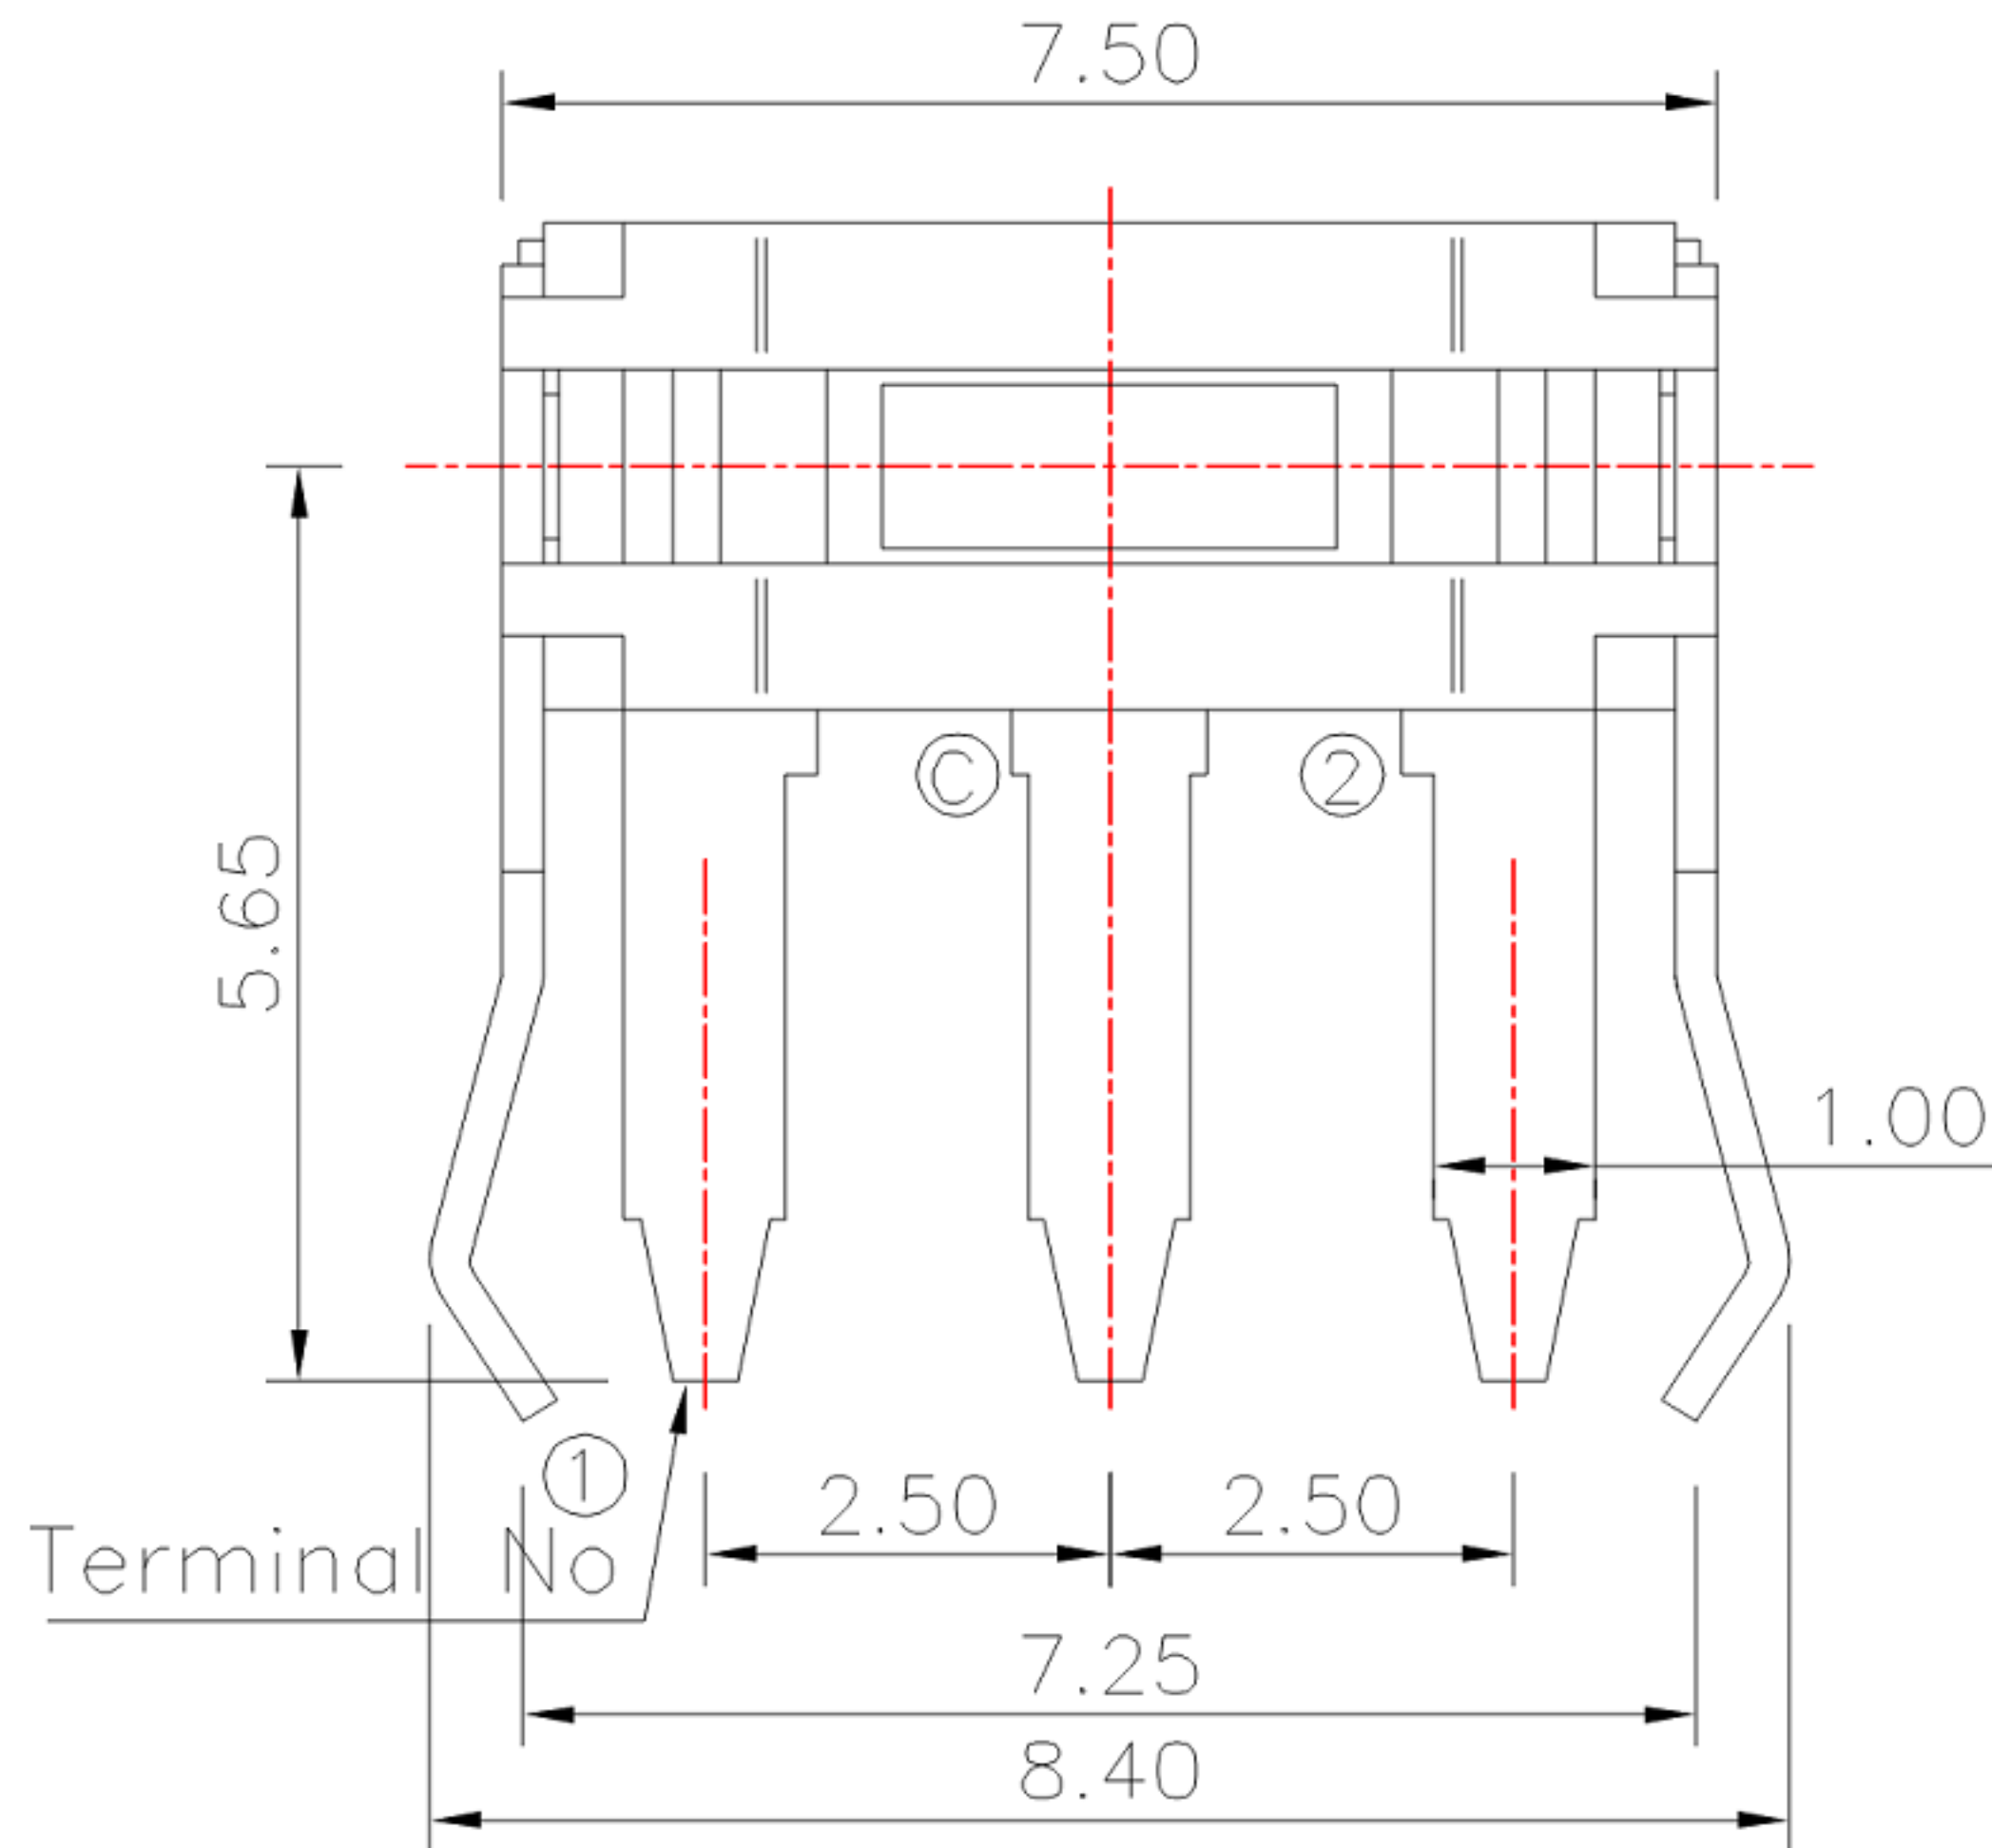
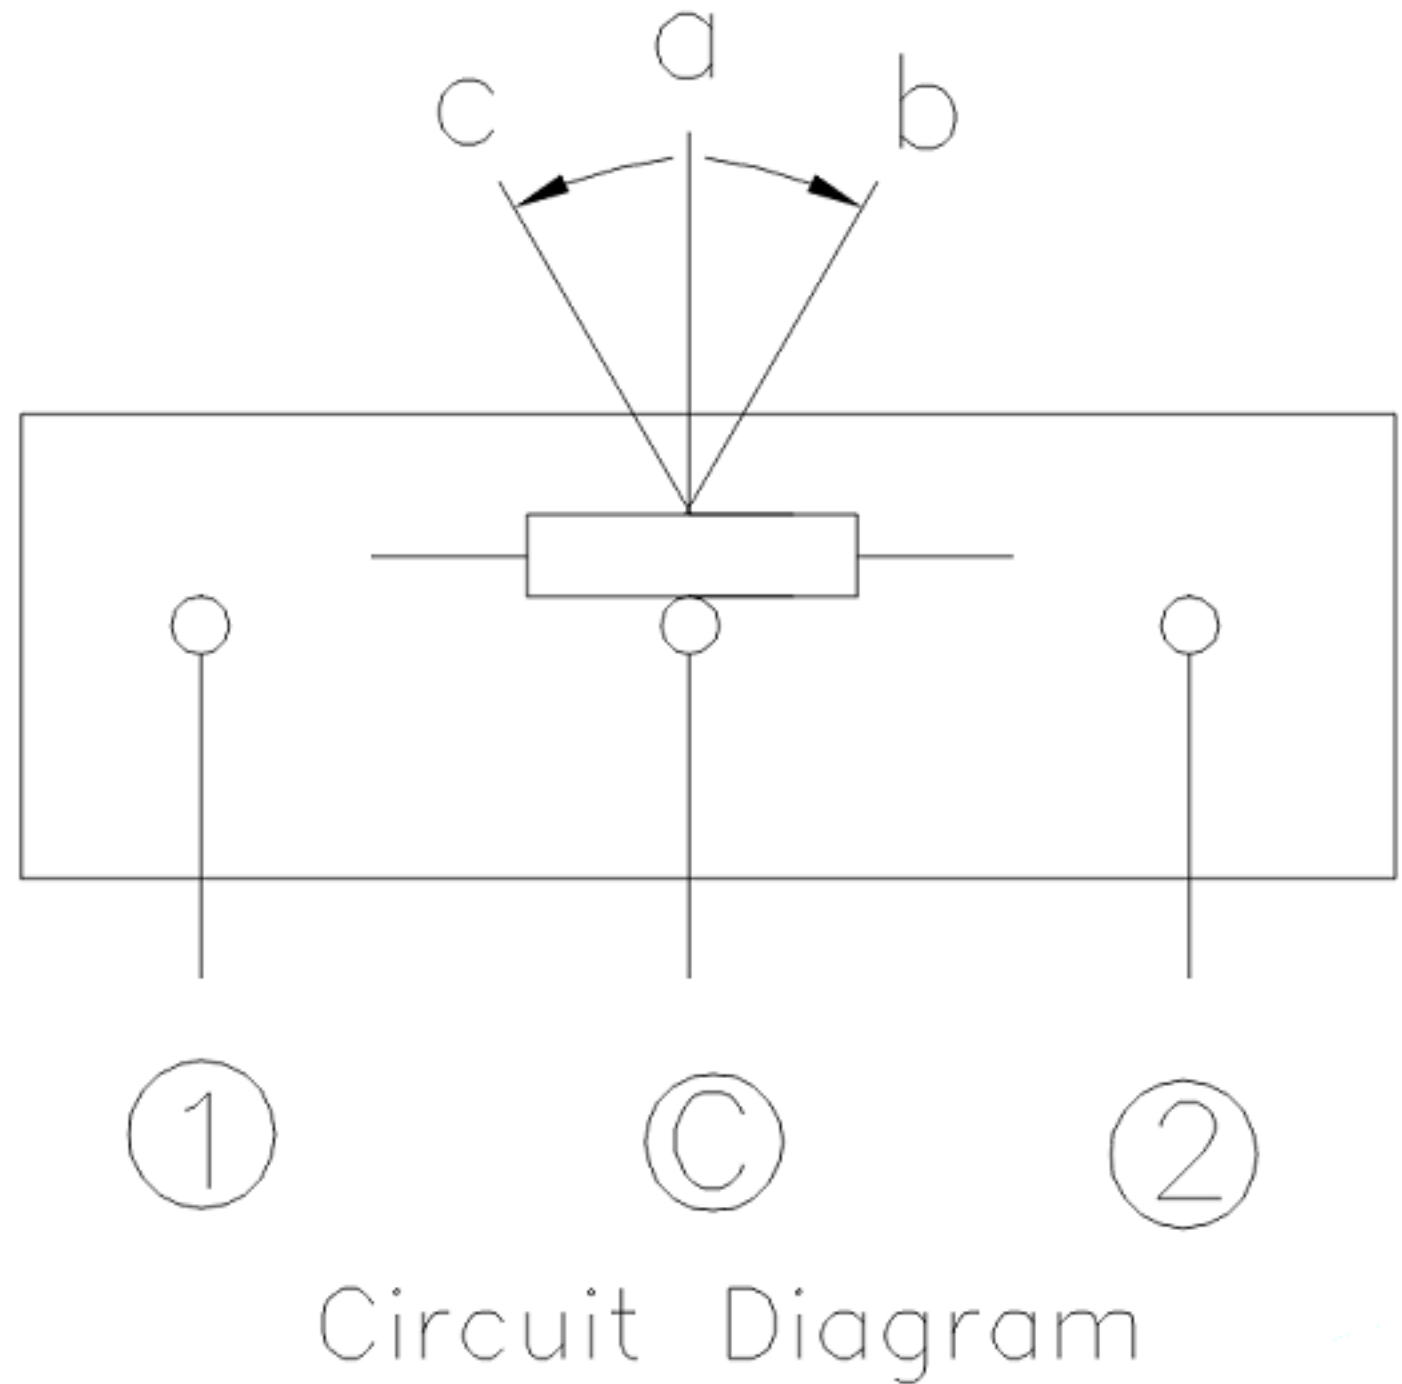
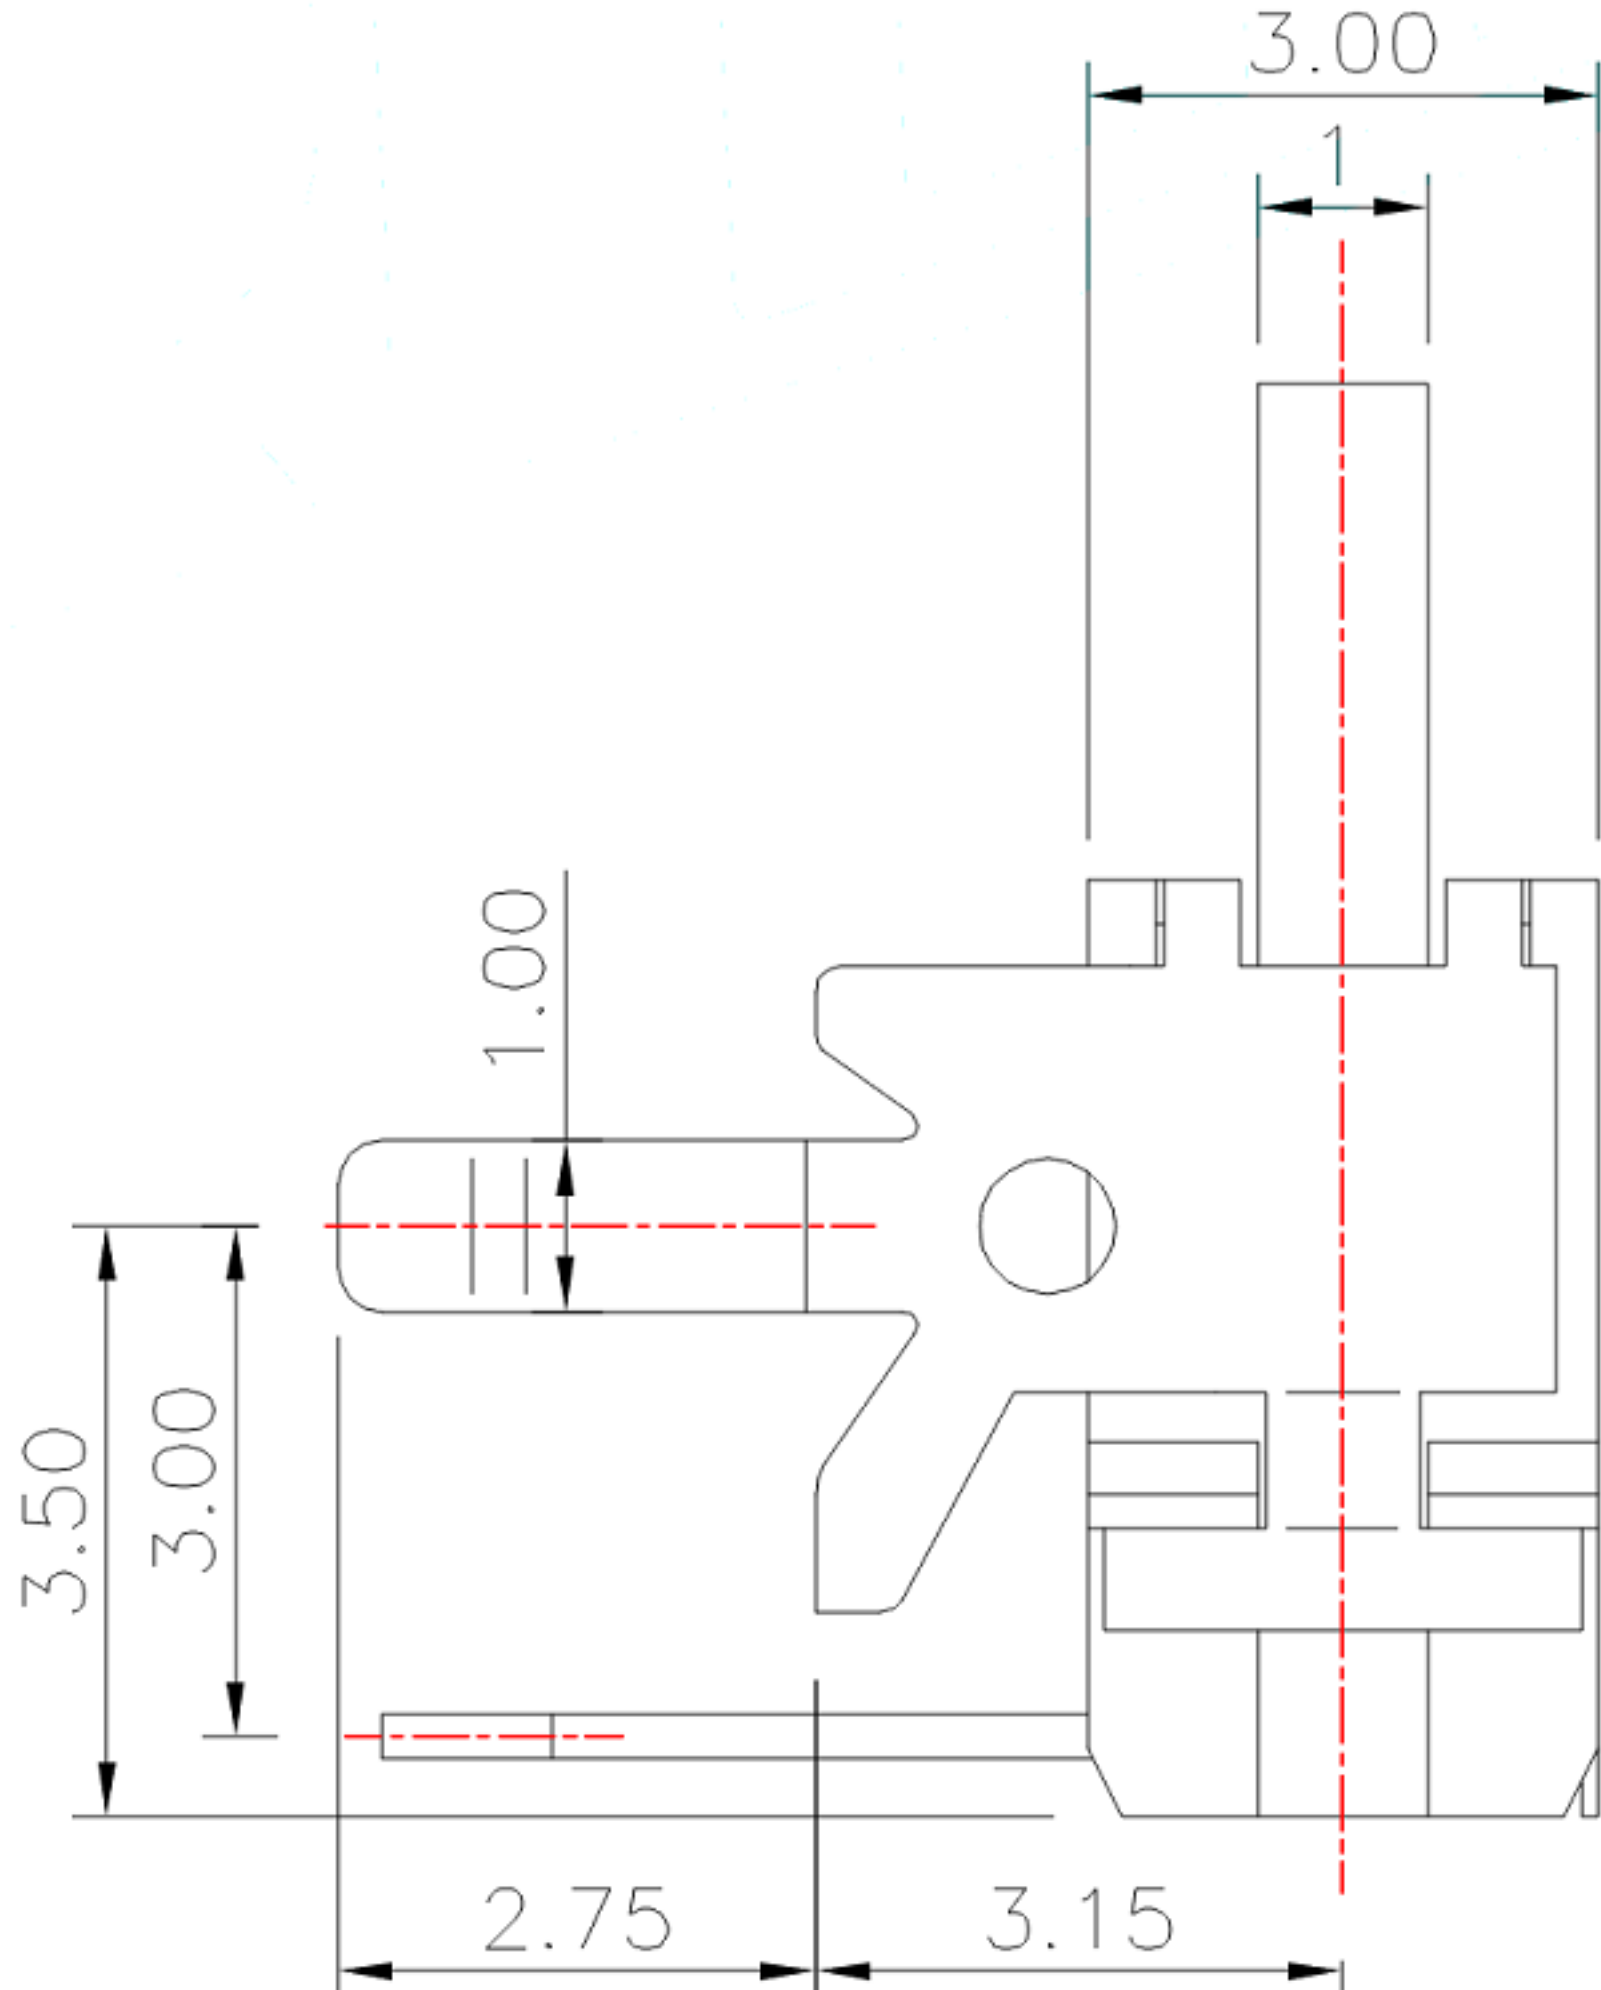


CAD FILE:

ROHS

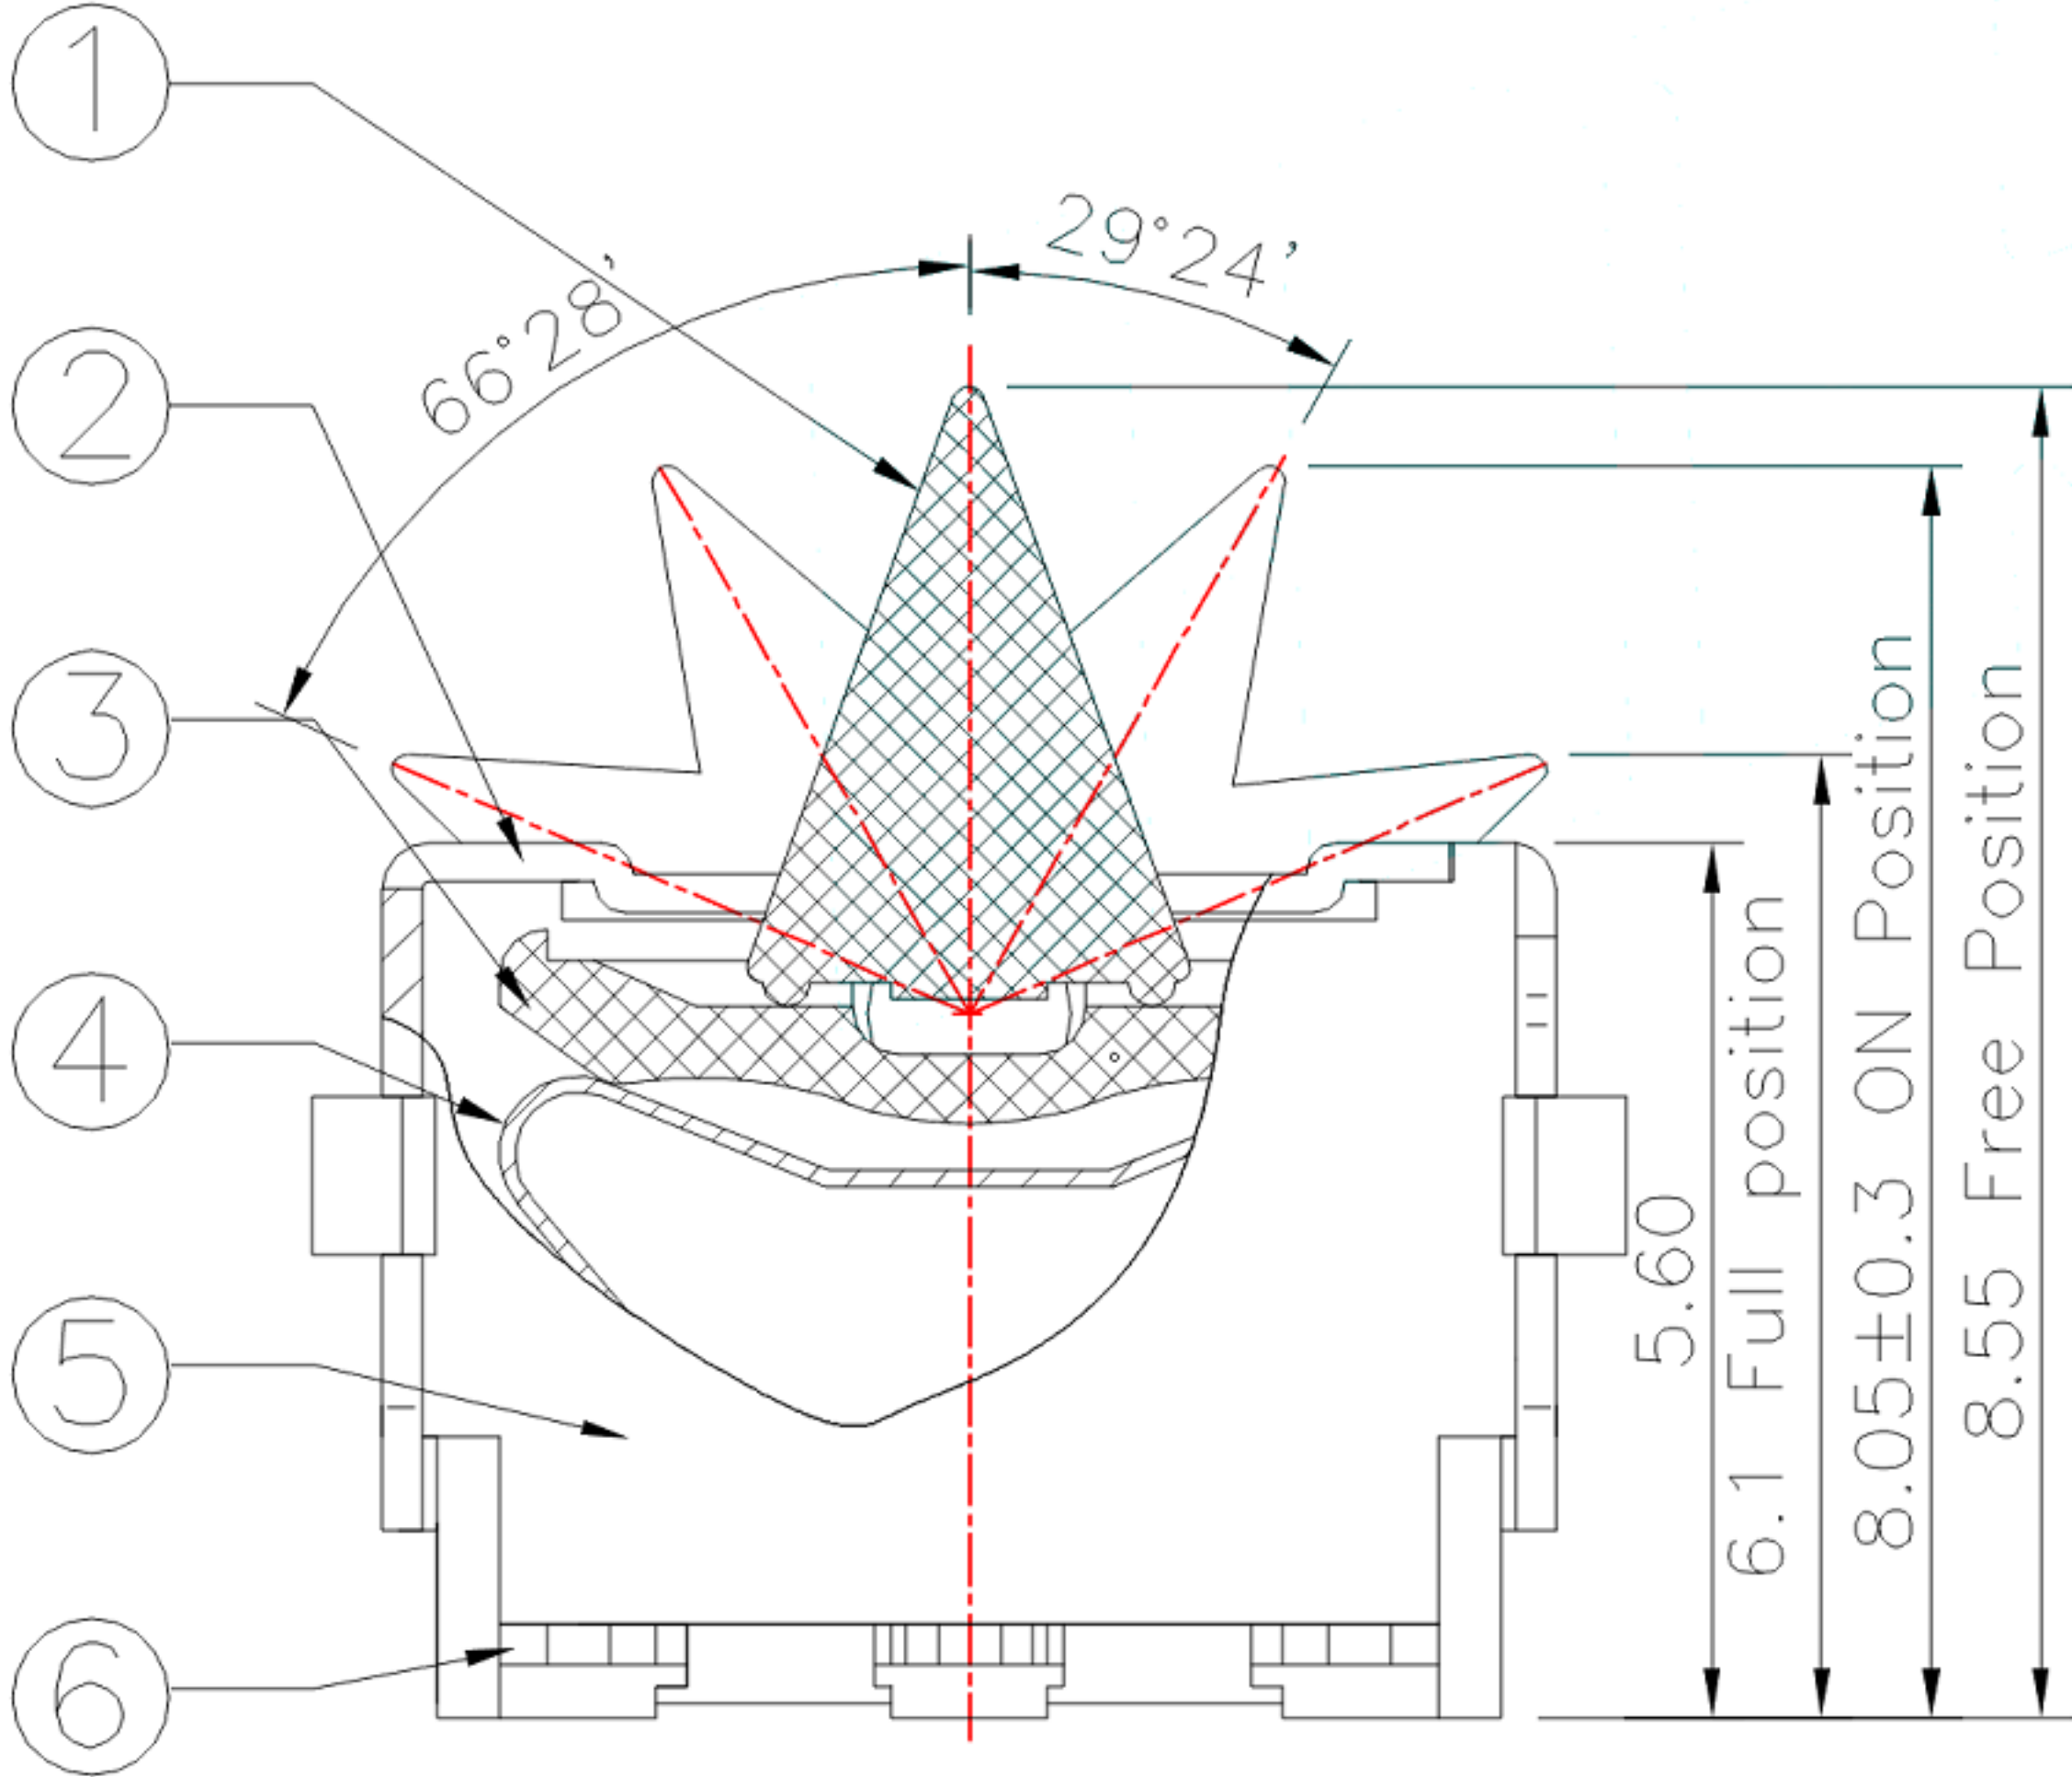

t=0.8mm

PCB Layout(Pattern side)

NOTE:
Rating: DC 5V 10mA
Operating Force: 30±10gf
Lifetime: 50,000 Cycles

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detector Switch			UNIT : mm	DRWG NO.: XB-TM-W-19W
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL: XB-TM-W-19W			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	XIB 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.				