







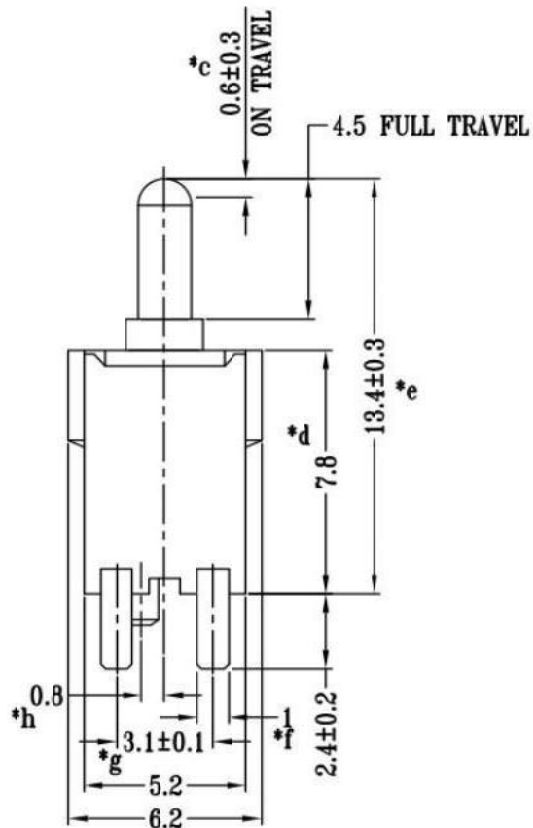


CAD FILE:

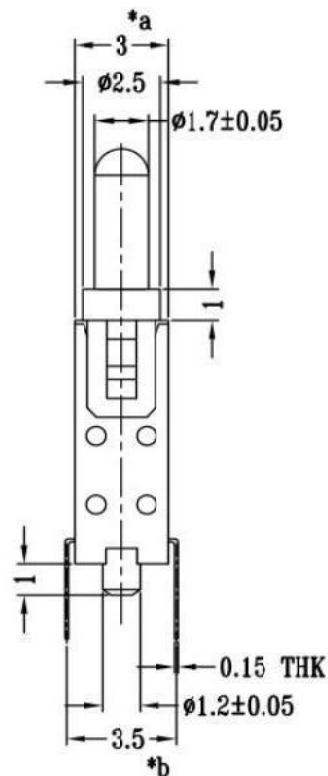

SCHEMATIC

1. 开关动作力: $120 \pm 30 \text{ gf}$
2. 返回力: 100 gf
3. 额定值: DC30V 0.1A
4. 接触电阻: $200 \text{ M}\Omega$ Max
5. 绝缘电阻: $\geq 100 \text{ M}\Omega$ (MinDC100V)
6. 耐压: 25CV AC (50HZ或60HZ)/1min
7. 机械寿命: 50000 Min

P.C.B LAYOUT
BOTTOM VIEW

3. 额定值: DC30V 0.1A

注“*”表示关键尺寸 (8个)

8					TOLERANCE				
7					UNLESS SPECIFIED				
6	TERMINAL	BRASS STRIP	1	Ag PLATED	WITHIN 1.5mm : $\pm 0.1 \text{ mm}$	A	2020-08-31	初版	李静
5	CASE	PA66	1	BLACK	OVER 1.5mm : $\pm 0.2 \text{ mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	SPRING	SUS	1	NATURAL	TITLE : PUSH SWITCH			UNIT : mm	DRWG NO.: KD-DR-DTS500YY-00
3	CONTACT	PBS STRIP	1	Ag CLAD	MODEL: XB-TM-05C			SCALE: 5:1	DWN. 高广球 2021-08-6
2	KNOB	PA66	1	YELLOW	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D 李凌锋	2021-08-6
1	COVER	PA66	1	BLACK				APPD. 李静	2021-08-6
NO.	PARTS	MATERIALS	QTY	FINISH					