



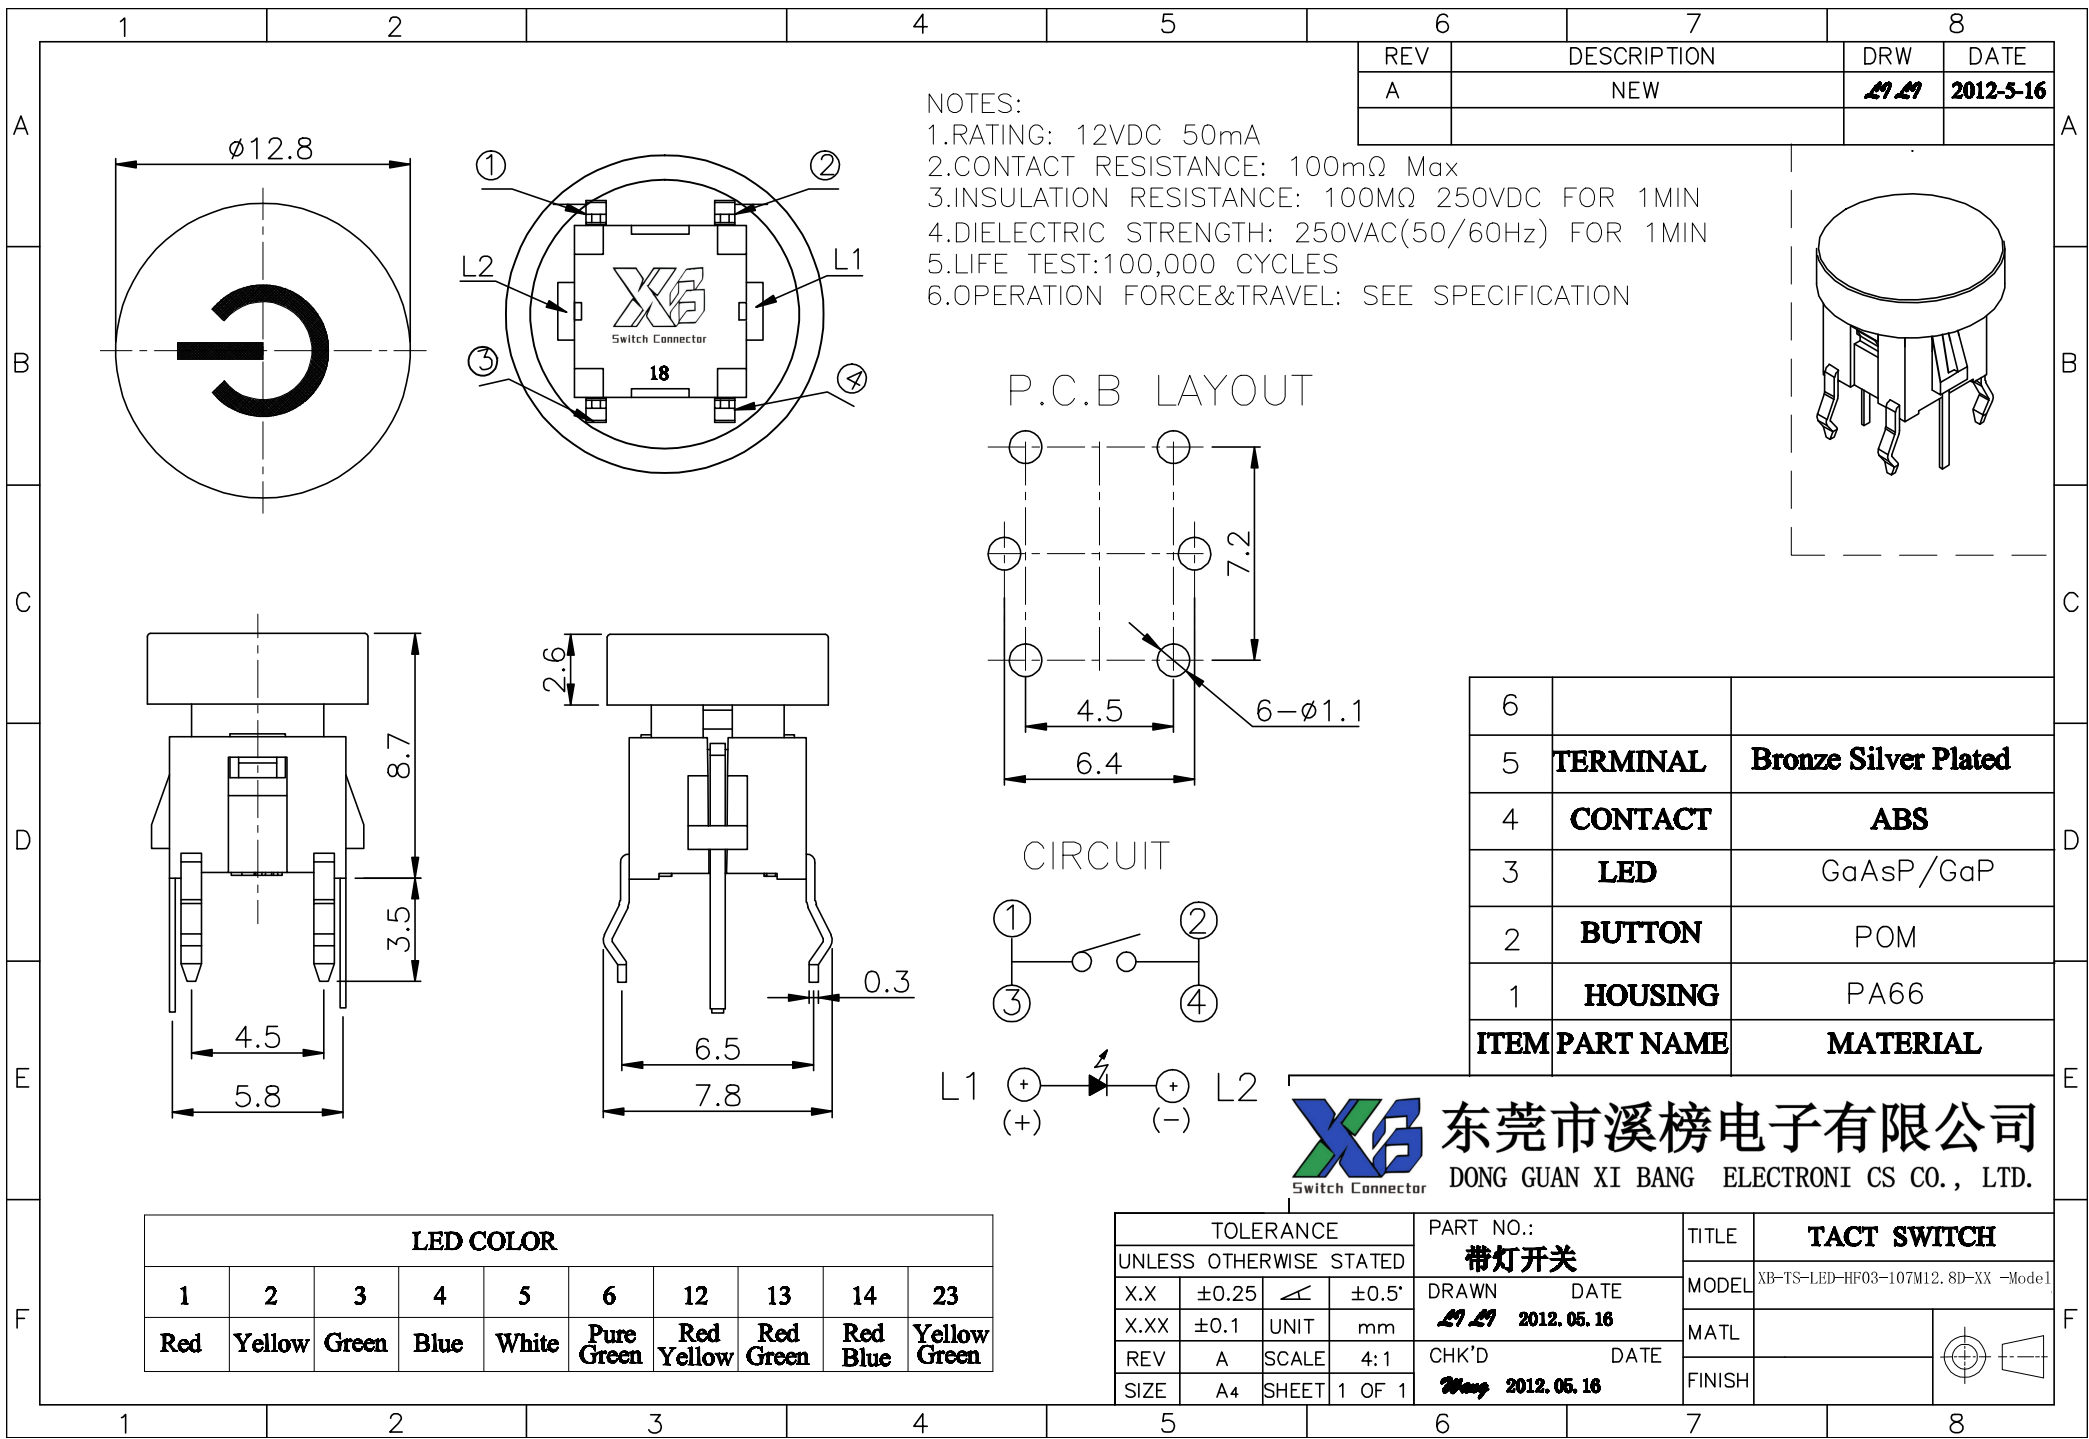


NOTES:
1.RATING: 12VDC 50mA
2.CONTACT RESISTANCE: 100mΩ Max
3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
5.LIFE TEST:100,000 CYCLES
6.OPERATION FORCE&TRAVEL: SEE SPECIFICATION

P.C.B LAYOUT

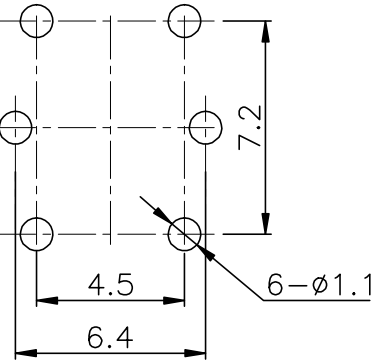

CIRCUIT



6		
5	TERMINAL	Bronze Silver Plated
4	CONTACT	ABS
3	LED	GaAsP/GaP
2	BUTTON	POM
1	HOUSING	PA66
ITEM	PART NAME	MATERIAL

LED COLOR									
1	2	3	4	5	6	12	13	14	23
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	Yellow Green

TOLERANCE UNLESS OTHERWISE STATED				PART NO.: 带灯开关	TITLE TACT SWITCH
X.X	±0.25	∠	±0.5'	DRAWN DATE 2012.05.16	MODEL XB-TS-LED-HF03-107M12.8D-XX -Model
X.XX	±0.1	UNIT	mm	CHK'D DATE 2012.05.16	MATL
REV	A	SCALE	4:1		FINISH
SIZE	A4	SHEET	1 OF 1		

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.