

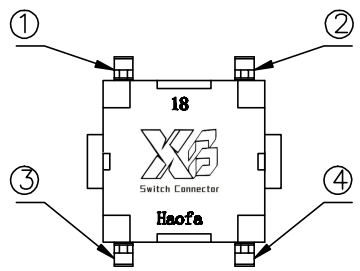



REV	DESCRIPTION	DRW	DATE
A	NEW	2012.05.16	2012-1-16

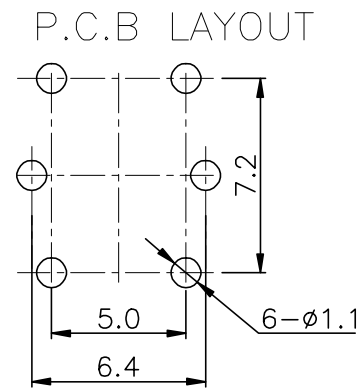

CIRCUIT



- NOTES:
- 1.RATING: 12VDC 50mA
 - 2.CONTACT RESISTANCE: 100mΩ Max
 - 3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
 - 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
 - 5.LIFE TEST:100,000 CYCLES
 - 6.OPERATION FORCE&TRAVEL: SEE SPECIFICATION

6		
5	TERMINAL	Bronze Silver Plated
4	CONTACT	
3	LED	GaAsP/GaP
2	BUTTON	PC
1	HOUSING	PA66
	ITEM PART NAME	MATERIAL

XIB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

LED COLOR									
1	2	3	4	5	6	12	13	14	23
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	Yellow Green

TOLERANCE				PART NO.:		TITLE	
UNLESS OTHERWISE STATED				带灯开关		TACT SWITCH	
X.X	±0.25	∠	±0.5'	DRAWN	DATE	MODEL	XB-TS-LED-HF03-1MT-XX1
X.XX	±0.1	UNIT	mm	2012.05.16	2012.05.16	MATL	
REV	A	SCALE	4:1	CHK'D	DATE	FINISH	
SIZE	A4	SHEET	1 OF 1	2012.05.16			

