

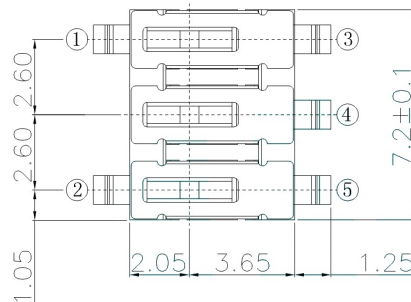





CAD FILE:

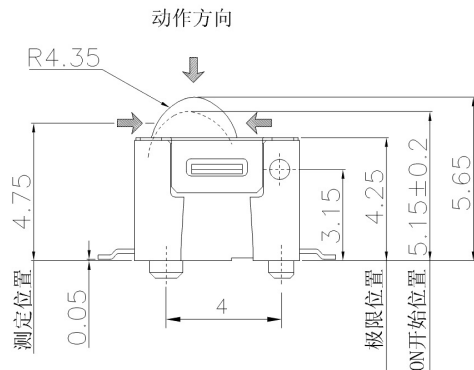

SCHEMATIC

技术要求:

1. 额定负荷: DC 5V 0.1~1mA
2. 绝缘电阻: $\geq 100\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度: $-10^{\circ} \sim +60^{\circ}$
6. 相对湿度: $40^{\circ}\text{C} \leq 95\%$
7. 接触电阻: $\leq 100\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: $\leq 0.3\text{N}$ (31gf)
10. 各零件无明显飞边, 配合要紧密, 不得有明显松动。
11. 未注公差尺寸均按GB1804-m级精度要求。

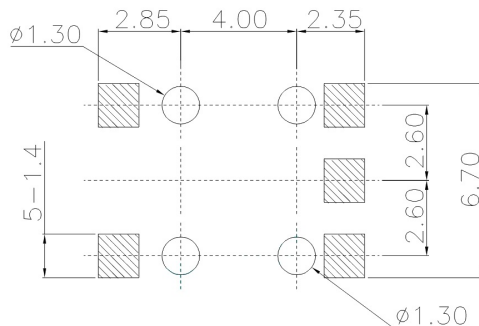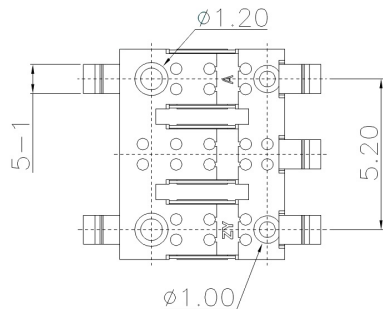

PCB LAND DIMENSION

注: "*" 表示关键尺寸(4个).

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detector Switches			UNIT : mm	DRWG NO.:
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.				