

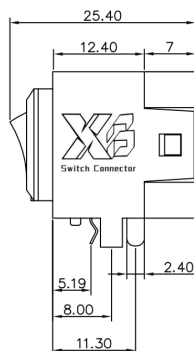
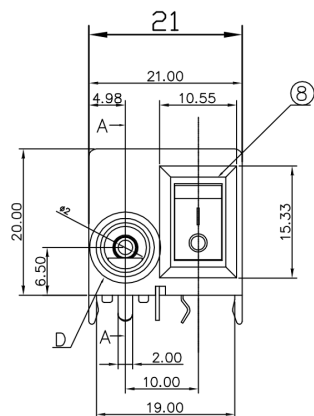




CAD FILE:





SEC A-A

D
SC:2:1

SCHEMATIC



RECOMMENDED PLUG

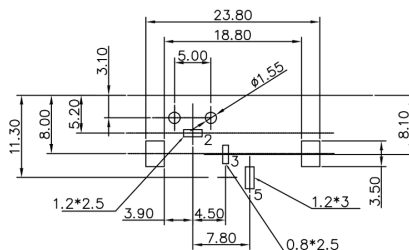

PCB HOLES(THE PATTERN SIDS) t=1.2/1.6mm

NOTE:GENERAL TOLERANCE:±0.1mm

ELECTRICAL
RATING:DC JACK 20VDC 5A ;
SWITCH:125/250VAC 3A
CONTACT RESISTANCE: 30mΩ MAX
INSULATION RESISTANCE: 100 MΩ MIN.
DIELECTRIC WITHSTAND VOLTAGE: 500V AC
INSERTION FORCE:3-35N.
DURABILITY TEST: 5,000 CYCLES.
TEMPERATURE RANGE: -25°C TO +85°C
PACKAGING: TAPE&REEL
MATERIALS & PLATING: SEE THE TABLE BELOW.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC power socket			UNIT : mm	DRWG NO.:
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODIFI :			SCALE: 5:1	DWN. JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN
NO.	PARTS	MATERIALS	Q'TY	FINISH	X3 东莞市溪榜电子有限公司			APPD.	2012-9-25
					DONG GUAN XI BANG ELECTRONICS CO., LTD.				