

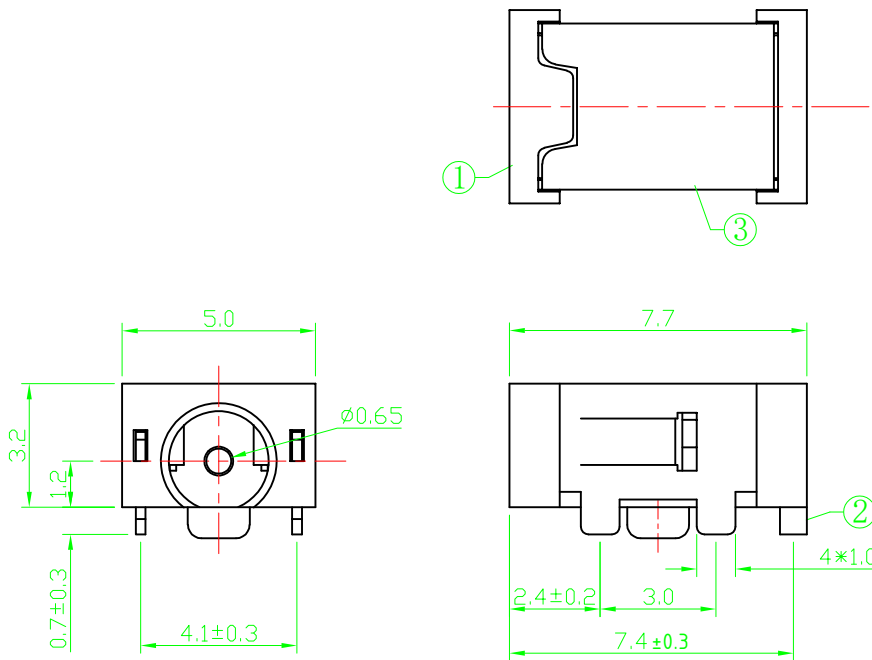
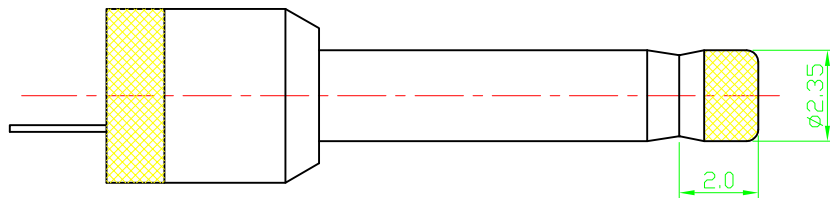





SCHEMATIC



RECOMMENDED PLUG

P.C.B LAYOUT TOP VIEW

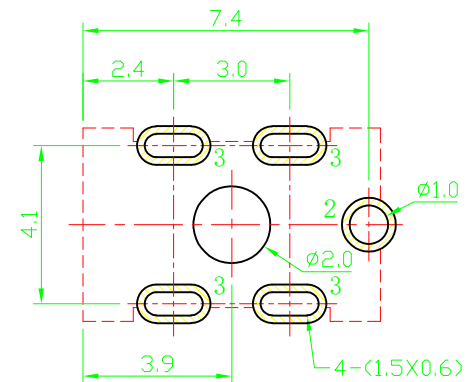

SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 2-20N;
6. life test: 5,000 cycles.


3	COAT	1	C5210	Ag-Plating
2	PIN	1	C2680	Ag-Plating
1	HOUSING	1	PA9T, BLACK	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES









XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ2.35 DC POWER JACK
DIM	TOL	DIM	TOL		2021.8.14	
x.	±0.50	x.	±2°	CHECK:		PART NO. XB-DC235070-0974-20000H
x.x	±0.30	x.x	±1°			
x.xx	±0.20	x.xx	—			
x.xxx	±0.10	x.xxx	—	APPROVED	Andy-liu	SHEET: 1/1 REV.: A1
3RD ANGLE PROJECTION		UNIT: mm			2021.8.14	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------




单重: 0.3g

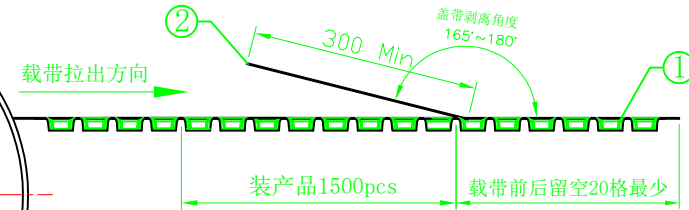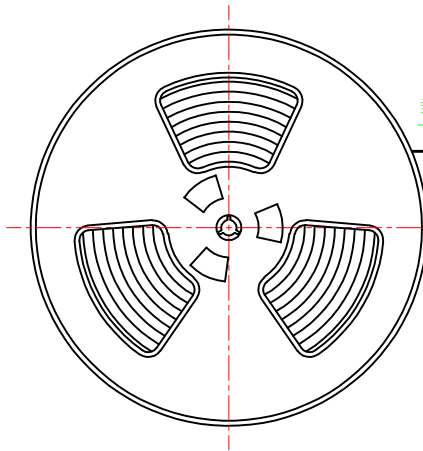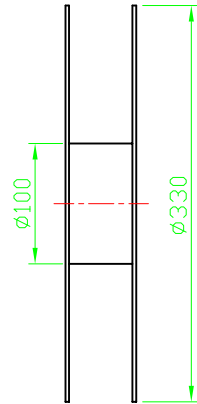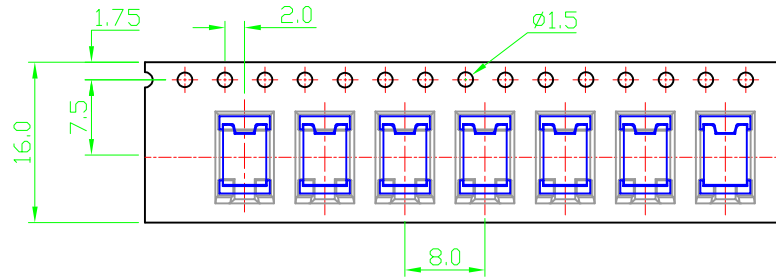

备注:

- 材料规格:
 - 载带:透明
 - 包装盘:蓝色
 - 纸箱: L=350,W=350,H=320
- 包装数量:
1500PCS/卷, 15卷(22500PCS)/箱

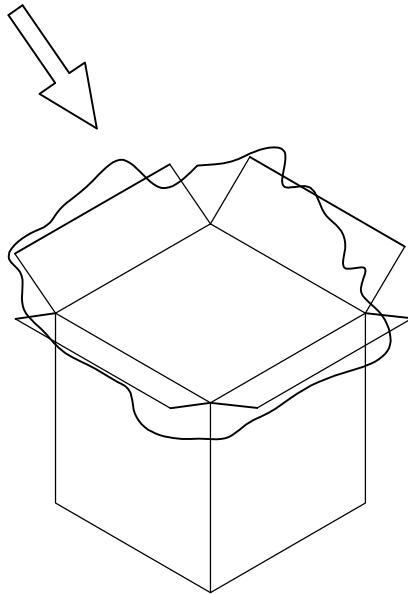

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

UNLESS OTHERWISE SPECIFIED TOLERANCES				XEB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2021.8.14	Φ2.35 DC POWER JACK	
X.	±0.50	X.	±2°	CHECK:		-包装图	
X.X	±0.30	X.X	±1°			PART NO.	
X.XX	±0.20	X.XX				DC235070-0974-20000H	
X.XXX	±0.10	X.XXX				SHEET: 1/1 REV.: A1	
3RD ANGLE PROJECTION				UNIT:	mm	APPROVED	Andy-liu
						2021.8.14	DRAWING NO