

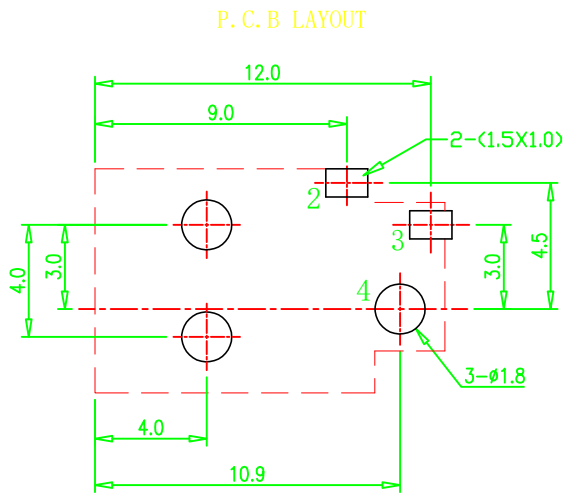
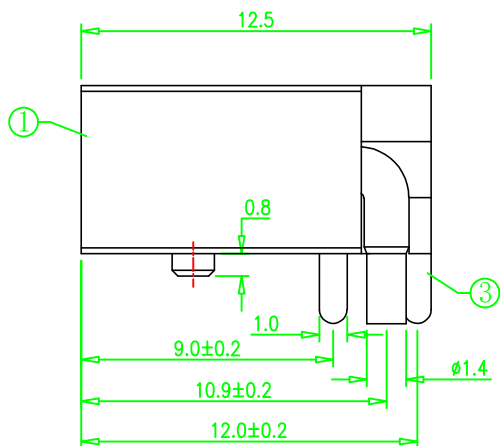
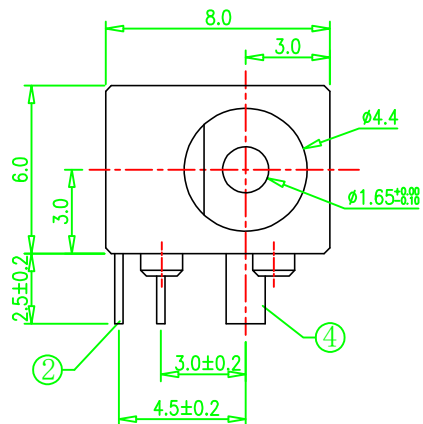
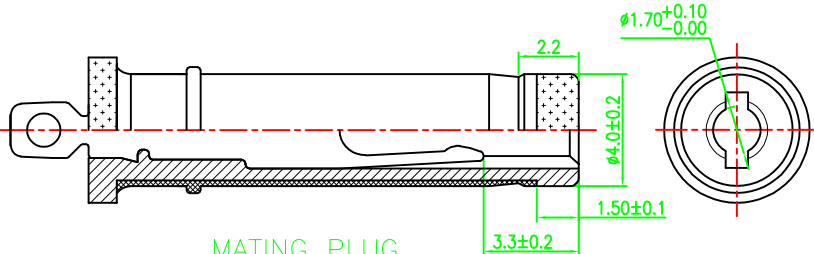


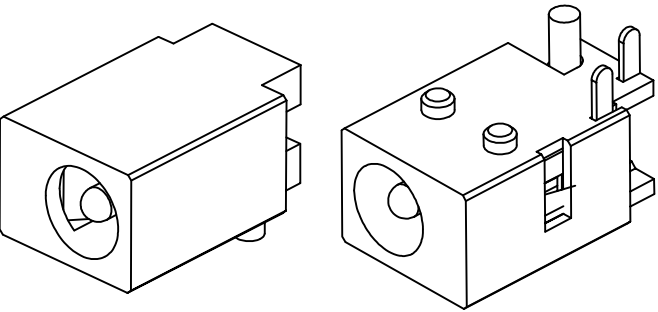


SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

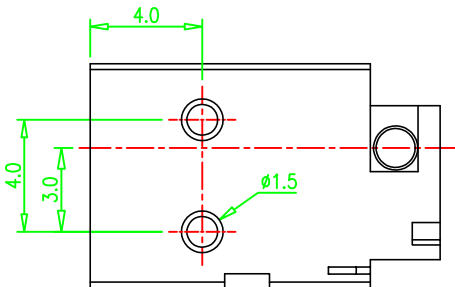

SCHEMATIC



4	PIN	1	BRASS	Ni-Plating
3	2# CONTACT TOOT	1	BRASS	Ag-Plating
2	1# CONTACT TOOT	1	BRONZE	Ag-Plating
1	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:

DIM	TOL
X.	±0.50
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

ANGLES:

DIM	TOL
X.	±2°
X.X	±1°
X.XX	±1°
X.XXX	±1°

3RD ANGLE PROJECTION

UNIT: mm

DESIGN:

2018.7.24

CHECK:

APPROVED

2018.7.24

Tony

Andy-liu

PART NAME:

Φ4.0 H6.0 卧式DIP
DC POWER JACK

PART NO.

XB-DC400170-0041-20000H

SHEET: 1/1




REV.: A1

DRAWING NO



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
8	7	6	5	4

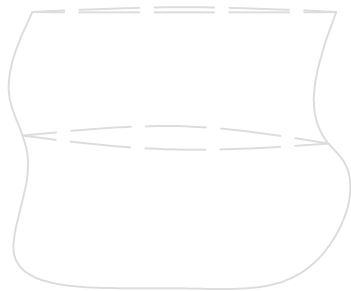


PE袋1000pcs

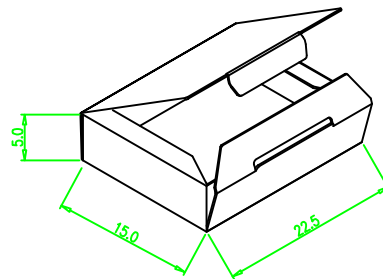


小纸盒 (1000pcs)=1 盒




10 盒



防水袋



DIMENSIONS:
32*24*27
BOX

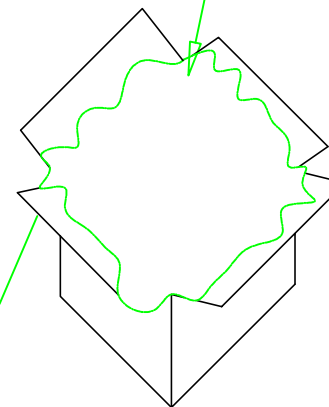

纸箱 (10X1000=10000pcs) =1 箱

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ4.0 H6.0 卧式DIP DC POWER JACK	
DIM	TOL	DIM	TOL		2018.7.24		
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-DC400170-0041-20000H	
X.X	±0.30	X.X	±1°				
X.XX	±0.20	X.XX				SHEET: 1/1 REV.: A1	
X.XXX	±0.10	X.XXX		APPROVED	Andy-liu	DRAWING NO	
3RD ANGLE PROJECTION				UNIT: mm	2018.7.24		