

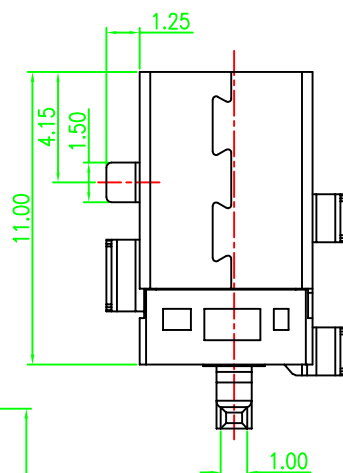
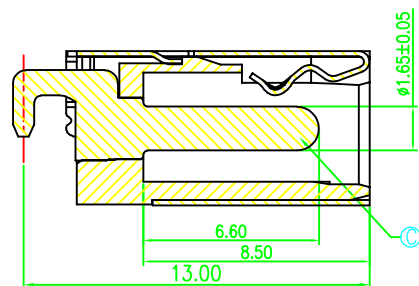
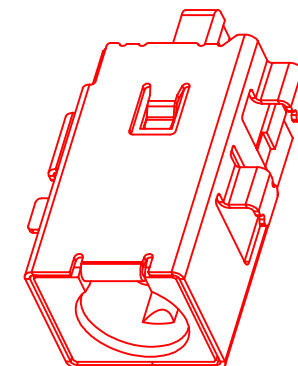
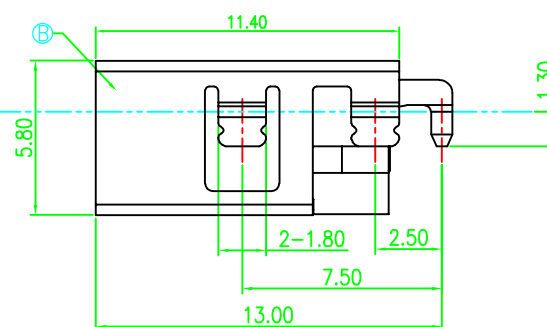
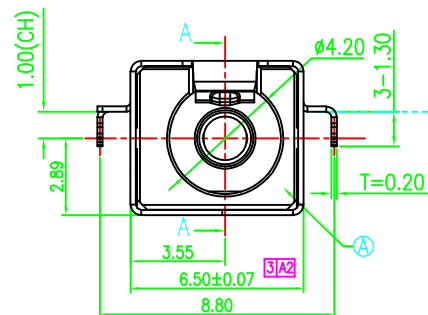


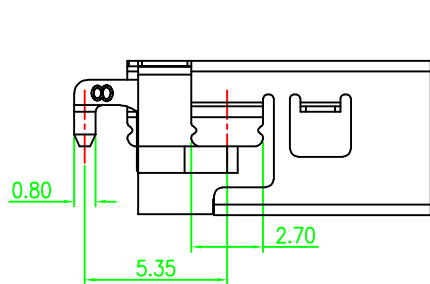



SECTION A-A
8.80

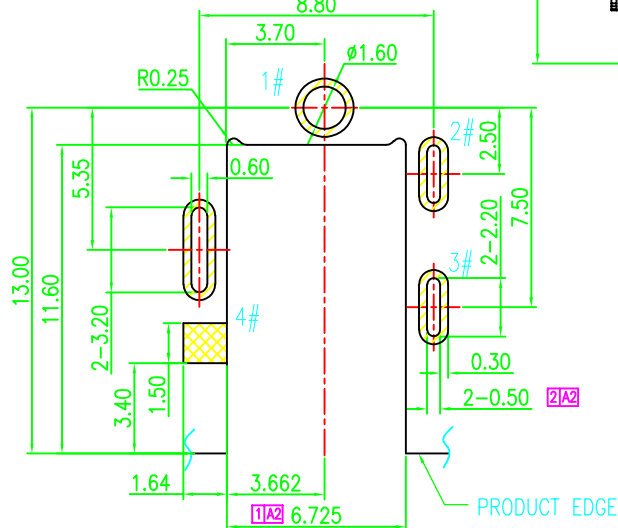

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05
PROHIBITED AREA

SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE:30N MAX.
6. EXTRACTION FORCE:3N MIN.
7. DURABILITY: 5,000 CYCLES

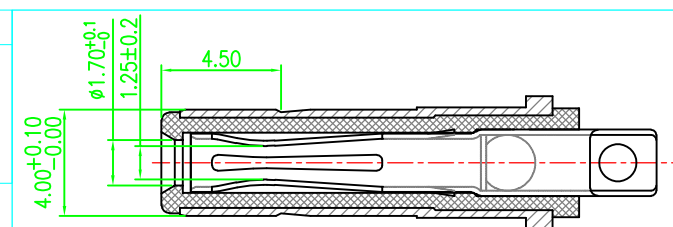

MATING PLUG
DP400170-0038-60000H




NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	CENTER PIN	Zn ALLOY	GOLD FLASH/Ni 50u"	1
B	SHELL	COPPER ALLOY	Ni 50u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.





DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:
DIM	TOL	DIM	TOL	CHECK:	2020.9.7	Φ 4. 0沉板式 (CH=-1. 00)
X.	±0.50	X.	±2°			DC POWER JACK
X.X	±0.30	X.X	±1°		PART NO.	
X.XX	±0.20	X.XX	——			XB-DC400170-0594-30000H
X.XXX	±0.10	X.XXX	——	APPROVED	Andy-Liu	SHEET: 1/1 REV.: A2
				UNIT: mm	2020.9.7	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A2	DC2020090701	1,应客户要求变更LAYOUT尺寸, 2,增加公差	Andy	2020.9.7

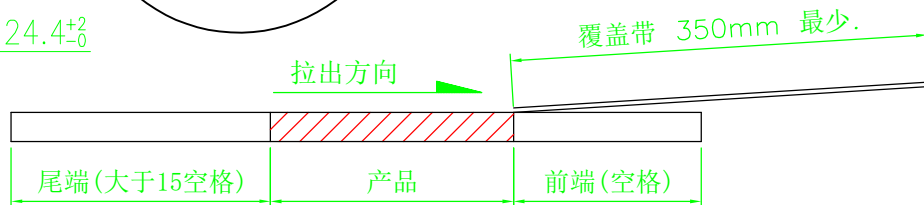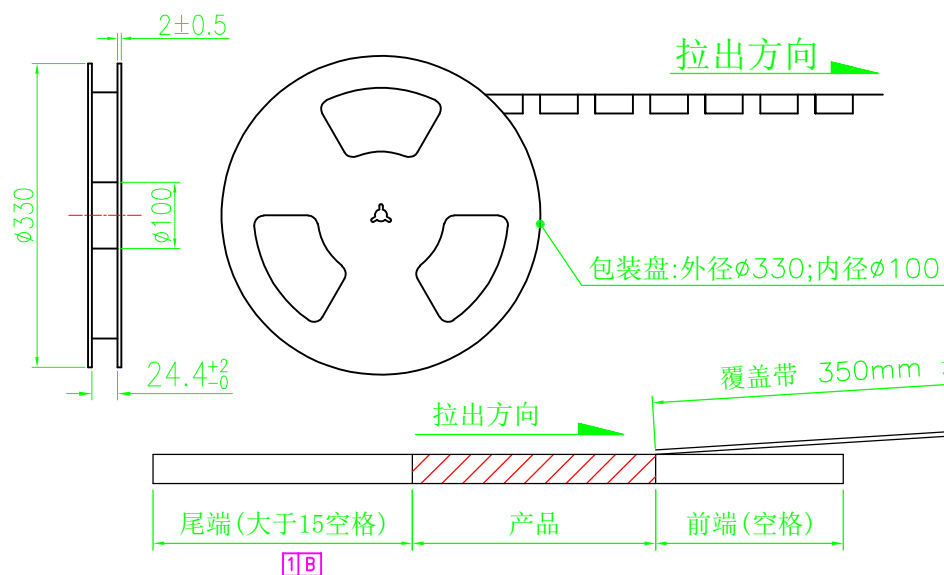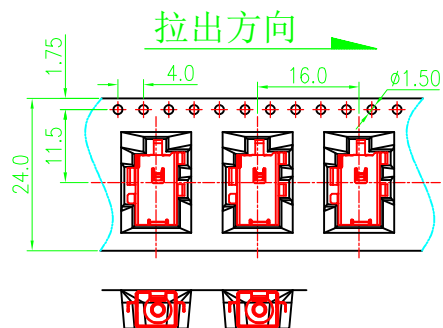


备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=300
- 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拨离力: 0.1N~0.7N(10~70gf);
拨离角度: 165°~180°;
拨离速度: 300mm/分钟.

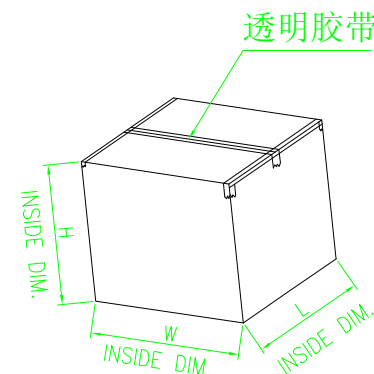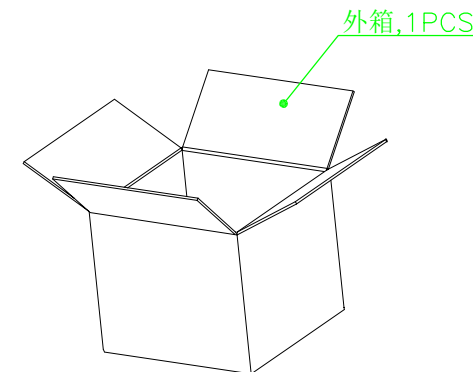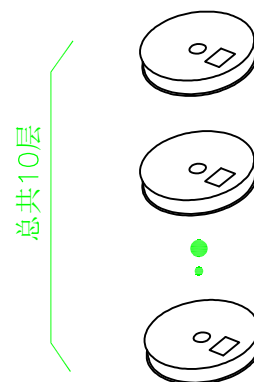

B	EN2020110701	更新载带尾端空格说明	Tony	2020.11.7
REV.	ECN NO.	DESCRIPTION	DESIGN	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCES				XBB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2020.11.7	Φ4.0 沉板式 (CH=-1.0)	
x.	—	x.	—	CHECK:		DC POWER JACK-包装图	
x.x	—	x.x	—			PART NO.	
x.xx	—	x.xx	—			XB-DC400170-0594-30000H	
x.xxx	—	x.xxx	—	APPROVED	Andy-Liu	SHEET: 1/1	REV.: B
		UNIT:			2020.11.7	DRAWING NO	
3RD ANGLE PROJECTION		mm					