


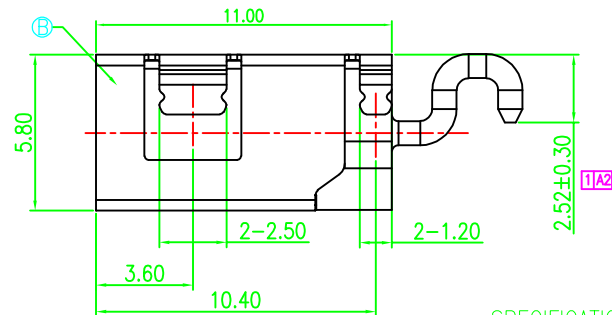
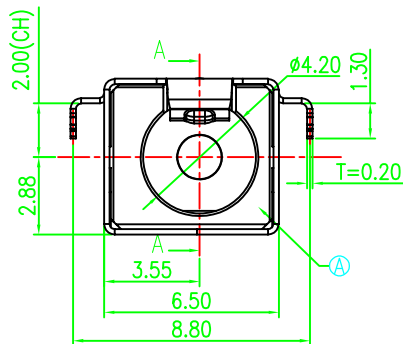


SECTION A-A

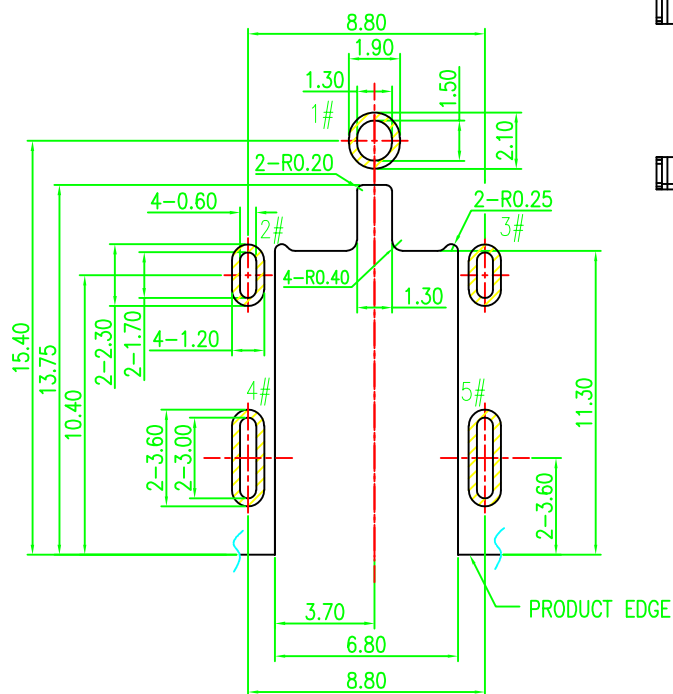


SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 13N~30N
6. EXTRACTION FORCE: 13N~30N
7. DURABILITY: 5,000 CYCLES

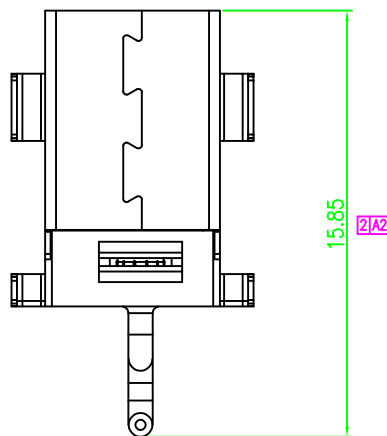

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

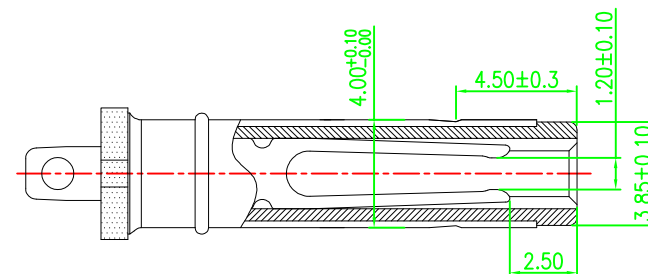

MATING PLUG
P/N:DP400170-0001-60000H

SCHEMATIC		C	CENTER PIN	HBi59	GOLD FLASH/Ni 50u"	1
		B	SHELL	C5210	Ni 50u"	1
		A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL			REMARKS	QTY

1#(+)

2#/3#4#/5#(-)

UNLESS OTHERWISE
SPECIFIED TOLERANCES


DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION


东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME:	
CHECK:		Φ4.0沉板式 (CH=-2.0)	
APPROVED	Andy-liu	DC POWER JACK	
		PART NO.	
		DC400170-0961-30000H	
		SHEET: 1/1	
		REV.: A2	
		DRAWING NO	




A2	EC220407001	变更标准方式, 方便测量	1A2 2A2	Tony	2022.4.7
REV.	ECN NO.	DESCRIPTION		DESIGN	DATE

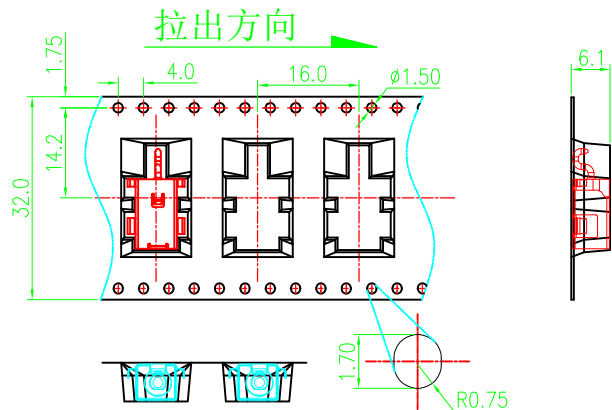

总共10层

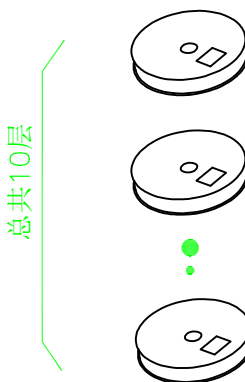

PE袋:

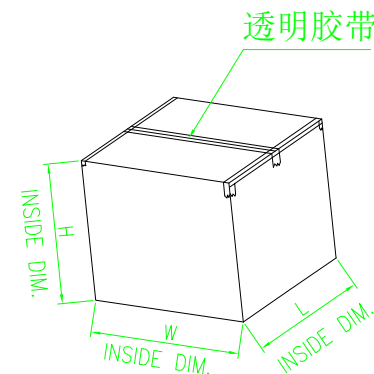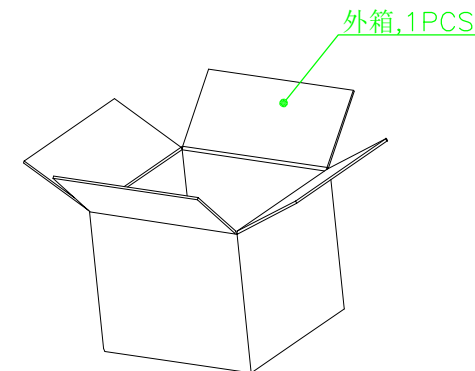

备注:

- 材料规格:
 - 1.1 载带: $T=0.50\text{mm}$, 黑色
 - 1.2 包装盘: 蓝色
 - 1.3 纸箱: $L=335, W=335, H=380$
- 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ (10~70gf);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟.

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
x.	///	x.	///
x.x	///	x.x	///
x.xx	///	x.xx	///
x.xxx	///	x.xxx	///
3RD ANGLE PROJECTION		UNIT: mm	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony 2021.7.12	PART NAME:	$\Phi 4.0$ 沉板式 (CH=-2.0) DC POWER JACK-包装图
CHECK:		PART NO.	XB-DC400170-0961-30000H
APPROVED	Andy-Liu 2021.7.12	SHEET: 1/1	REV.: A
		DRAWING NO	