


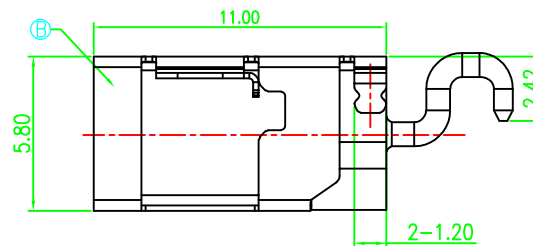


SECTION A-A

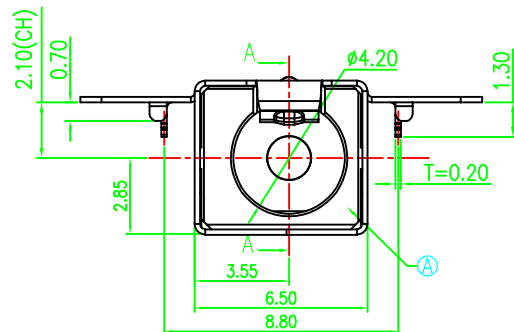


SPECIFICATION:



1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

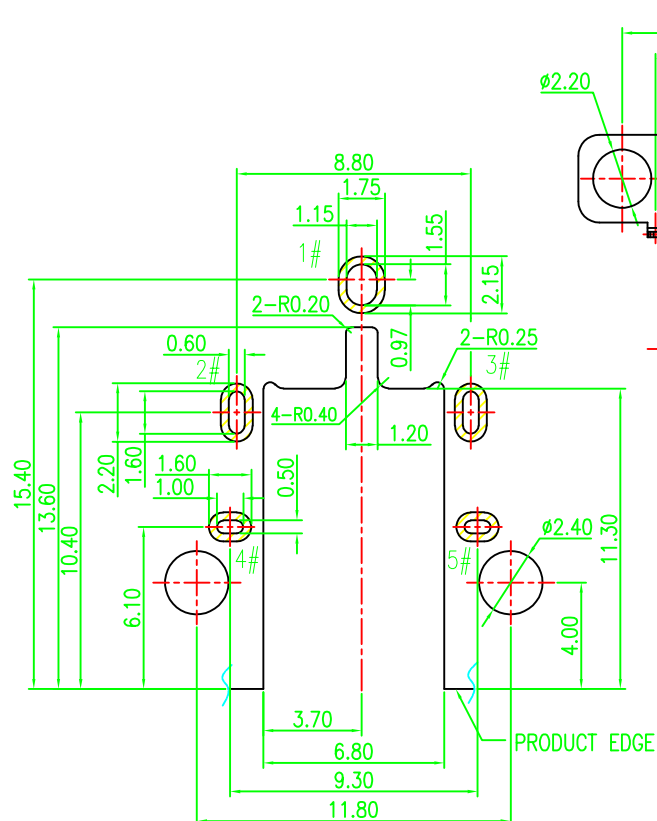

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

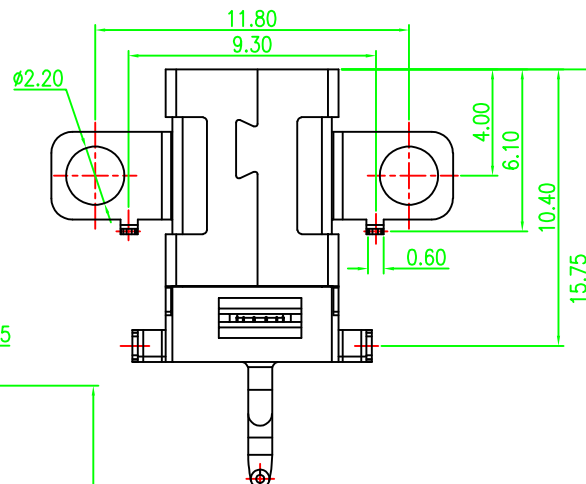

SCHEMATIC

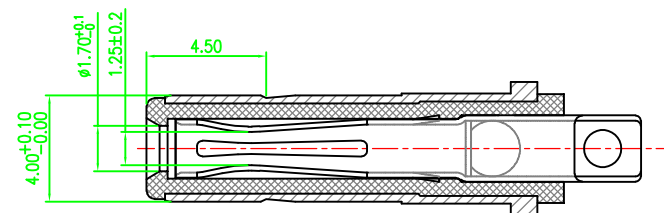

MATING PLUG
DP400170-0038-60000H


NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	CENTER PIN	BRASS	GOLD FLASH"/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Andy	PART NAME:
DIM	TOL	DIM	TOL	Φ4.0沉板式 (CH=-2.10)
X.	±0.50	X.	±2°	DC POWER JACK
X.X	±0.30	X.X	±1°	PART NO.
X.XX	±0.20	X.XX		XB-DC400170-1088-20000H
X.XXX	±0.10	X.XXX		SHEET: 1/1 REV.: A1
3RD ANGLE PROJECTION	UNIT: mm	APPROVED	Peter	DRAWING NO
			2022.4.22	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

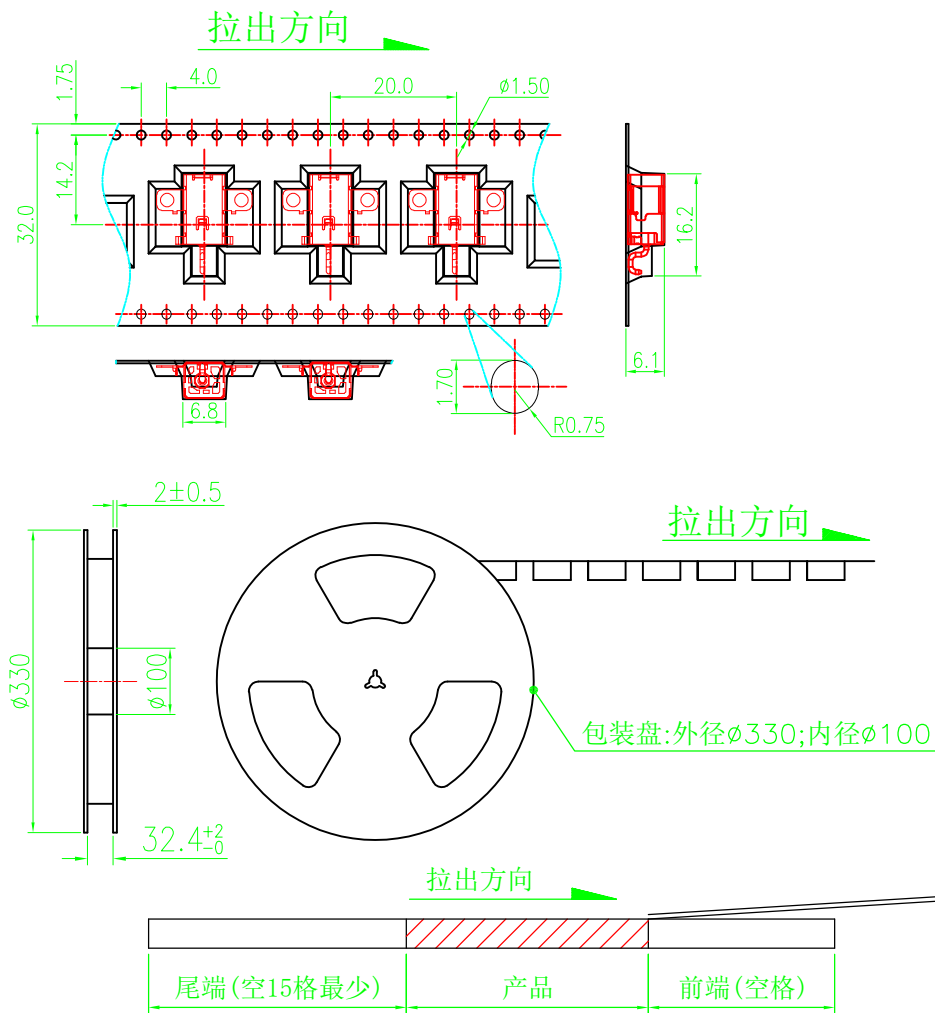


备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$, 黑色
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=380$
- 包装数量:
500PCS/卷, 10卷(5000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟 .




总共10层

PE袋:

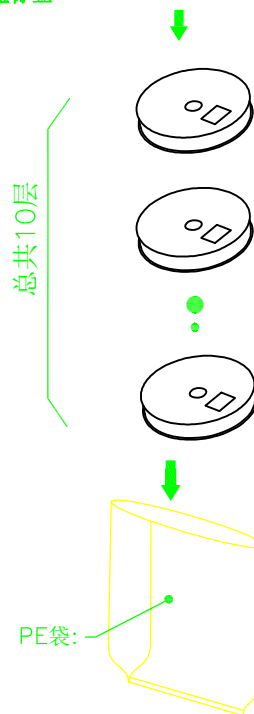

外箱, 1PCS

透明胶带

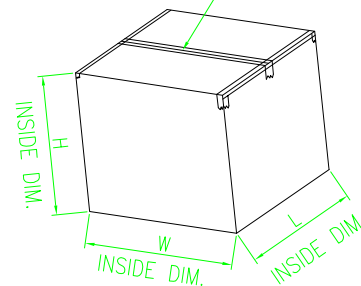

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2022.4.22	$\Phi 4.0$ 沉板式 ($CH=-2.10$)	
x.	—	x.	—	CHECK:		DC POWER JACK-包装图	
x.x	—	x.x	—			PART NO.	
x.xx	—	x.xx	—			XB-DC400170-1088-20000H	
x.xxx	—	x.xxx	—	APPROVED	Andy-Liu	SHEET: 1/1	REV.: A
3RD ANGLE PROJECTION		UNIT: mm			2022.4.22	DRAWING NO	