


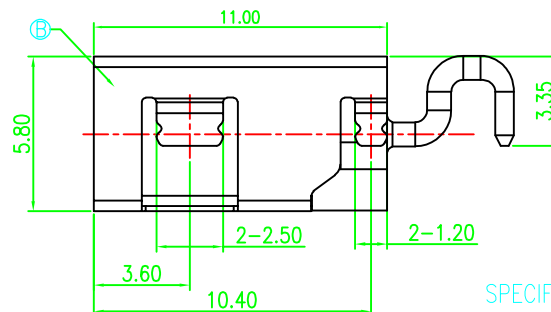


SECTION A-A

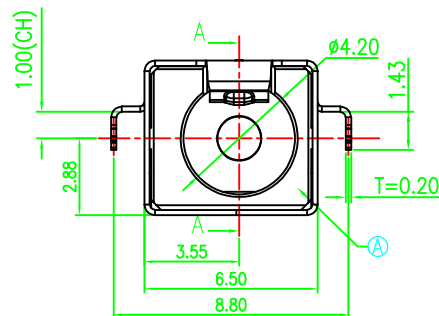


SPECIFICATION:



1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

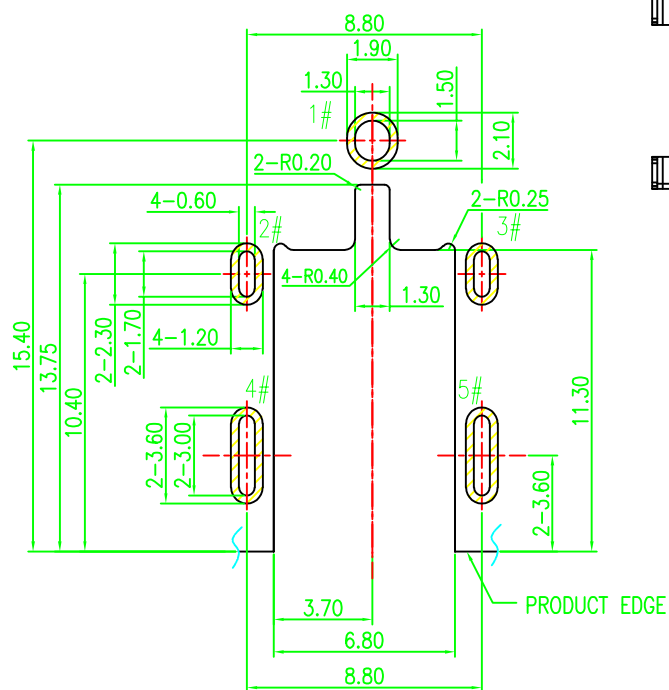

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

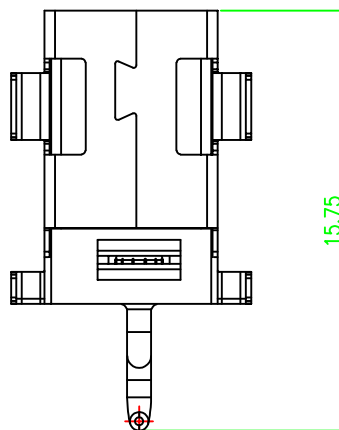

SCHEMATIC

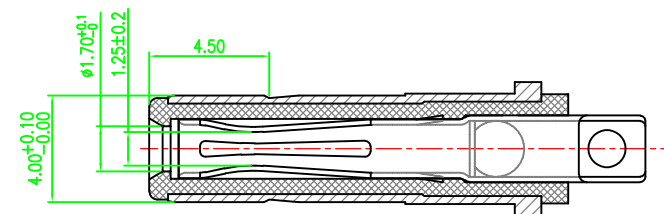

MATING PLUG
DP400170-0038-60000H

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

UNLESS OTHERWISE
SPECIFIED TOLERANCES



DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	±1°
X.XXX	±0.10	X.XXX	±1°




东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME:	
CHECK:		Φ4.0沉板式 (CH=-1.00)	
APPROVED:	Andy	DC POWER JACK	
		PART NO.	
		XB-DC400170-1090-20000H	
		SHEET: 1/1 REV.: A1	
		DRAWING NO	


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

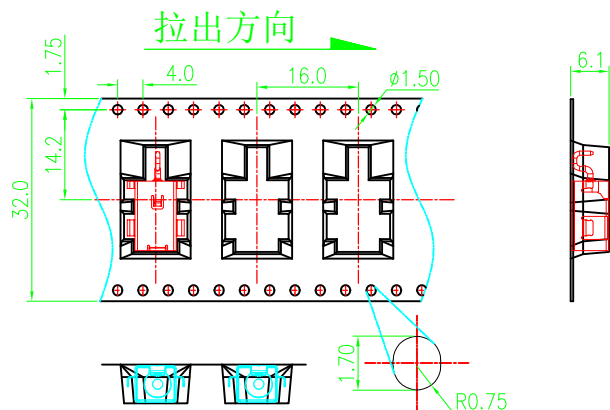


包装盘标签

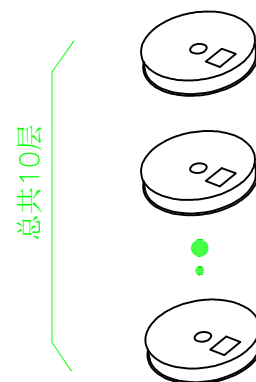


总共10层




PE袋:

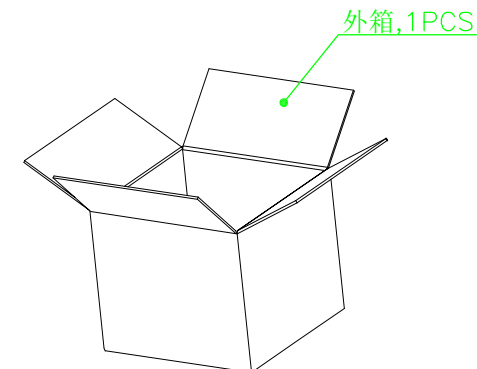

外箱, 1PCS

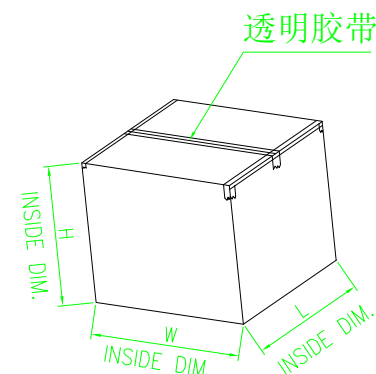

透明胶带

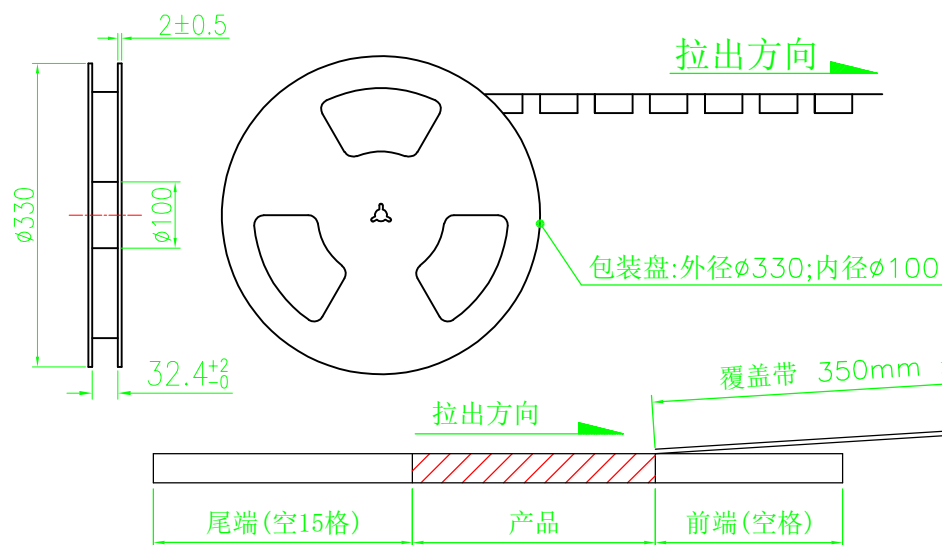

包装盘: 外径330; 内径100

覆盖带 350mm 最少.

备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=380
- 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拨离力: 0.1N~0.7N(10~70gf);
拨离角度: 165°~180°;
拨离速度: 300mm/分钟.

UNLESS OTHERWISE SPECIFIED TOLERANCES				XJB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2019.10.12	Φ4.0 沉板式 (CH=-1.0)	
x.	—	x.	—	CHECK:		DC POWER JACK-包装图	
x.x	—	x.x	—			PART NO.	
x.xx	—	x.xx	—			XB-DC400170-1090-20000H	
x.xxx	—	x.xxx	—			SHEET: 1/1 REV.: A	
3RD ANGLE PROJECTION				UNIT: mm	APPROVED	Andy-Liu	DRAWING NO
					2019.10.12		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------