


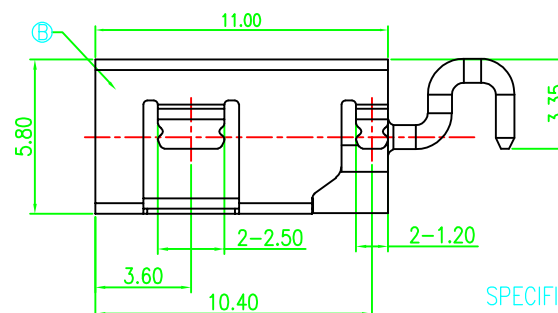


SECTION A-A



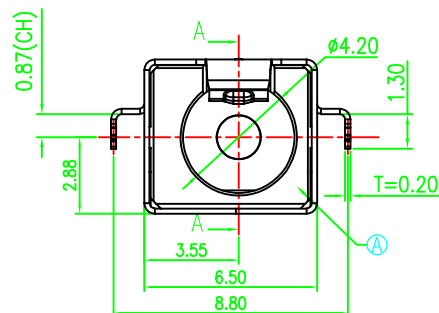


SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

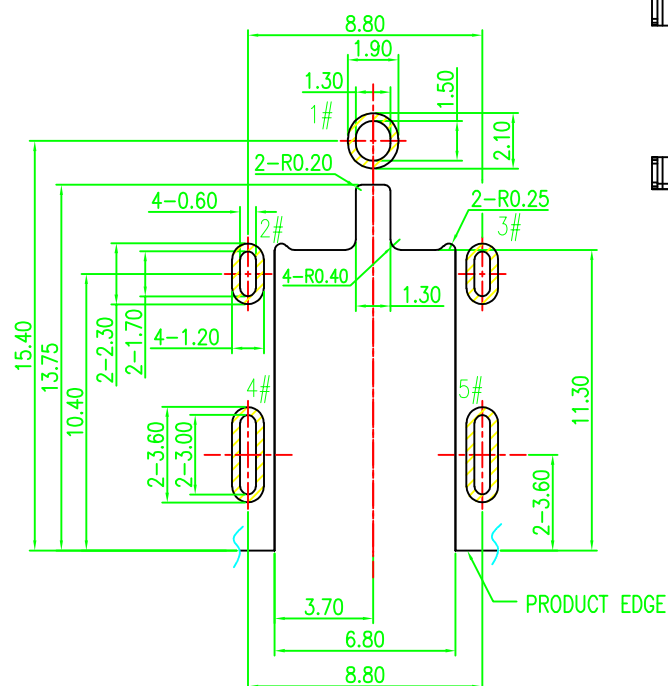

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

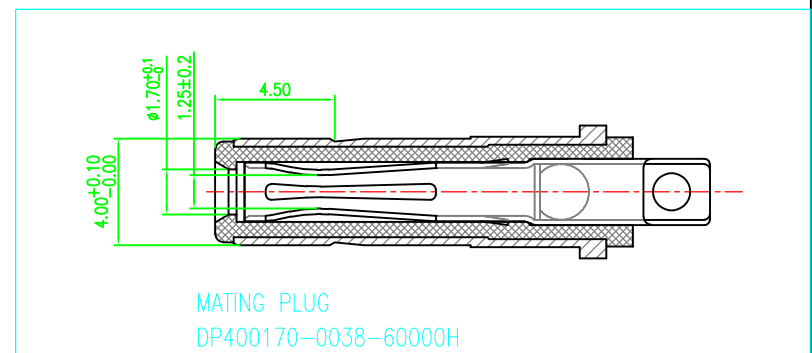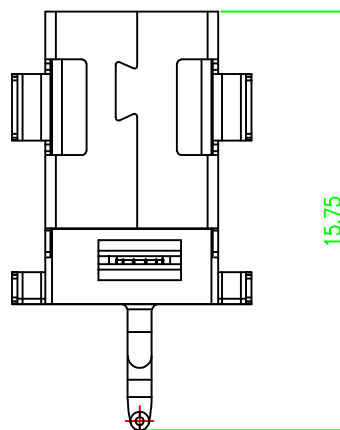


C	CENTER PIN	BRASS	GOLD FLASH"/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:		
DIM	TOL	DIM	TOL		2022.4.22	Φ 4. 0沉板式 (CH=-0. 87)		
X.	±0.50	X.	±2°	CHECK:		DC POWER JACK		
X.X	±0.30	X.X	±1°				PART NO.	
X.XX	±0.20	X.XX	——				XB-DC400170-1091-20000H	
X.XXX	±0.10	X.XXX	——	APPROVED	Andy	SHEET: 1 / 1 REV.: A1		
		UNIT:	mm		2022.4.22	DRAWING NO		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

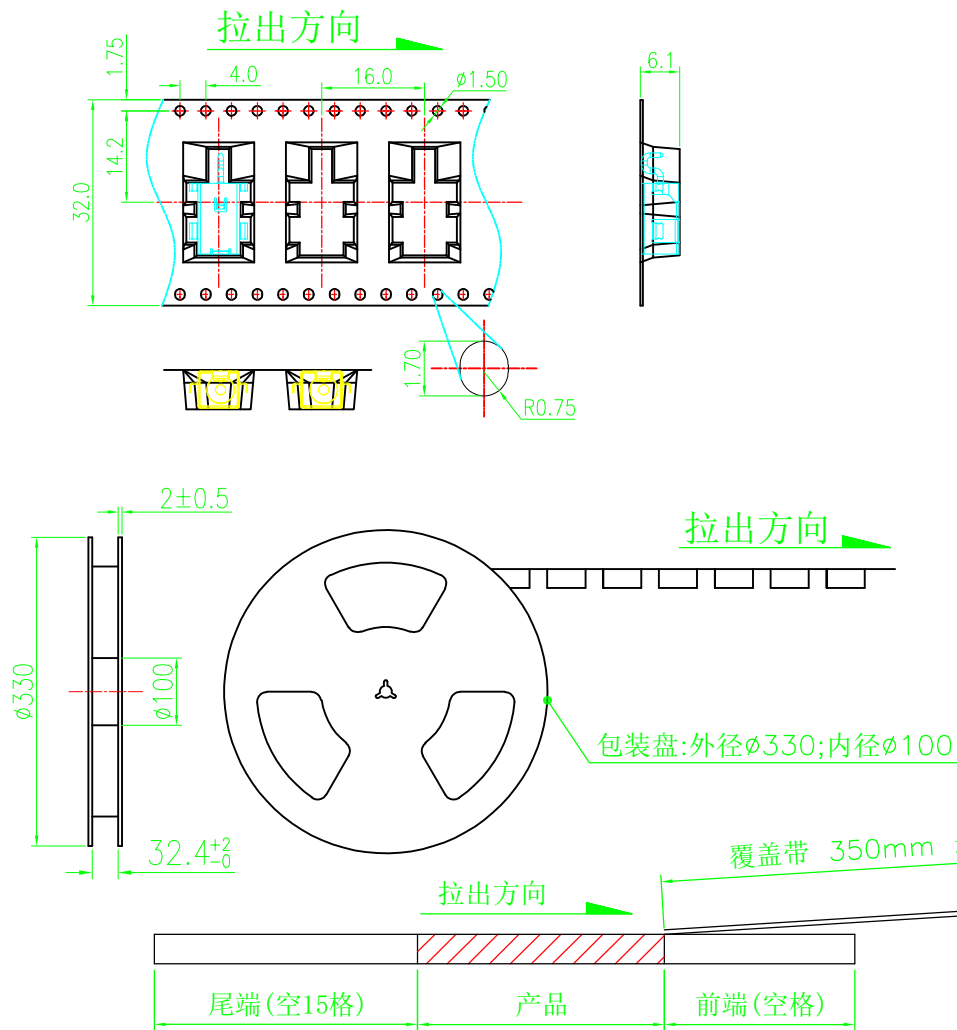

备注:

- 材料规格:
 - 载带:T=0.50mm,黑色
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=380
- 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.



总共10层

PE袋:

外箱,1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2022.4.22	Φ4.0 沉板式(CH=0.87)	
x.	—	x.	—			DC POWER JACK-包装图	
x.x	—	x.x	—			PART NO.	
x.xx	—	x.xx	—			XB-DC400170-1091-20000H	
x.xxx	—	x.xxx	—	APPROVED	Andy-Liu	SHEET: 1/1 REV.: A	
3RD ANGLE PROJECTION				UNIT: mm	2022.4.22	DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------