

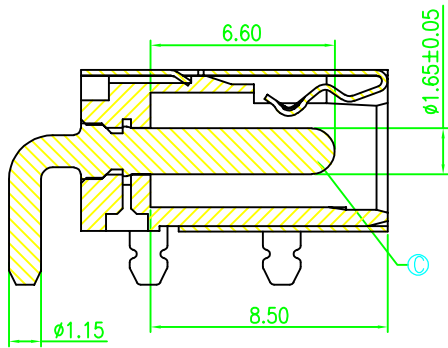

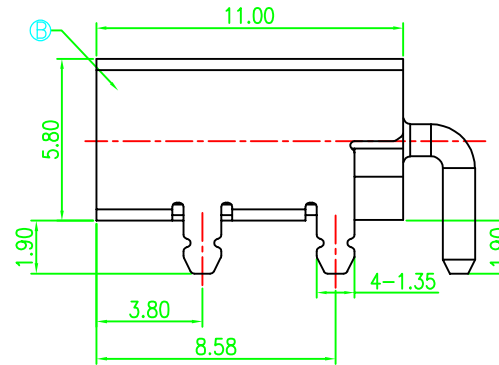


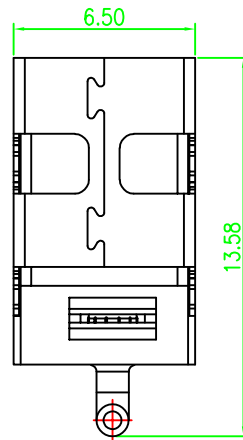


SECTION A-A





SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

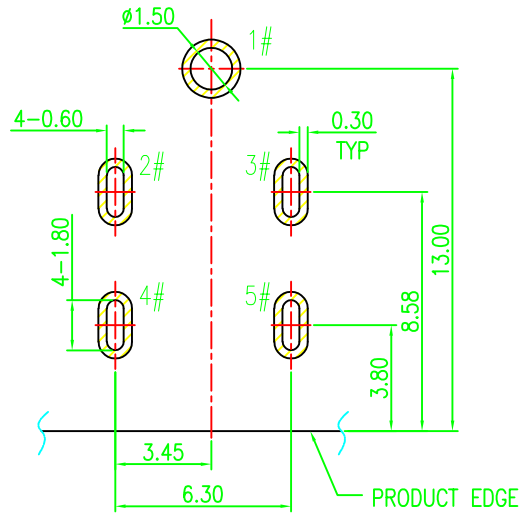

RECOMMENDED PCB LAYOUT(T=1.00)
TOP VIEW TOLERANCE:±0.05

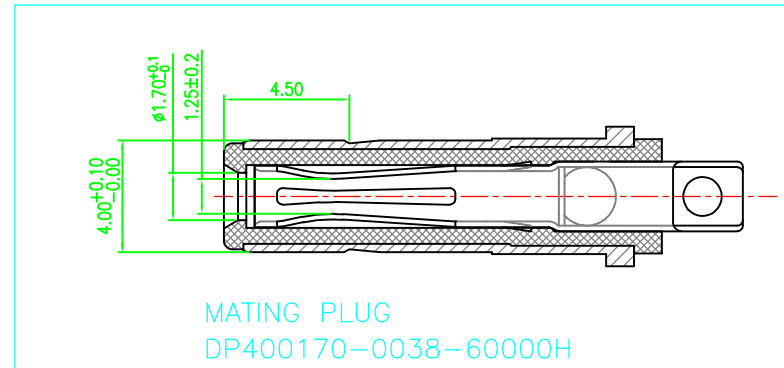

C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—





UNIT: mm

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME: Φ4.0板上型 DC POWER JACK
CHECK:		
APPROVED	Andy	PART NO. XB-DC400170-1094-20000H
	2022.4.22	SHEET: 1/1 REV.: A1
		DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

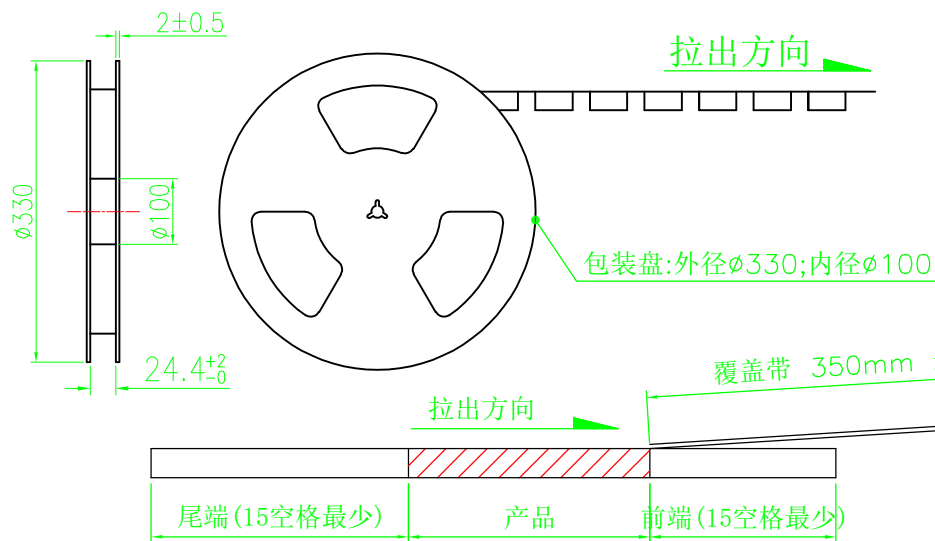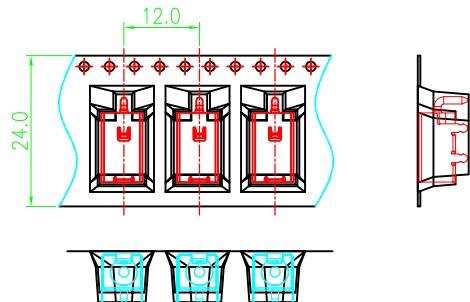

拉出方向

包装盘:外径φ330;内径φ100

覆盖带 350mm 最少.

尾端(15空格最少)

产品

前端(15空格最少)

拉出方向

备注:

1. 材料规格:

1.1 载带:T=0.50mm,黑色

1.2 包装盘:蓝色

1.3 纸箱: L=335,W=335,H=300

2. 包装数量:

600PCS/卷, 10卷(6000PCS)/箱

3. 上盖带拔离力: 0.1N~0.7N(10~70gf);

拔离角度: 165°~180°;

拔离速度: 300mm/分钟.

包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带

INSIDE DIM.

W

INSIDE DIM.

L

H

UNLESS OTHERWISE SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	///	X.	///
X.X	///	X.X	///
X.XX	///	X.XX	///
X.XXX	///	X.XXX	///

3RD ANGLE PROJECTION

UNIT: mm

DESIGN:	Tony
CHECK:	
APPROVED	Andy-Liu
	2022.4.25

PART NAME:	
Φ4.0 板上型	
DC POWER JACK-包装图	
PART NO.	
XB-DC400170-1094-20000H	
SHEET: 1/1	REV.: A
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------