

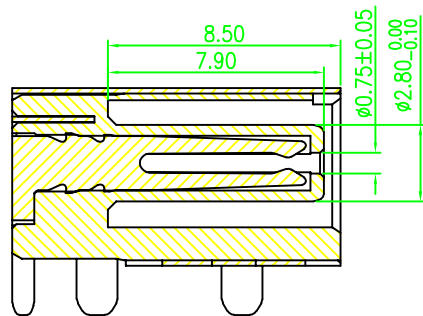

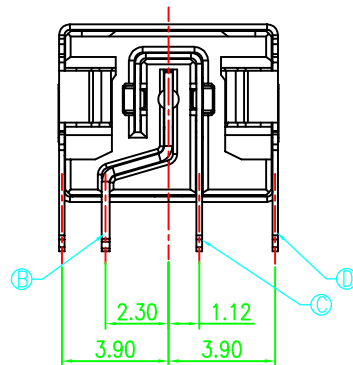
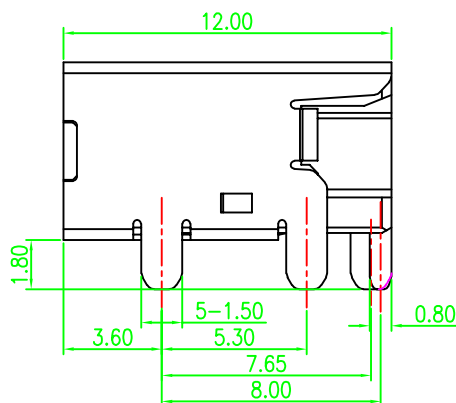
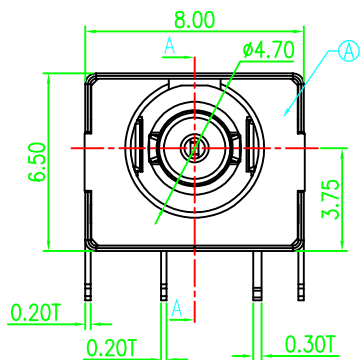




SECTION A-A

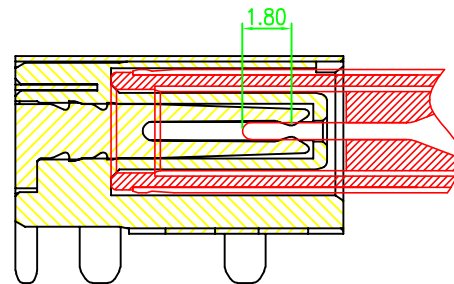




SPECIFICATION:

1. RATING: DC 20V 6.5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

SCHEMATIC

- 2#(+)
- 1#(SIGNAL)
- 3#(-)

MATING PLUG

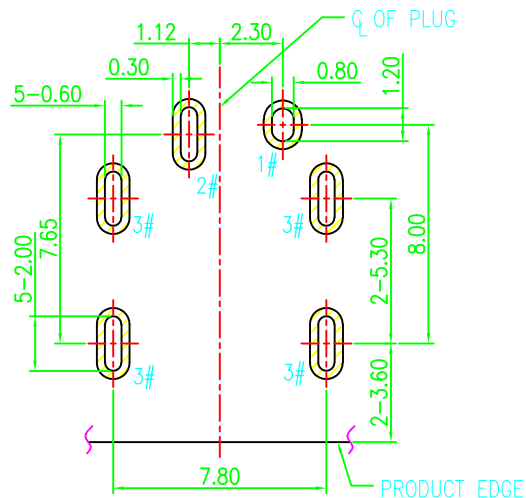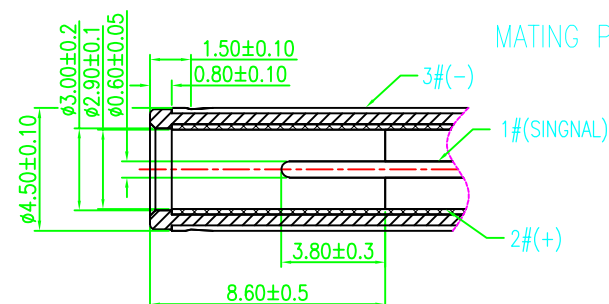

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

D	SHELL	C5210	Ni 50u"MIN.	1
C	SPRING	C5210	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
B	CENTER PIN	C5210	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DESIGN:	Tony	PART NAME:	Φ4.50xΦ0.60 H6.50 卧式 DC POWER JACK
CHECK:		PART NO.	XB-DC450060-0355-20000H
APPROVED:	Andy-Liu	SHEET: 1/1	REV.: A1
3RD ANGLE PROJECTION	UNIT: mm	DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

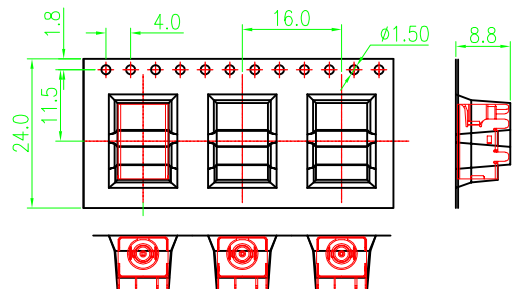

拉出方向

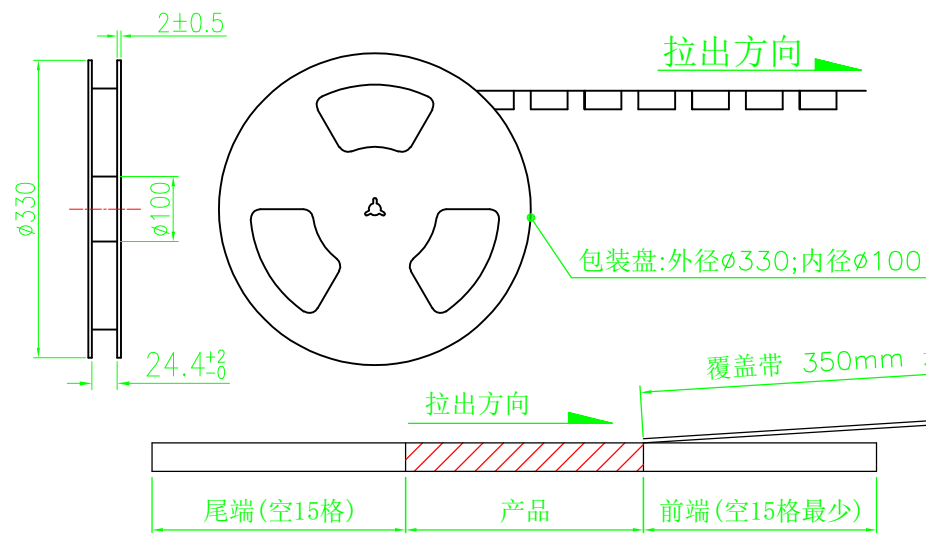

备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=300
- 包装数量:
400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

包装盘标签

总共10层

PE袋:

外箱, 1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	///	X.	///
X.X	///	X.X	///
X.XX	///	X.XX	///
X.XXX	///	X.XXX	///
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony
CHECK:	
APPROVED	Andy-Liu
	2019.11.12

PART NAME:	Φ4.50xΦ0.60 H6.50卧式DC POWER JACK-包装图
PART NO.	XB-DC450060-0355-20000H
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------