



SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: 20V, 10A .
- 1-2. CONTACT RESISTANCE:
50 MILLIOHMS Max. FOR INITIAL,
80 MILLIOHMS Max. AFTER 5000 CYCLES.
- 1-3. INSULATION RESISTANCE: 100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.
- 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V
RMS AFTER 1 MINUTE.

2. MECHANICAL CHARACTERISTICS:




- 2-1. INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)
- 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)
- 3. LIFE TEST: 5,000 CYCLES MIN.

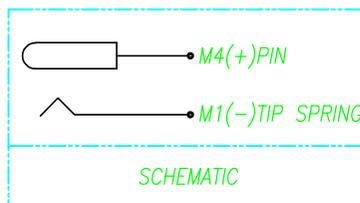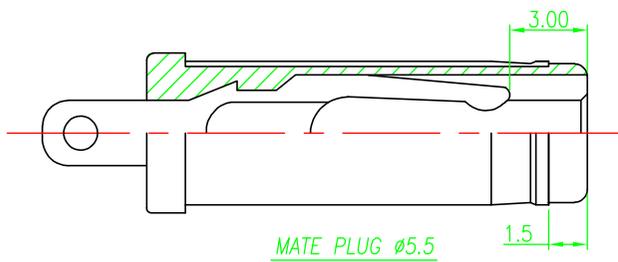

⑥	PIN	1	BRASS BAR	Au-Plated
⑤	HOUSING	1	HIGH TEMP.THERMOPLASTIC	Black
④	TERMINAL	1	STAINLESS STEEL t=0.30	N/A
③	GROUND	1	STAINLESS STEEL t=0.10	Ni-Plated
②	TIP SPERING	1	COPPER ALLOY t=0.20	Ag-Plated
①	SHELL	1	STAINLESS STEEL t=0.20	Sn-Plated



UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	
DECIMALS:	ANGLES:	DESIGN:	Tony 2022.8.24
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—
UNIT: mm		CHECK:	
APPROVED		DESIGN:	Andy 2022.8.24
PART NAME:		① 5.50 焊线式 DC POWER JACK	
PART NO.		XB-DC550250-0114-60000H	
SHEET: 1/1		REV.: A1	
DRAWING NO			

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

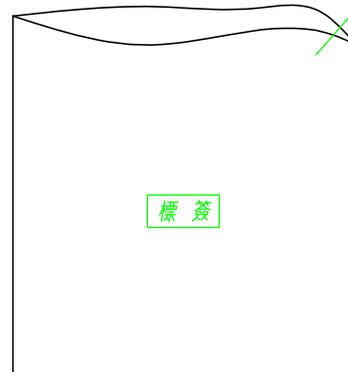
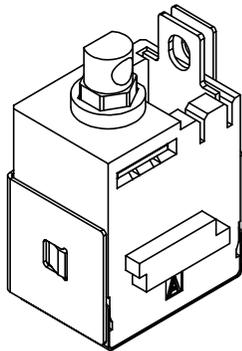


500PCS/PE袋

標籤

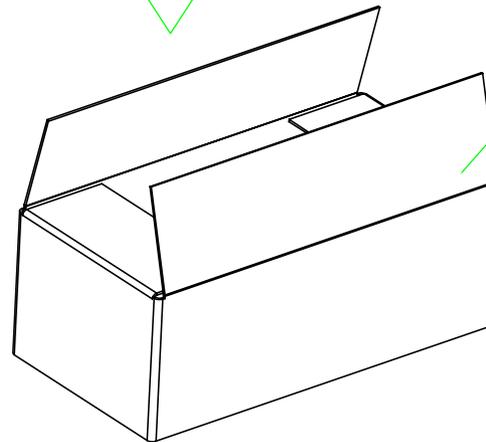

3000PCS/內盒

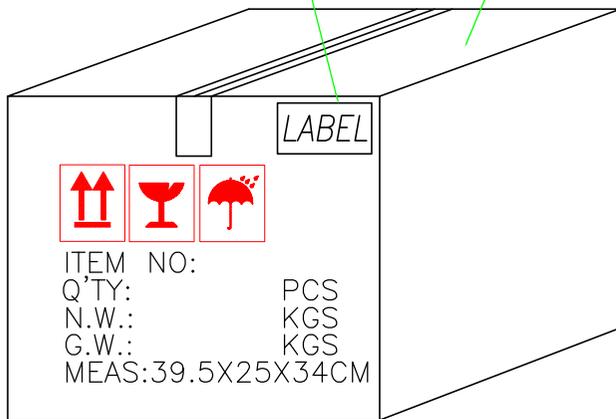

出貨標籤

9000PCS/外箱

LABEL



ITEM NO:
Q'TY: PCS
N.W.: KGS
G.W.: KGS
MEAS: 39.5X25X34CM

名称	规格	用量(PCS)
成品		9000
PE袋	220x210x0.08	18
干燥剂		18
內盒	308x229x111	3
外箱	395x250x340	1

UNLESS OTHERWISE SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

DESIGN:	Tony
	2018.10.17
CHECK:	
APPROVED	Andy
	2018.10.17

PART NAME:	Φ5.50 焊线式 DC POWER JACK-包装图
PART NO.	XB-DC550250-0114-60000H
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE



UNIT: mm