

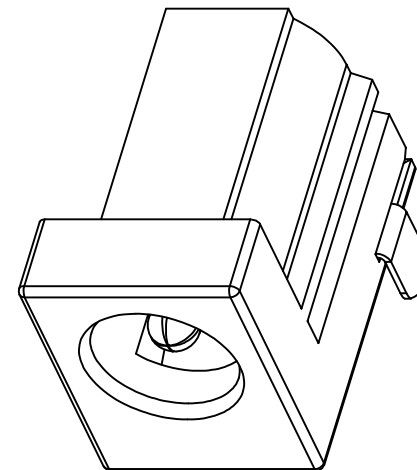
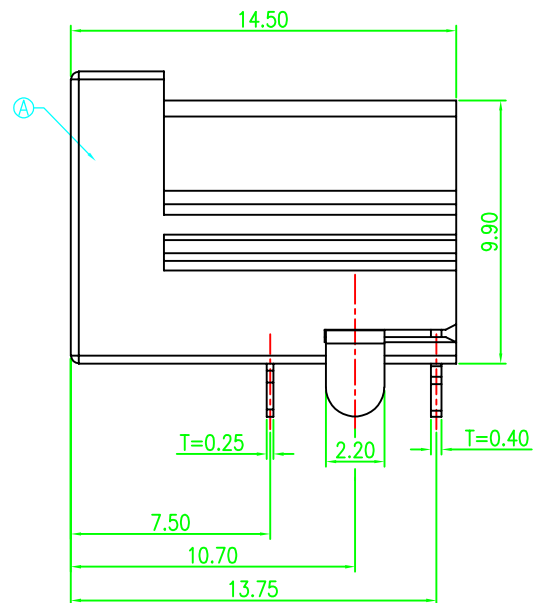
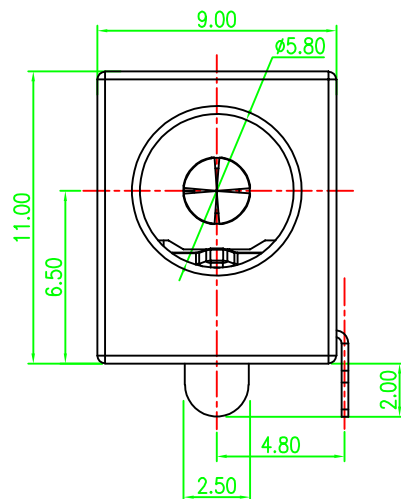
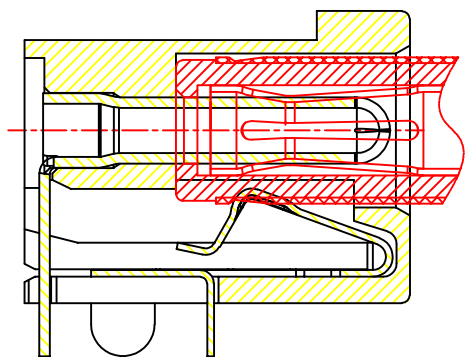



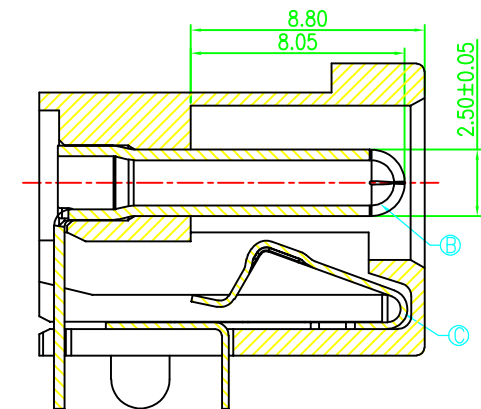


SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

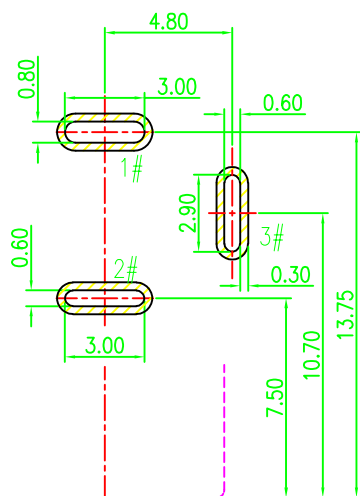

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

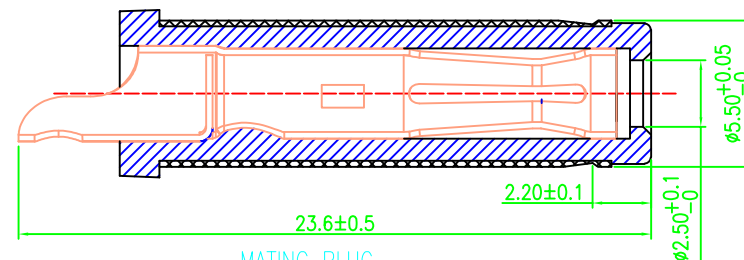

MATING PLUG
P/N.: DP550250-0063-60000H

C	SPRING	COPPER ALLOY	Sn80u" MIN./Ni 40u".	1
B	CENTER PIN	BRASS	Sn80u" MIN./Ni 40u".	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2019.11.29	Φ5.5XΦ2.5 H11.0卧式	
X.	±0.50	X.	±2°		DC POWER JACK		
X.X	±0.30	X.X	±1°		PART NO.	XB-DC550250-0366-20000H	
X.XX	±0.20	X.XX	—			SHEET: 1/1	REV.: A1
X.XXX	±0.10	X.XXX	—	APPROVED	Andy-liu		
		UNIT: mm		2019.11.29			

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

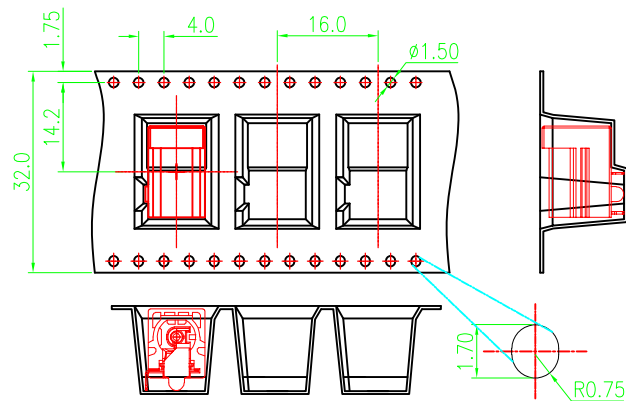


拉出方向

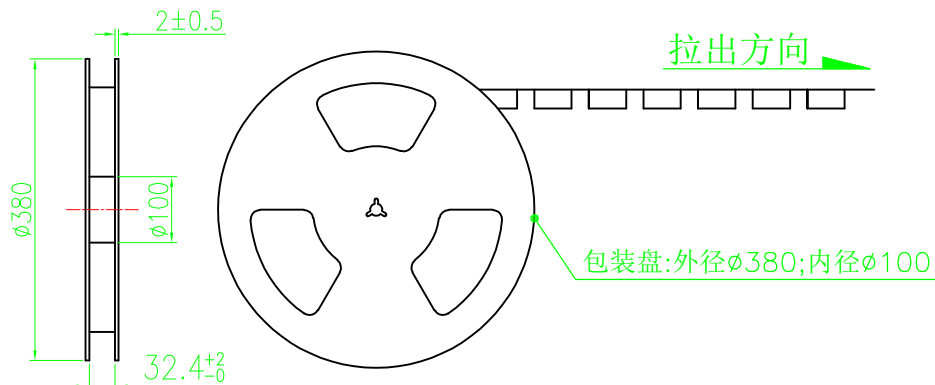

包装盘:外径 ϕ 380;内径 ϕ 100

拉出方向



备注:

- 材料规格:
 - 载带:透明
 - 包装盘:蓝色
 - 纸箱: L=385,W=385,H=380
- 包装数量:
400PCS/卷, 10卷(4000PCS)/箱

包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	///	X.	///
X.X	///	X.X	///
X.XX	///	X.XX	///
X.XXX	///	X.XXX	///
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony
2019.11.29	
CHECK:	
APPROVED	Andy-Liu
2019.11.29	

PART NAME:	
ϕ 5.5 H11.0卧式 DC POWER JACK-包装图	
PART NO.	
XB-DC550250-0366-20000H	
SHEET: 1/1	REV.: A
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------