


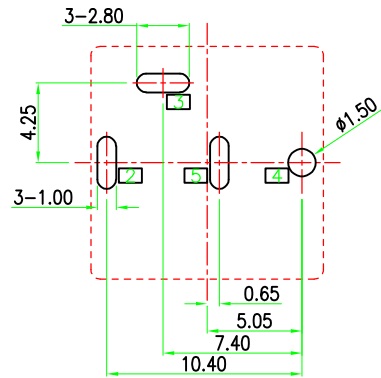

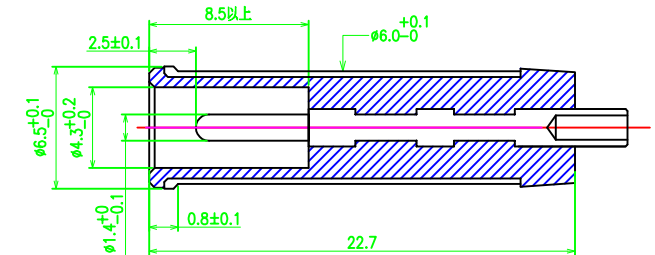
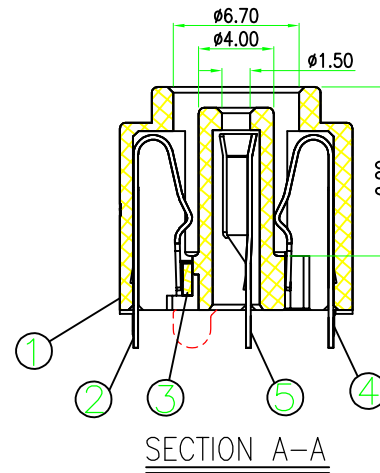
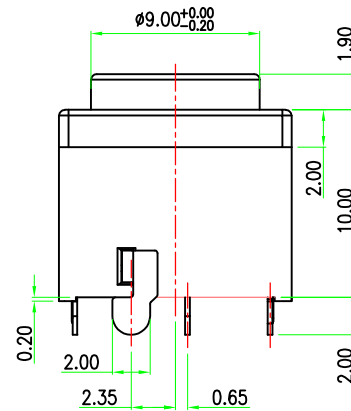





Mounting Dimension(Copper Side View)
Tolerance ± 0.1




MATING PLUG
P/N.: DP650140-0076-60000H



⑤	CENTER CONTACT	1	C5191 T=0.25	Tin PLATED 50u*MIN
④	SPRING CONTACT	1	C5191 T=0.25	Tin PLATED 50u*MIN
③	SHUNT CONTACT	1	C2680 T=0.50	Ni&Tin PLATED 50u*MIN
②	SWITCH CONTACT	1	C5191 T=0.25	Tin PLATED 50u*MIN
①	DC-HOUSING	1	PA9T UL94V-0	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED TOLERANCES		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	
 3RD ANGLE PROJECTION		UNIT: mm	
DESIGN:		Tony	2021.10.28
CHECK:			
APPROVED:		Andy	2021.10.28
PART NAME: DC JACK			
PART NO.: XB-DC650140-1032-20000H			
SHEET: 1/1		REV.: A1	




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------




客户出料方向



300PCS/盘

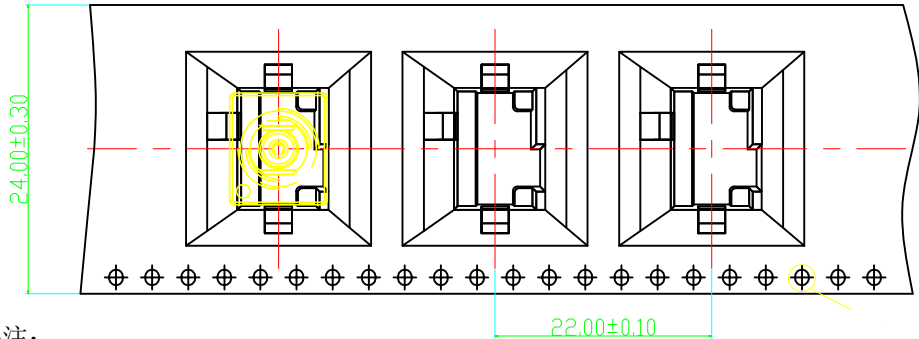


三角护角板

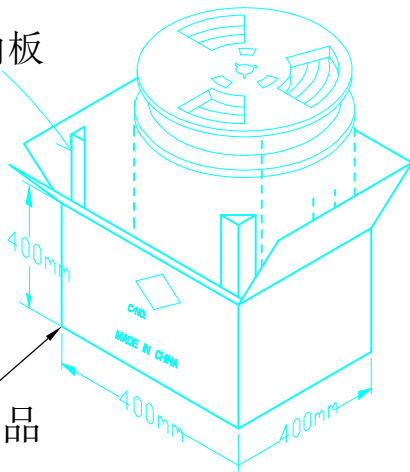

1 箱=10盘
= 3000 PCS成品

- 备注:
1. 包装数量:250 PCS/REEL.
 2. 使用15" REEL按规要求包装.
 3. 按照下图方式将封好的REEL做剥离测试(30-90g) .
- 剥离速度:300±10 mm/分

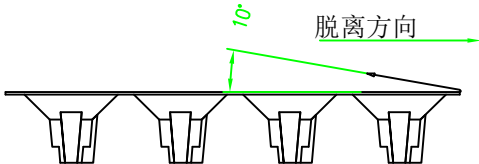

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	

3RD ANGLE PROJECTION

DESIGN:
CHECK:
APPROVED:

Tony
2021.10.28
Andy
2021.10.28

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME:
DC JACK
-包装图
PART NO.:
XB-DC650140-1032-20000H
SHEET: 1/1 REV.: A1

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------