
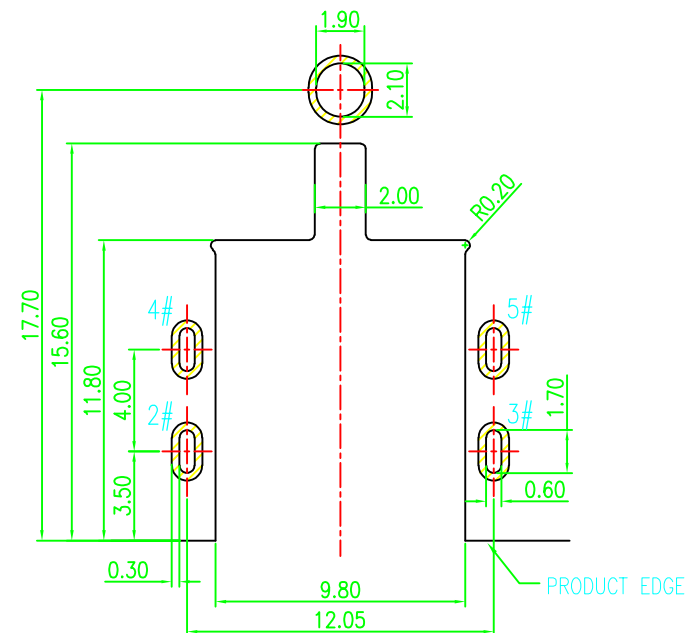
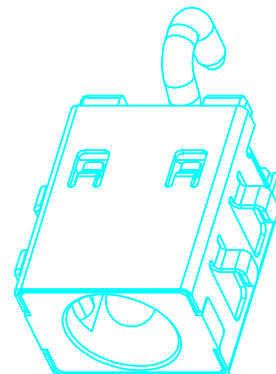
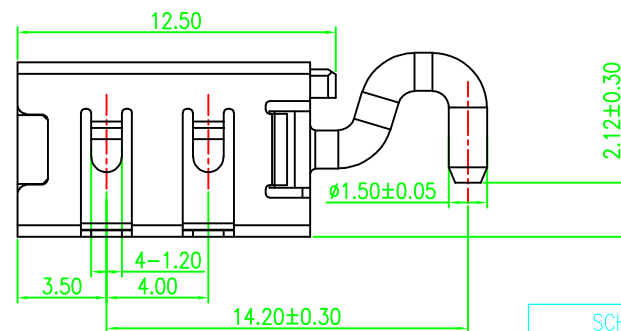
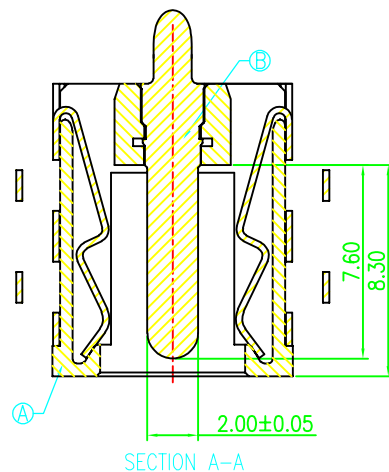


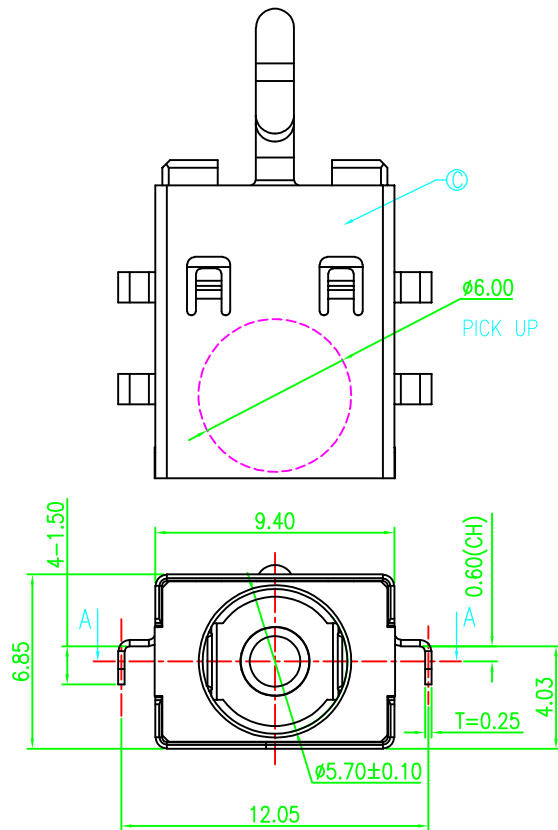

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

SPECIFICATION:

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2022.6.10	Φ 5.5 卧式 DC POWER JACK	
X.	±0.50	X.	±2°	CHECK:		PART NO.	
X.X	±0.30	X.X	±1°			XB-DC550200-1159-20000H	
X.XX	±0.20	X.XX	////	APPROVED	Andy	SHEET: 1/1 REV.: A1	
X.XXX	±0.10	X.XXX	////		2022.6.10	DRAWING NO	
		UNIT:					
3RD ANGLE PROJECTION		mm					


MATING PLUG
DP550200-0129-60000H

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

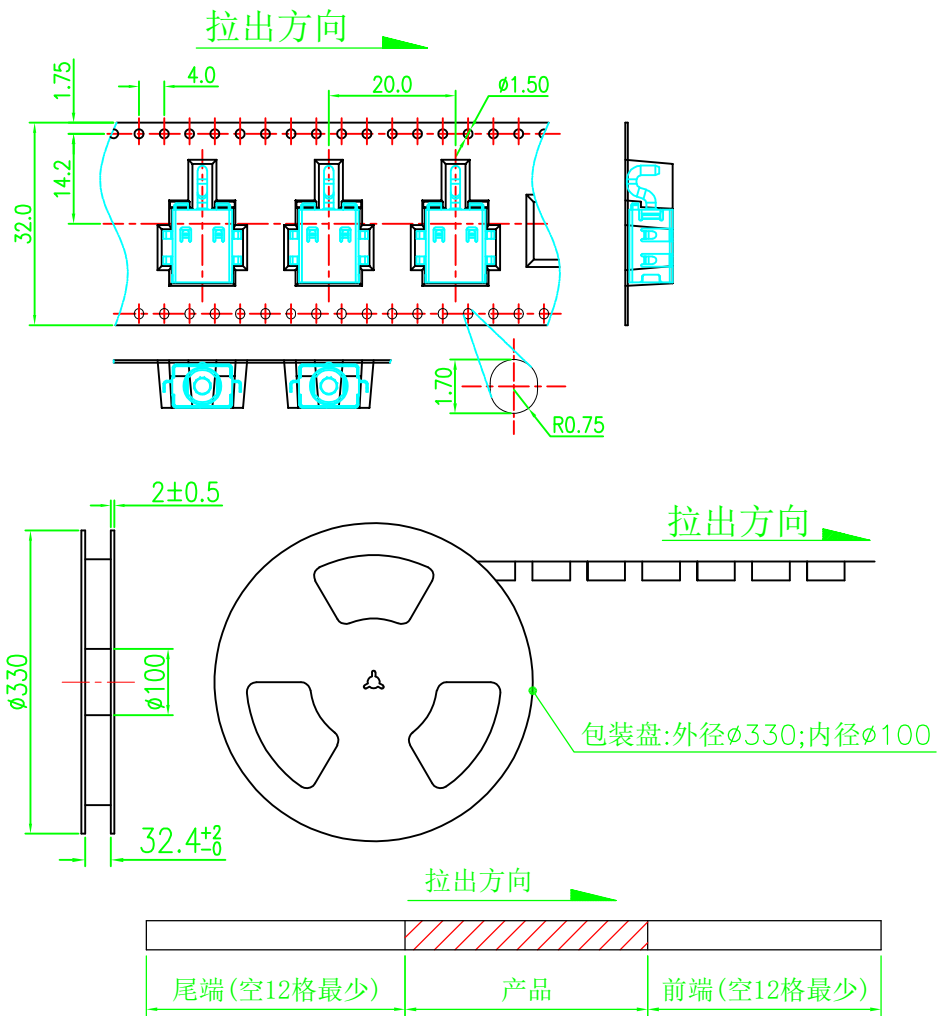

备注:

- 材料规格:
 - 1.1 载带:T=0.50mm
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=335,W=335,H=380
- 包装数量:
400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

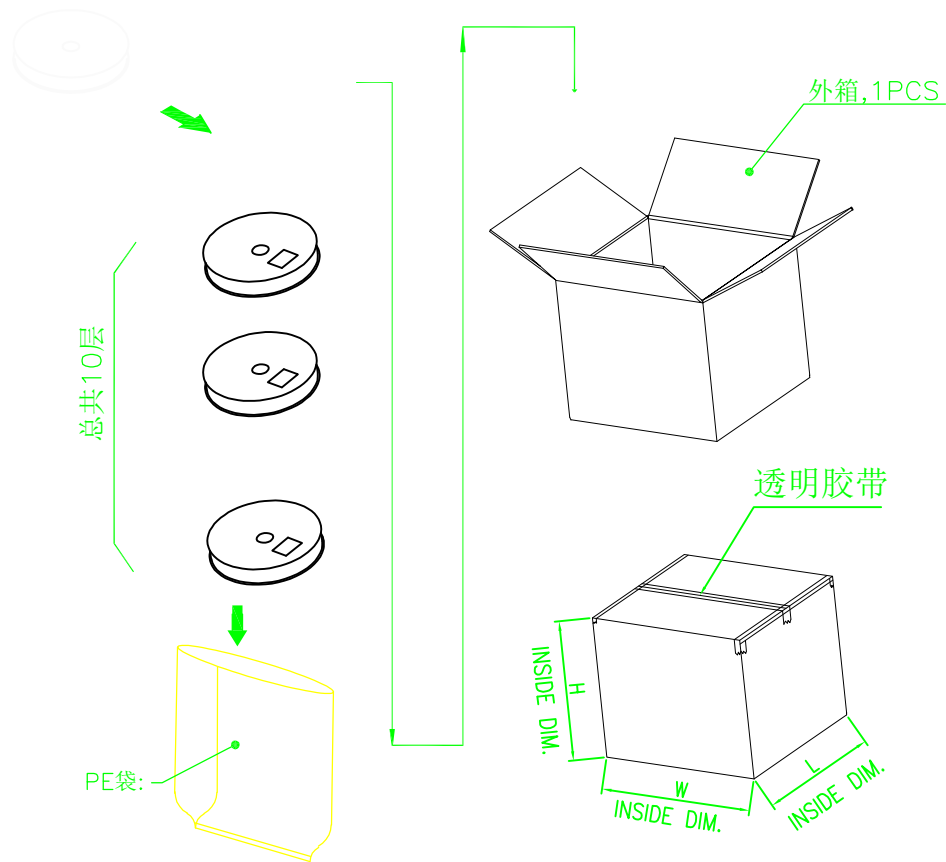

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2022.4.6	Φ5.5 卧式 DC POWER JACK	
X.	±0.50	X.	±2°	CHECK:		PART NO.	
X.X	±0.30	X.X	±1°			XB-DC550200-1159-20000H	
X.XX	±0.20	X.XX	—			SHEET: 1/1	REV.: A1
X.XXX	±0.10	X.XXX	—	APPROVED	Andy	DRAWING NO	
		UNIT: mm			2022.4.6		