
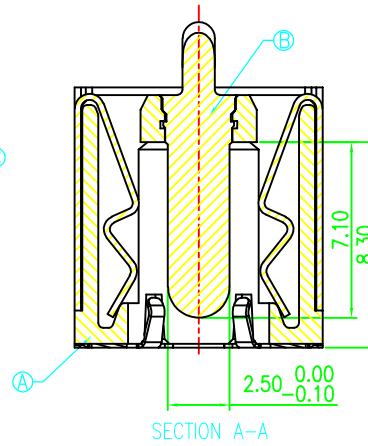





Ø6.00
PICK UP

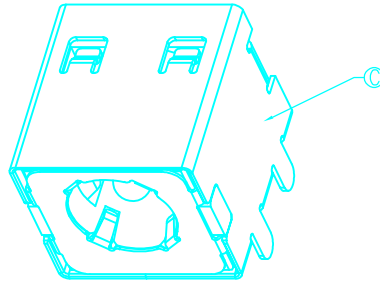


SECTION A-A

SPECIFICATION:

1. RATING: DC 30V 12A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

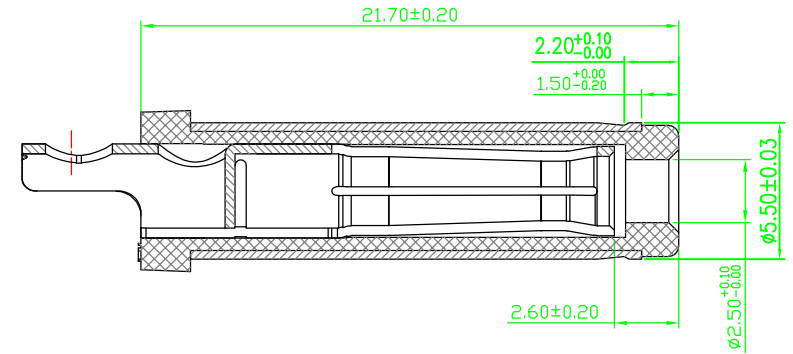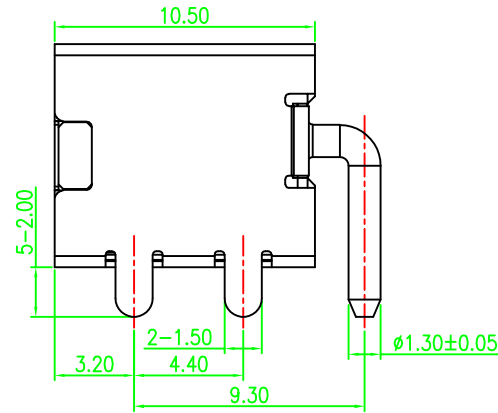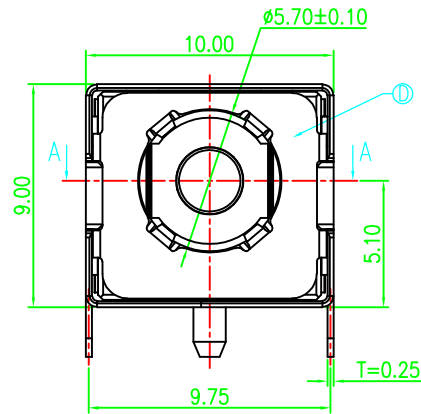


MATING PLUG
DP550250-0188-60000H

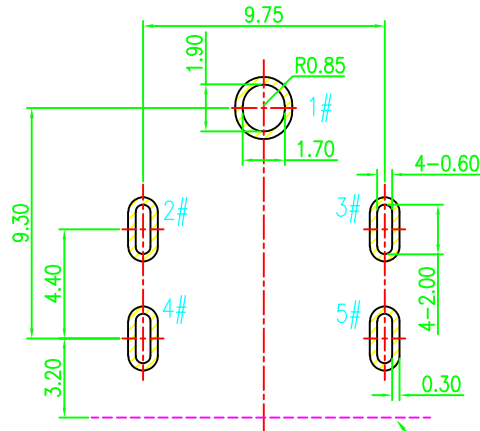

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

PRODUCT EDGE



D	GROUND	SUS 304		1
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ5.5 卧式 DC POWER JACK
DIM	TOL	DIM	TOL		2021.12.22	
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-DC550250-0991-20000H
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	——			
X.XXX	±0.10	X.XXX	——	APPROVED	Andy	SHEET: 1/1 REV.: A1
		UNIT: mm			2021.12.22	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------


拉出方向

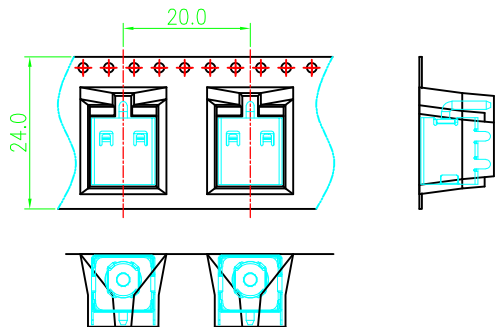


包装盘标签




总共10层

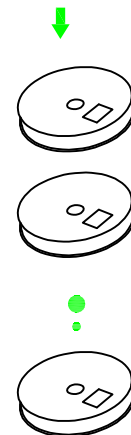


PE袋:



外箱,1PCS

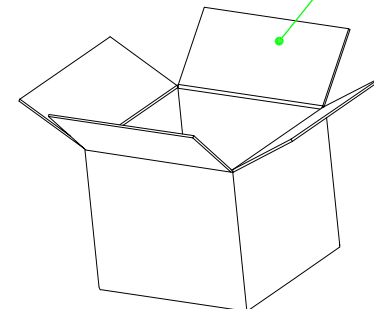

透明胶带

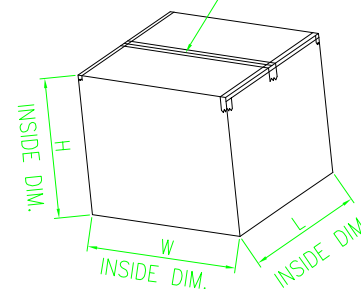


拉出方向

包装盘:外径 $\phi 330$;内径 $\phi 100$

覆盖带 350mm 最少.

拉出方向



备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟 .

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	—	X.	—
X.X	—	X.X	—
X.XX	—	X.XX	—
X.XXX	—	X.XXX	—
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony
CHECK:	
APPROVED	Andy-Liu
	2022.2.15

PART NAME:	
DC POWER JACK	
-包装图	
PART NO.	
XB-DC550250-0991-20000H	
SHEET: 1/1	REV.: A
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------