

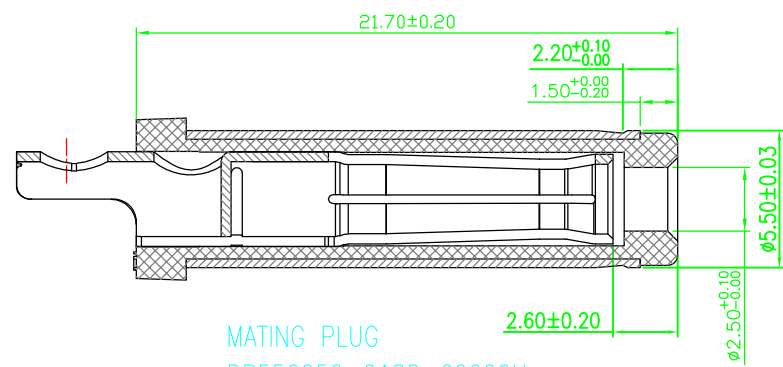
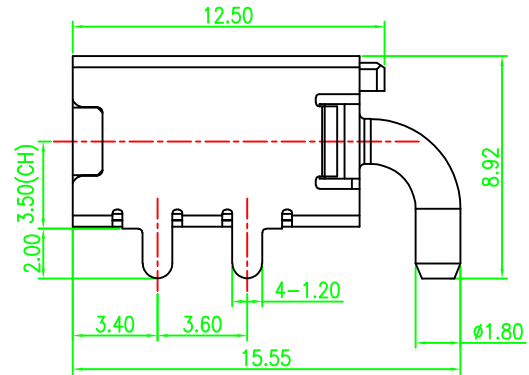
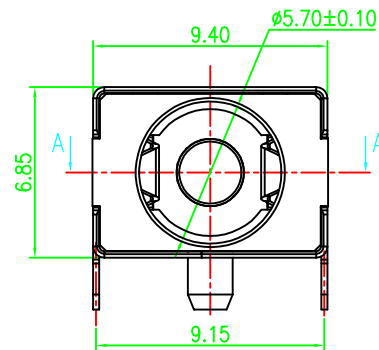
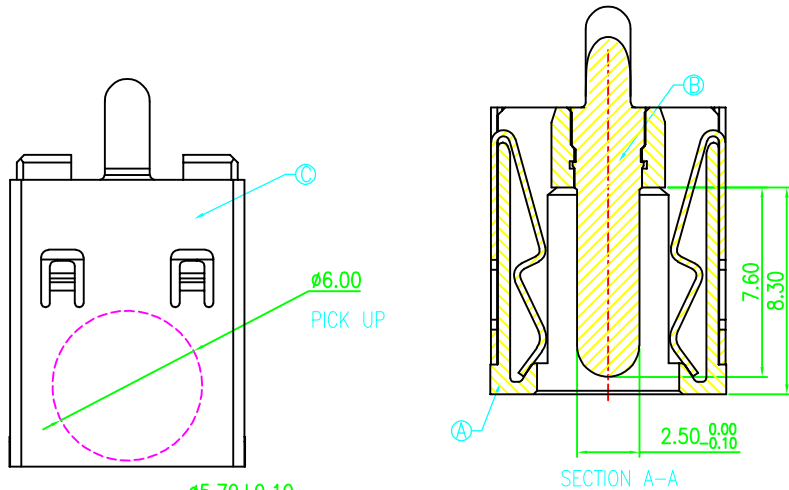


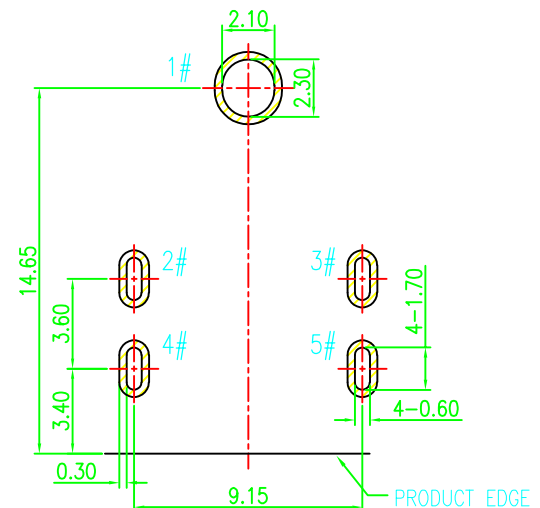


MATING PLUG
DP550250-0188-60000H



RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

SPECIFICATION:

1. RATING: DC 30V 20A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES





C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
DECIMALS:		DESIGN:	Tony	PART NAME:
DIM	TOL	CHECK:		2022.7.28
X.	±0.50	X.		±2"
X.X	±0.30	X.X		±1"
X.XX	±0.20	X.XX		±1'
X.XXX	±0.10	X.XXX		±1'
3RD ANGLE PROJECTION		UNIT:	mm	
APPROVED		Andy	2022.7.28	
PART NO.		XB-DC550250-1045-20000H		
SHEET: 1/1		REV.: A1		
DRAWING NO				

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

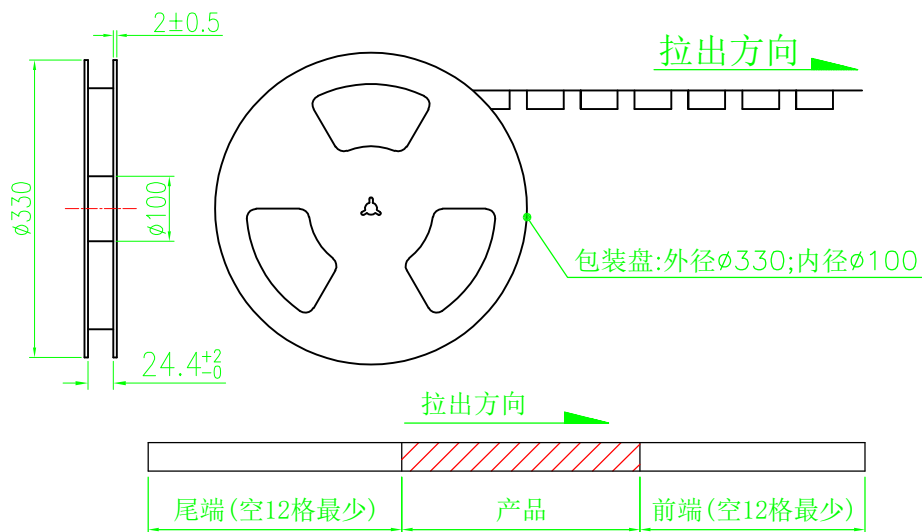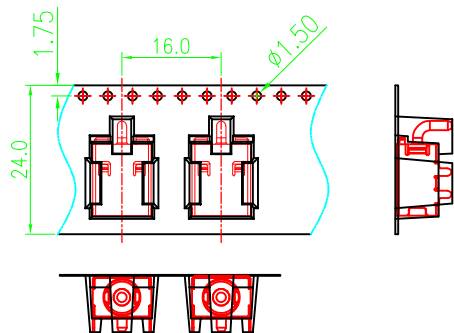

备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:
400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ (10~70gf);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟.

包装盘标签

总共10层

PE袋:

外箱, 1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	///	X.	///
X.X	///	X.X	///
X.XX	///	X.XX	///
X.XXX	///	X.XXX	///
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony
CHECK:	
APPROVED	Andy-Liu
	2022.5.20

PART NAME:	
DC POWER JACK	
-包装图	
PART NO.	
XB-DC550250-1195-20000H	
SHEET: 1/1	REV.: A
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------