

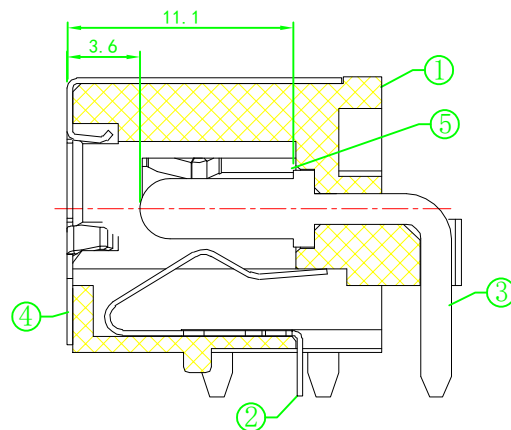
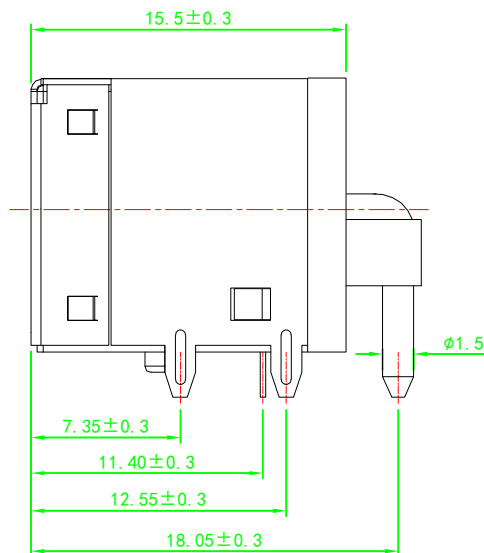
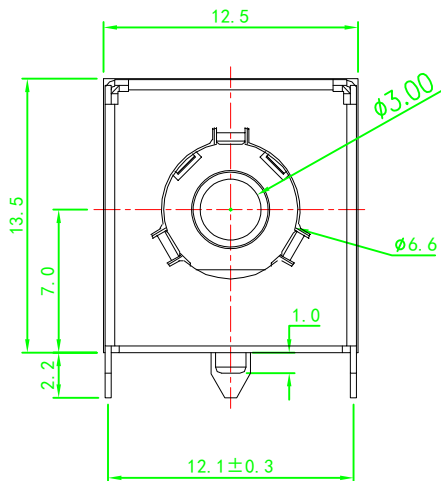


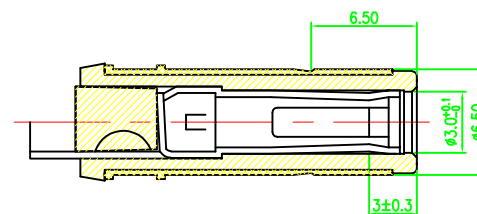


- SPECIFICATION
1. Rating : DC 20V 10A;
 2. Contact resistance: $\leq 0.03 \Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 5-30N;
 6. life test: 5,000 cycles.



MATE PLUG
P/N.: DP650300-0039-60000H

SCHEMATIC




5	SPRING PIECE	1	C5210	Ni-Plating
4	COAT	1	C2680	Ni-Plating
3	PIN	1	C2680	Ni-Plating
2	SPRING PIECE	2	C5210	Sn-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES



XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2022.12.5	Φ6.50 H13.5 卧式	
X.	±0.50	X.	±2°	CHECK:		DC POWER JACK	
X.X	±0.30	X.X	±1°				
X.XX	±0.20	X.XX	—	APPROVED	Andy	PART NO.	
X.XXX	±0.10	X.XXX	—		2022.12.5	XB-DC650300-0596-20000H	
		UNIT: mm		SHEET: 1/1 REV.: A1			
3RD ANGLE PROJECTION				DRAWING NO			







REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------



单重:4.5g

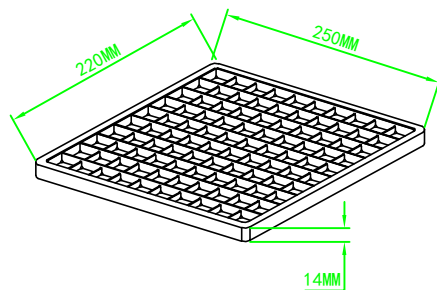

100PCS/盘

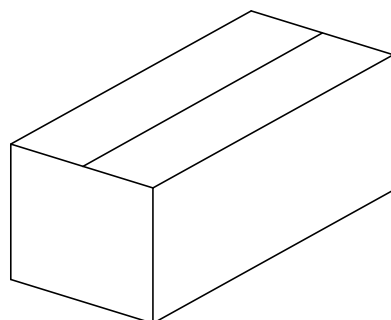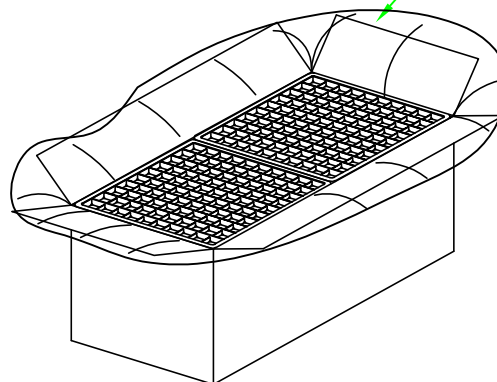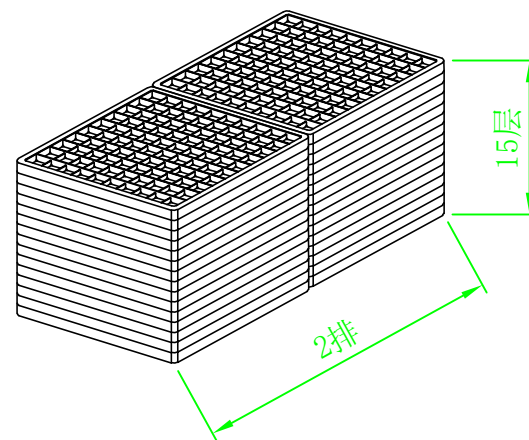

纸箱尺寸: 36*31.5*42.0 cm

数量: 4000 PCS

净重: 18.0 KG

毛重: 21.0 KG

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION

DESIGN:	Tony
	2022.12.5
CHECK:	
APPROVED	Andy
	2022.12.5

PART NAME:	
Φ6.50 H13.5卧式 DC POWER JACK-包装图	
PART NO.	
XB-DC650300-0596-20000H	
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

8

7

6

5

4

3

2

1