

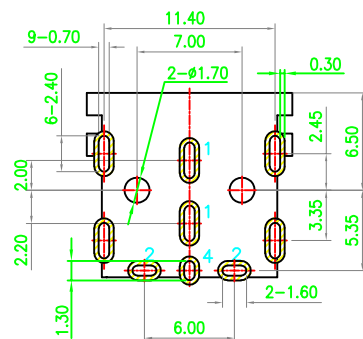
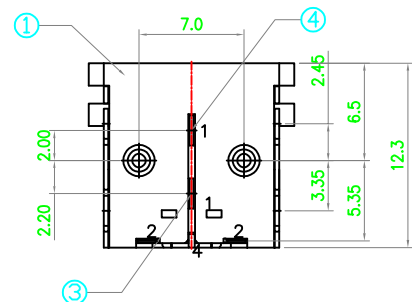

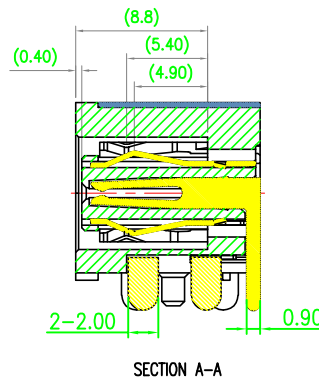

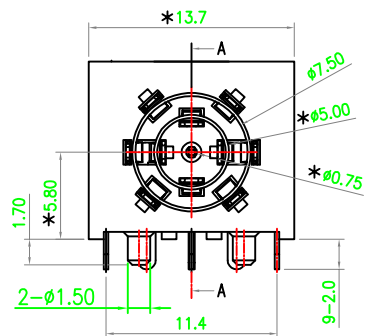


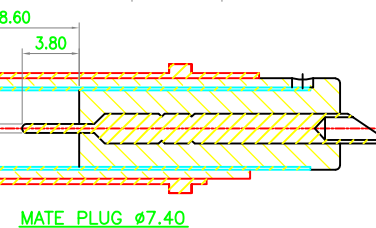

Recommend of PC Board Holes
Tolerance : ± 0.05 (Top view)

DATE CODE



SCHEMATIC

- ✓ —○2 (SPRING +)
—○4 (SIGNAL S)
—○1 (SPRING -)

Notes:

1. Electrical Characteristics:

- 1-1. Rating : DC 20 V 15A;
1-2. Contact Resistance: 30m Ω Max.(Initial), Between plug and contact 100m Ω Max;
(Final) After Life test: ≤ 60 m Ω ;

1-3. Dielectric Withstanding Voltage: 500V AC for One Minute;

1-4. Insulation Resistance: 100M Ω Min. Measured By 500 VDC;

2. Mechanical Characteristics:

2-1. Plug Insertion Force 1.5~3.0Kg (initial)

2-2. Plug Extraction Force: 1.5~3.0Kg (initial)

3. Durability Test: 5,000 Cycles min;

4. Operating temperature: -25°C ~ +70°C;

5. Soldering Heat Resistance Wave soldering 230°C (Support) or IR Reflow Soldering 260°C;

6. Plug Interface Dimensions Conform To EIAJ RC-5321 Spec;










7. Packaging: Tape Reel;

⑥ DETECT PIN	C2680	Au/Tin	1
⑤ SPRING PIN	C7025	Au	1
④ SPRING PIN 2	C7025	Au	1
③ SPRING PIN 1	C7025	Au	1
② SHELL	C2680	Ni	1
① HOUSING	PA10T		1
ITEM	DESCRIPTIONs	MATERIAL	FINISH Q'TY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ7.4 卧式 H=11.85 DC POWER JACK
DIM	TOL	DIM	TOL	CHECK:	2022.6.28	
x.	±0.50	x.	±2°		PART NO. XB-DC740060-0667-20000H	
x.x	±0.30	x.x	±1°			SHEET: 1/1 REV.: A2
x.xx	±0.20	x.xx	——	DRAWING NO		
x.xxx	±0.10	x.xxx	——		APPROVED	Andy
		UNIT: mm		2022.6.28		

A2	22042801	更新LAYOUT尺寸	Tony	2022.4.28
REV.	ECN NO.	DESCRIPTION	DESIGN	DATE

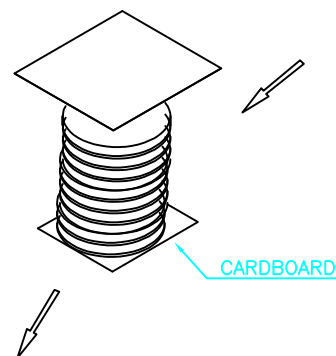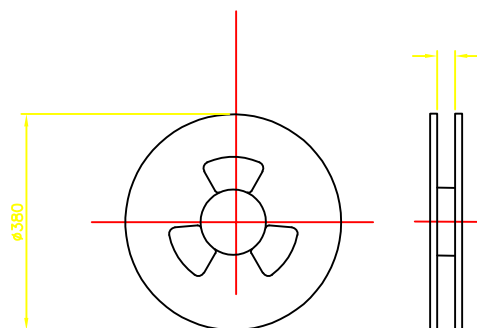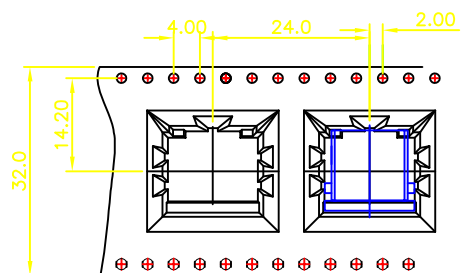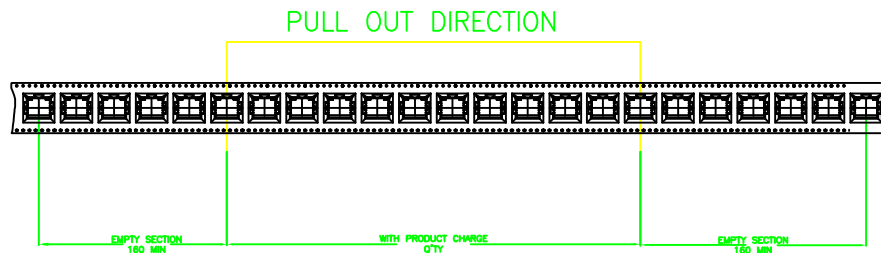


NOTE :

1.MATERIAL :
REEL: PS
CARRIER: PS
COVER TAPE: PE

2.DIMENSION :
REEL SIZE:
DIA=380mm, W=32mm
CARTON:
L=385mm, W=385mm, H=385mm

3.QUANTITY:
250 PCS/REEL
10 REELS/ CARTON: 2500PCS

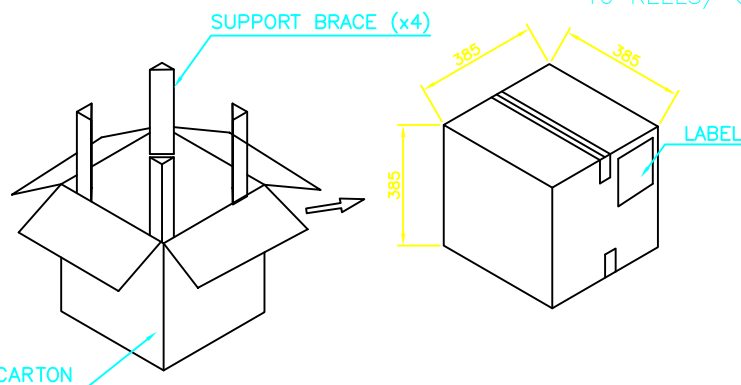

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	



UNIT:
mm

DESIGN:	Tony
CHECK:	
APPROVED:	Andy

PART NAME:	
Φ7.4卧式 H=11.85 DC POWER JACK-包装图	
PART NO.	
XB-DC740060-0667-20000H	
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------