
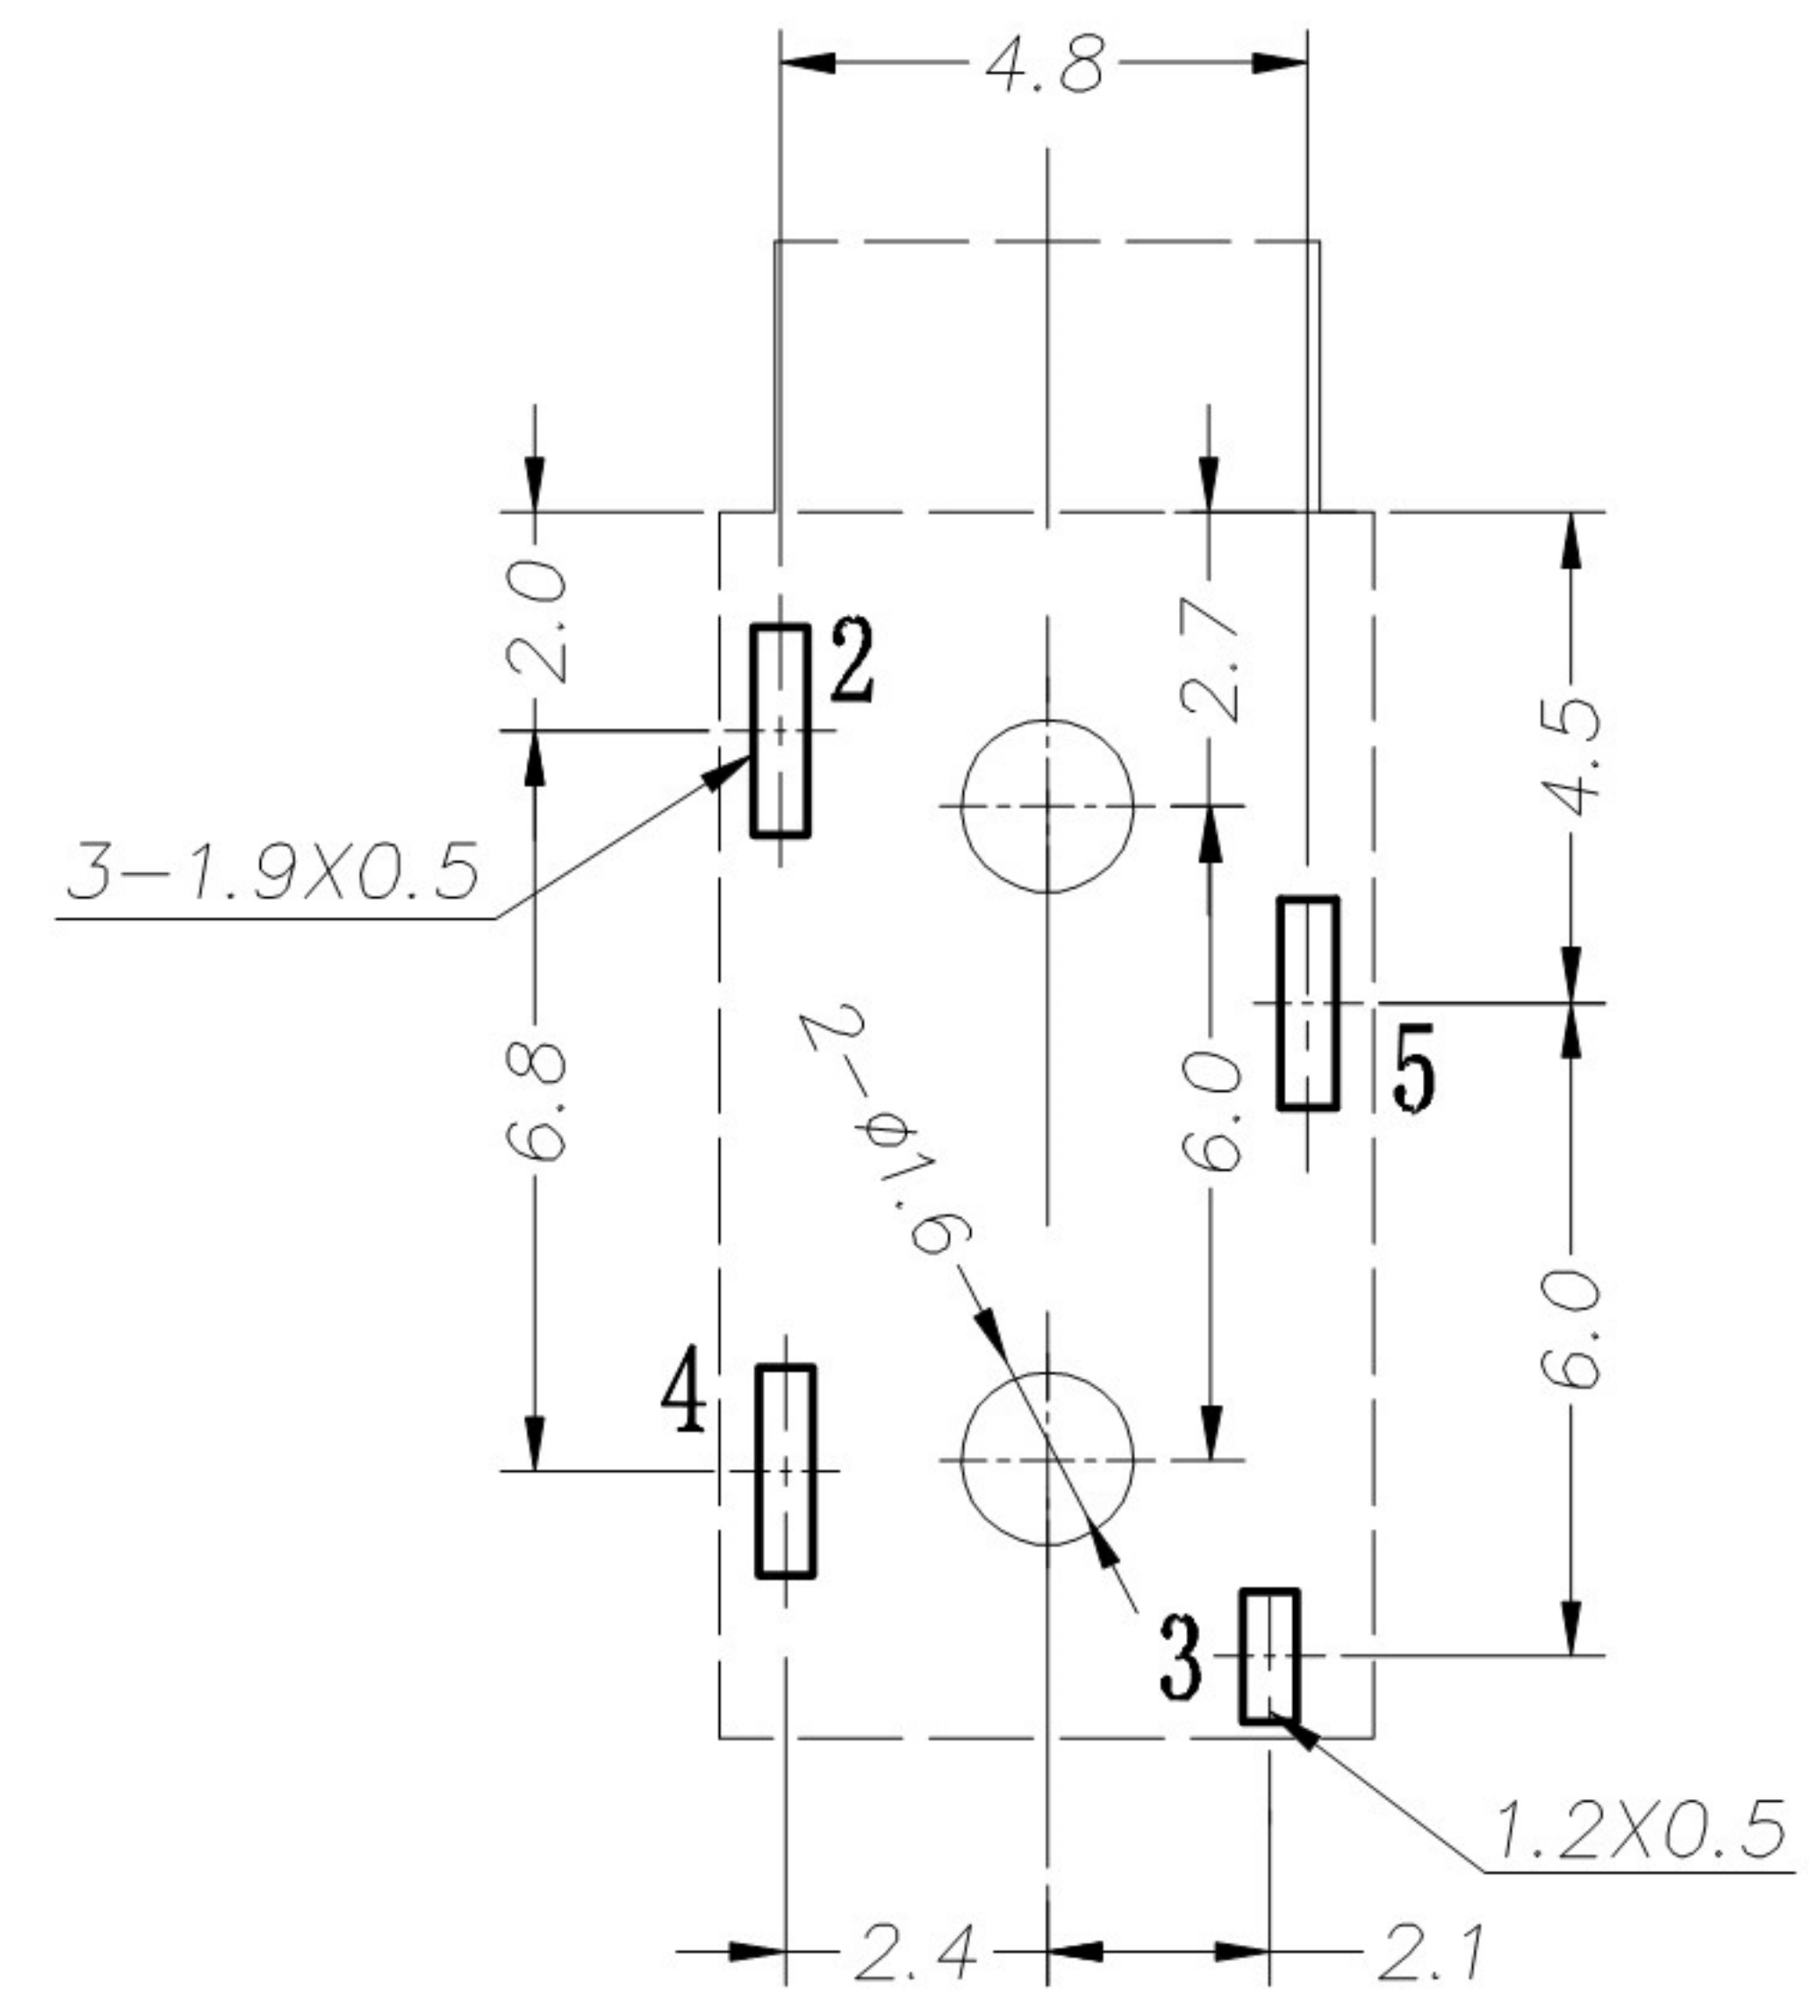
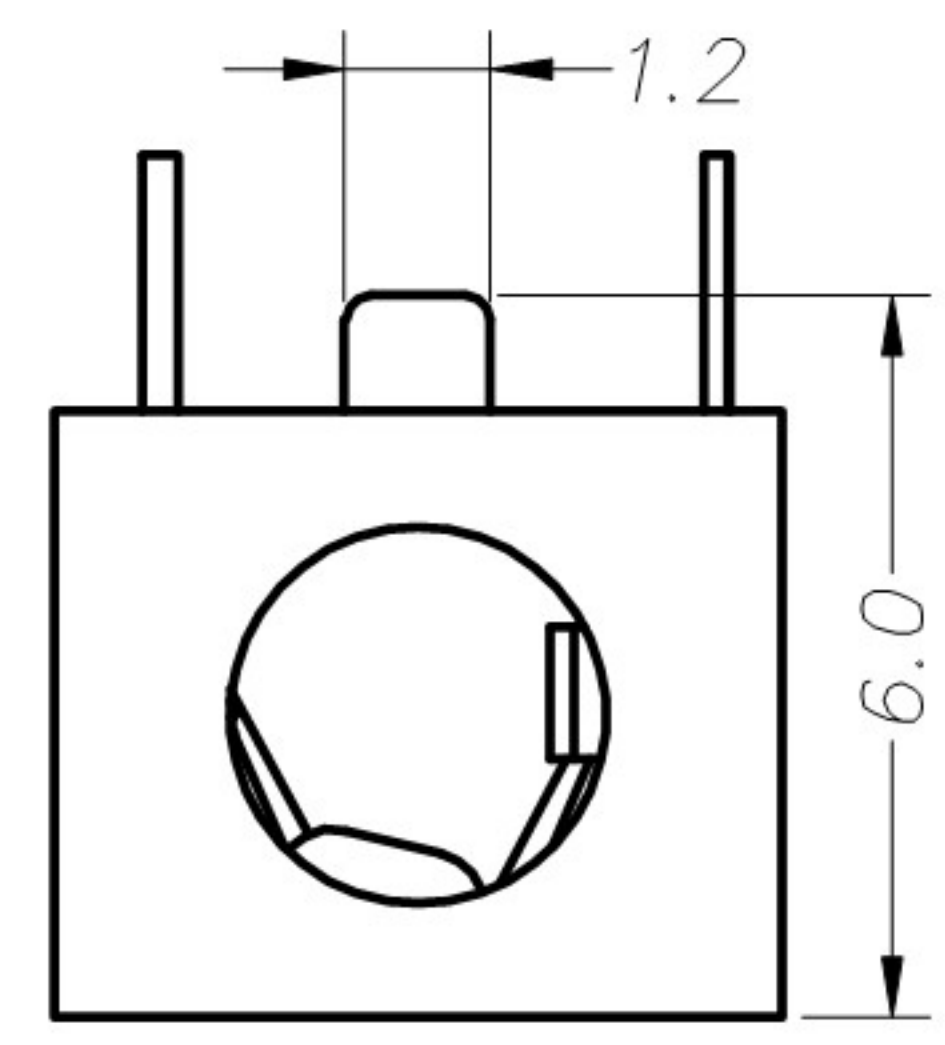
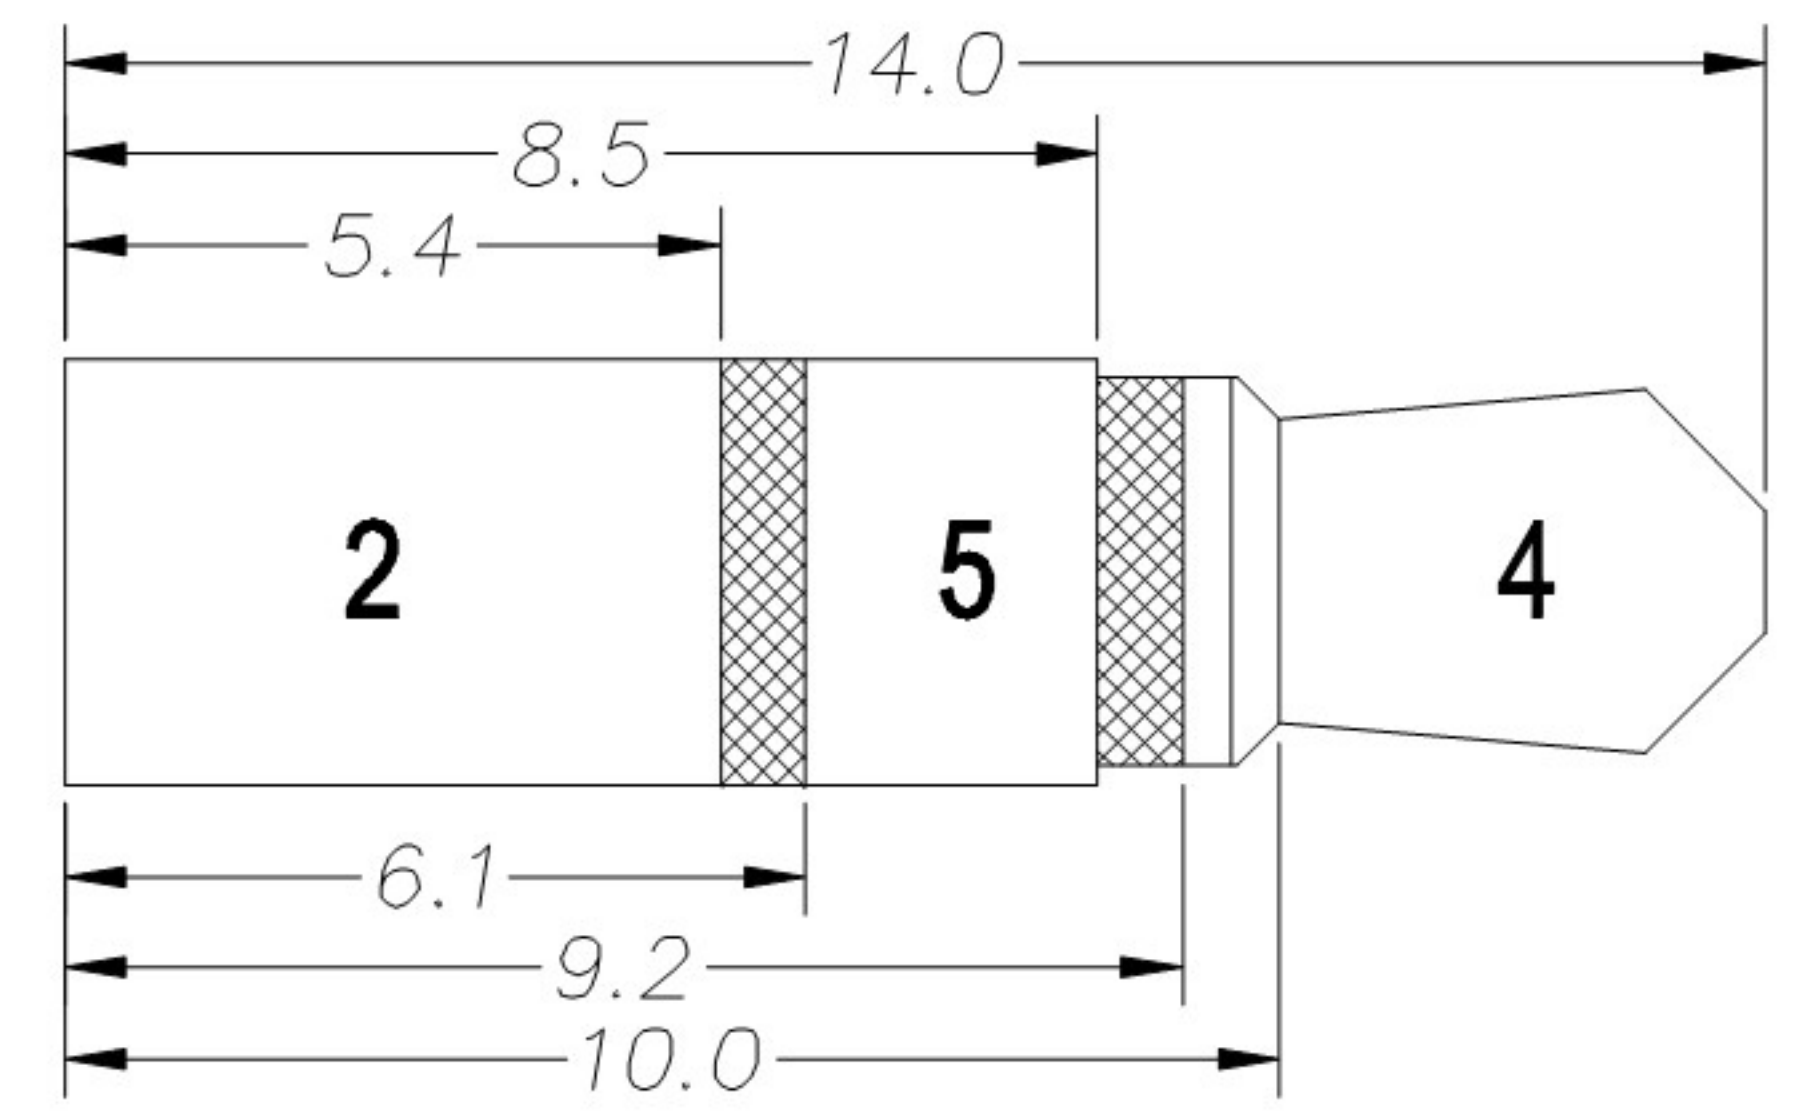






由Autodesk教育版产品制作

由Autodesk教育版产品制作

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

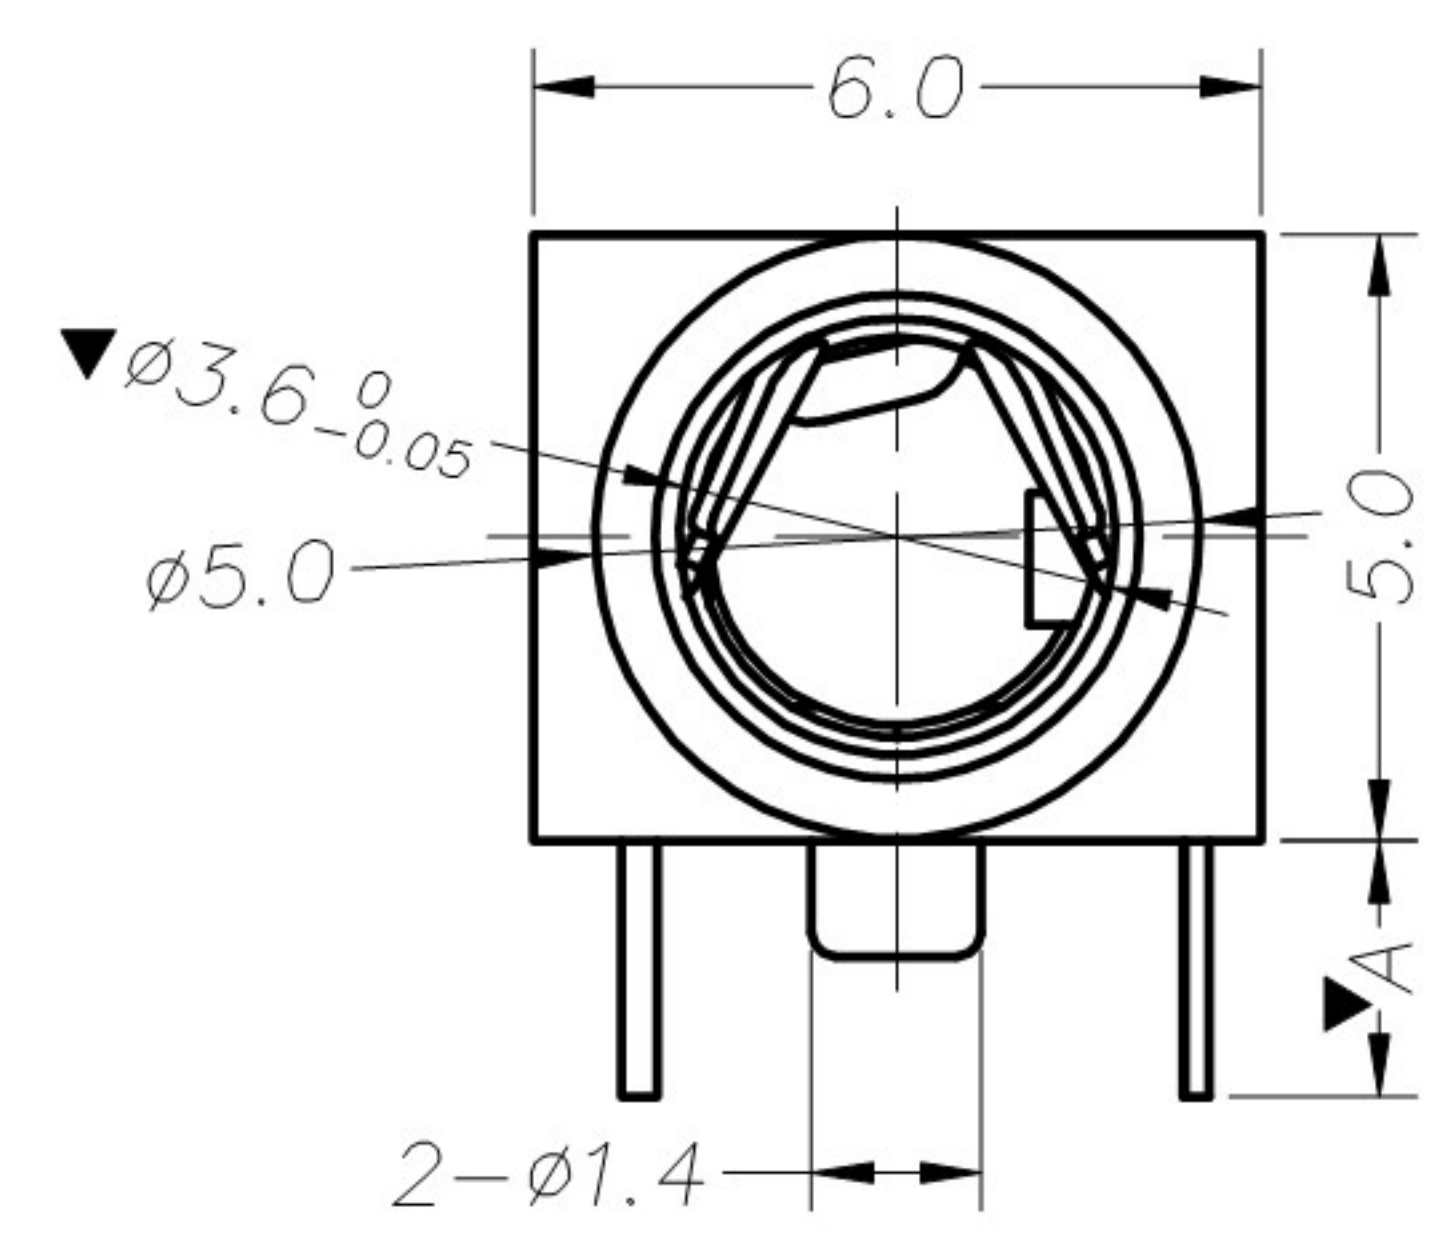

P.C.B LAYOUT TOP VIEW

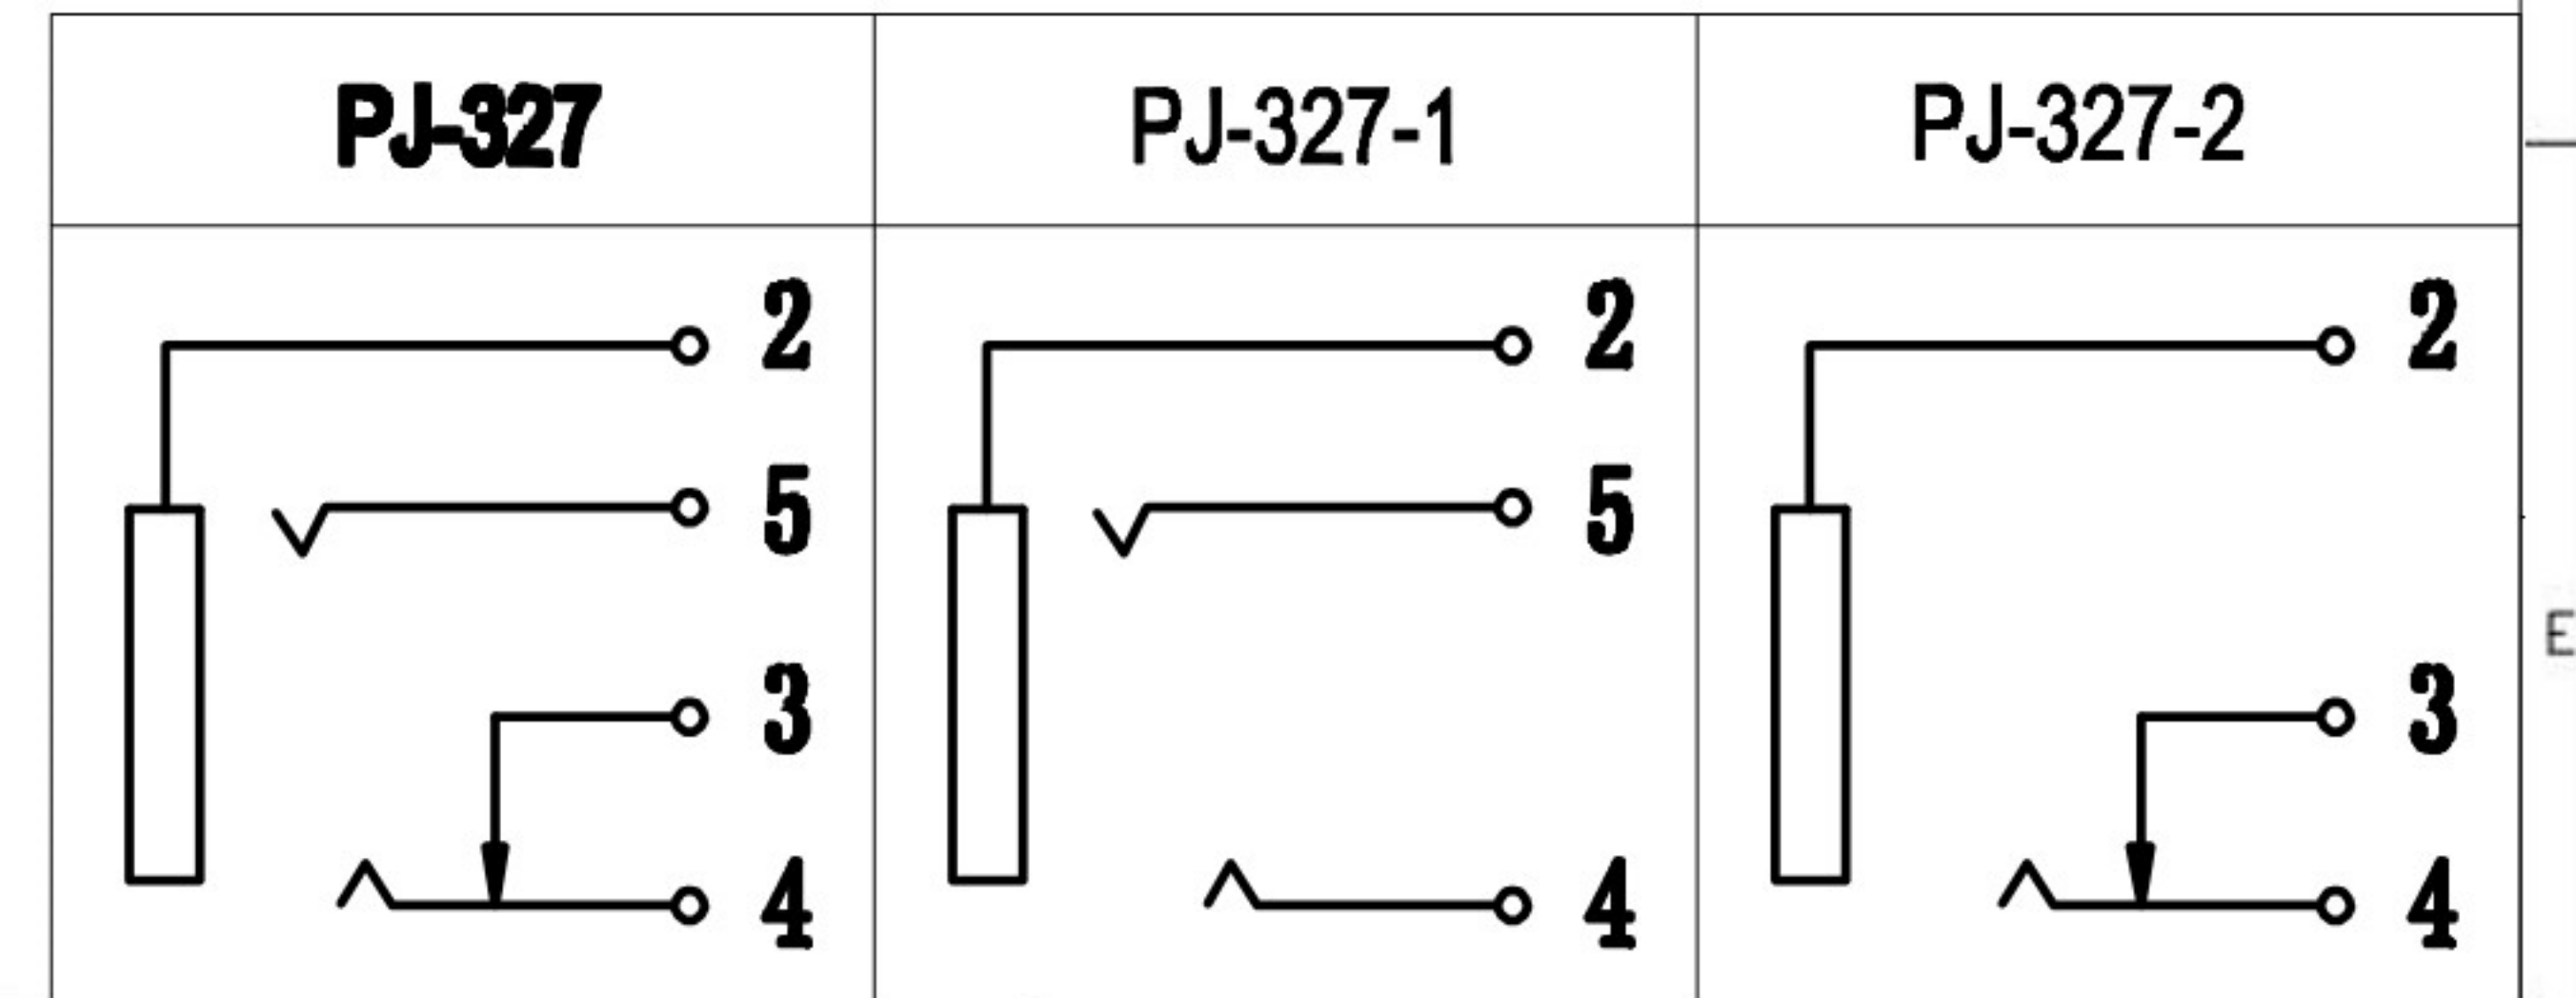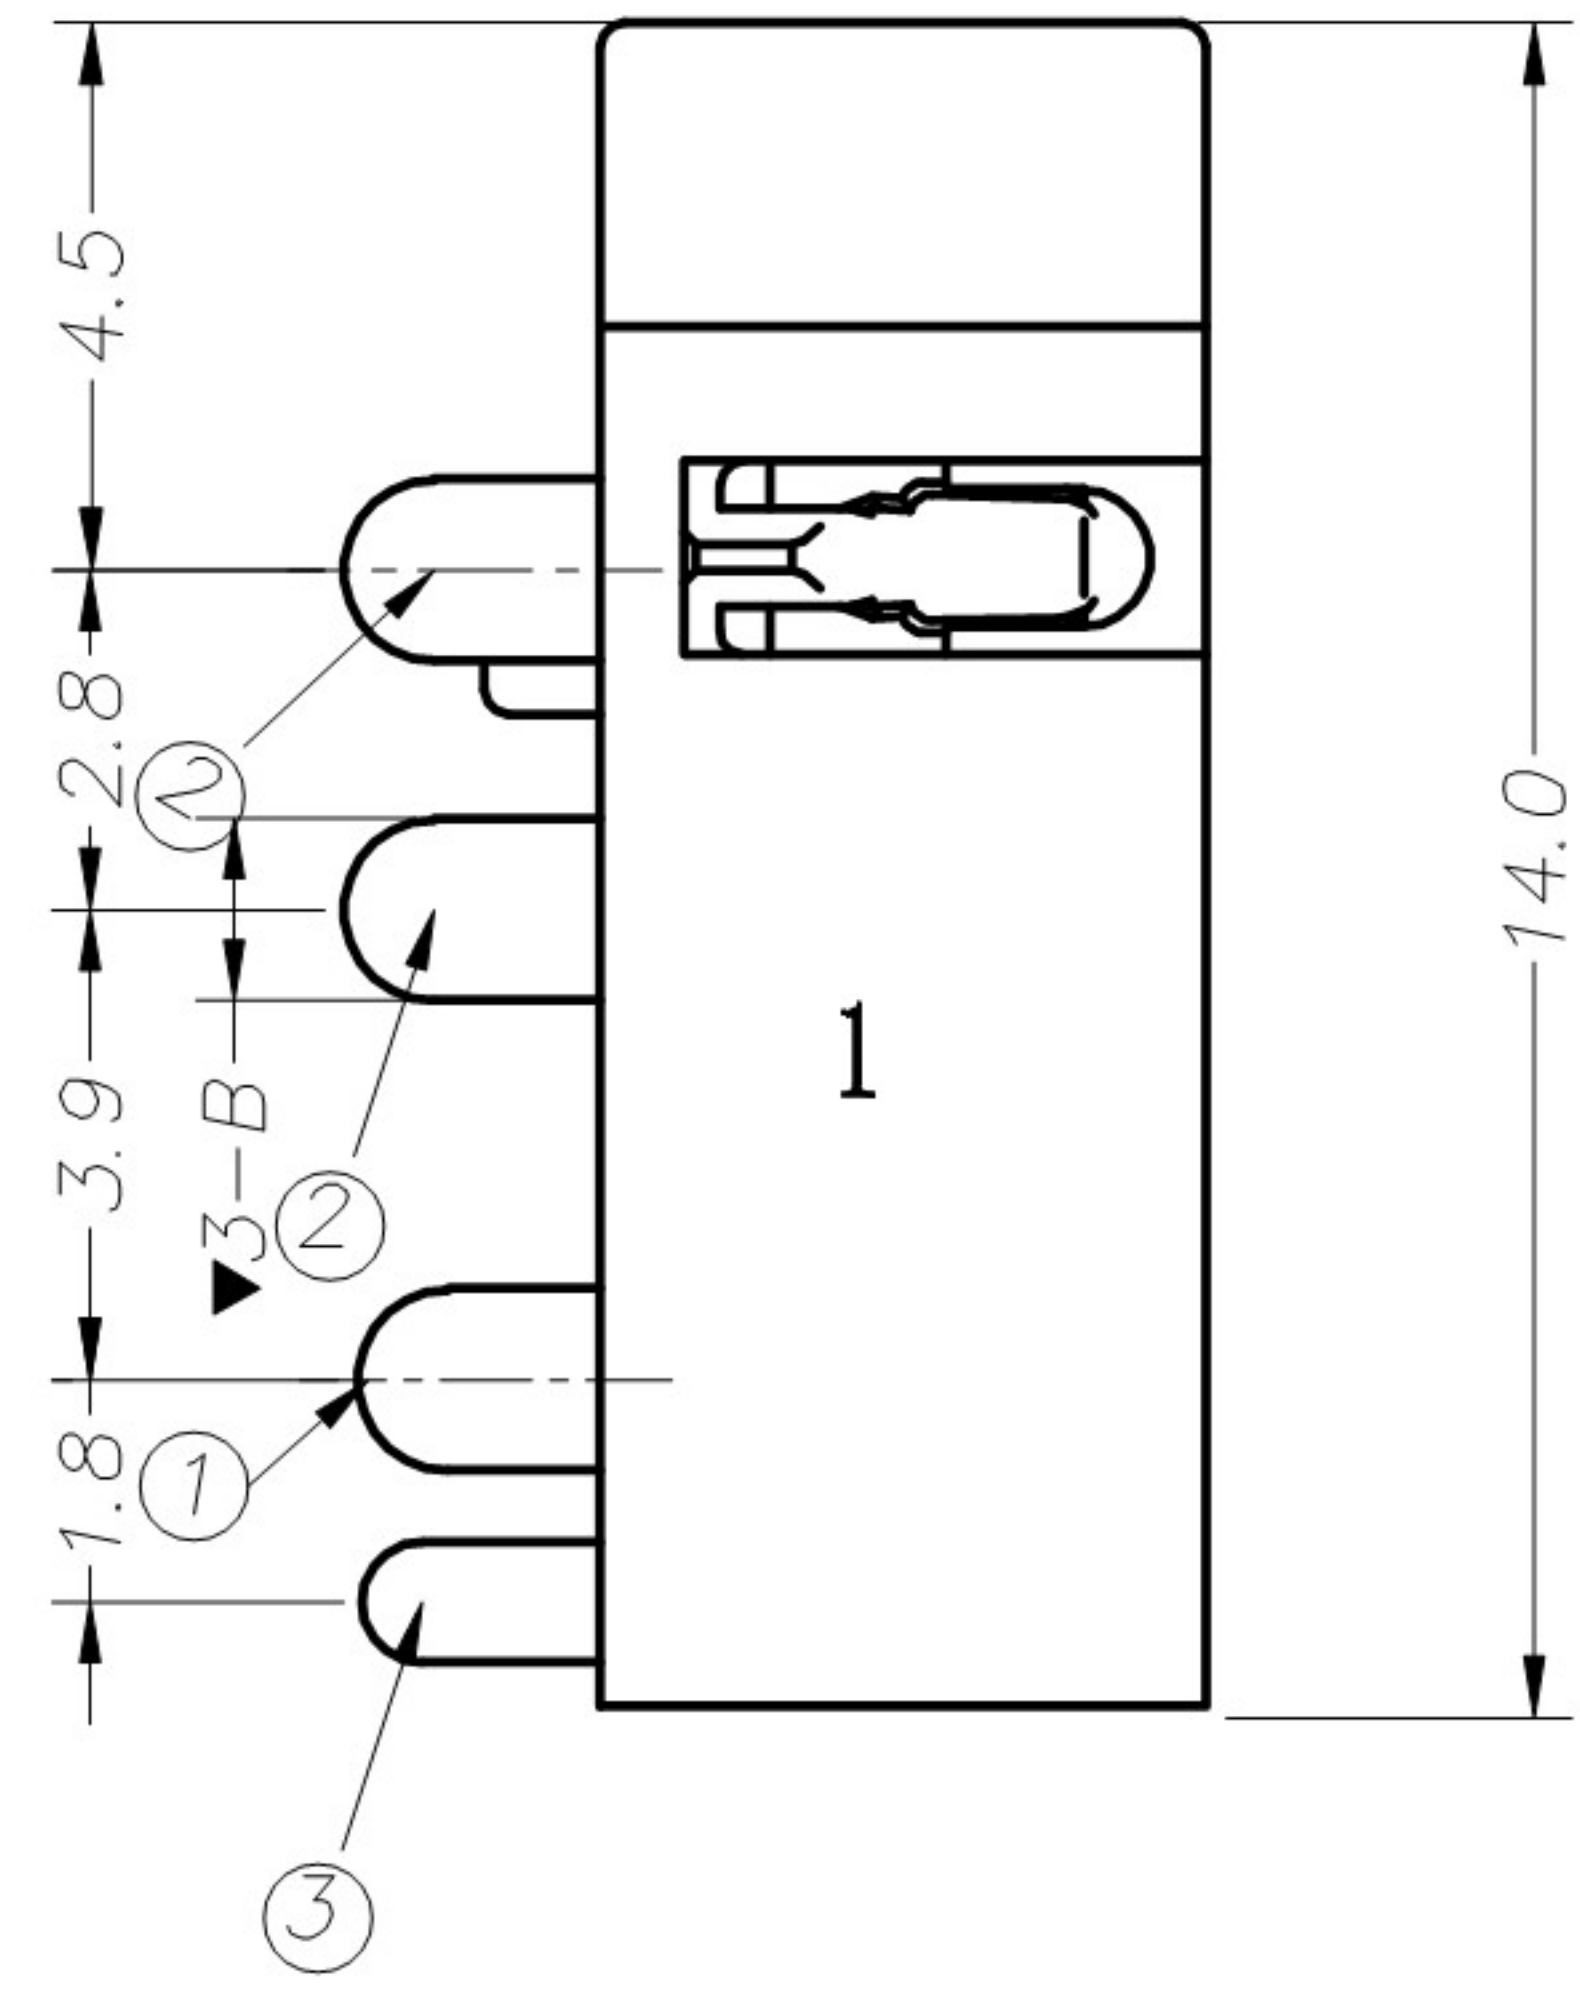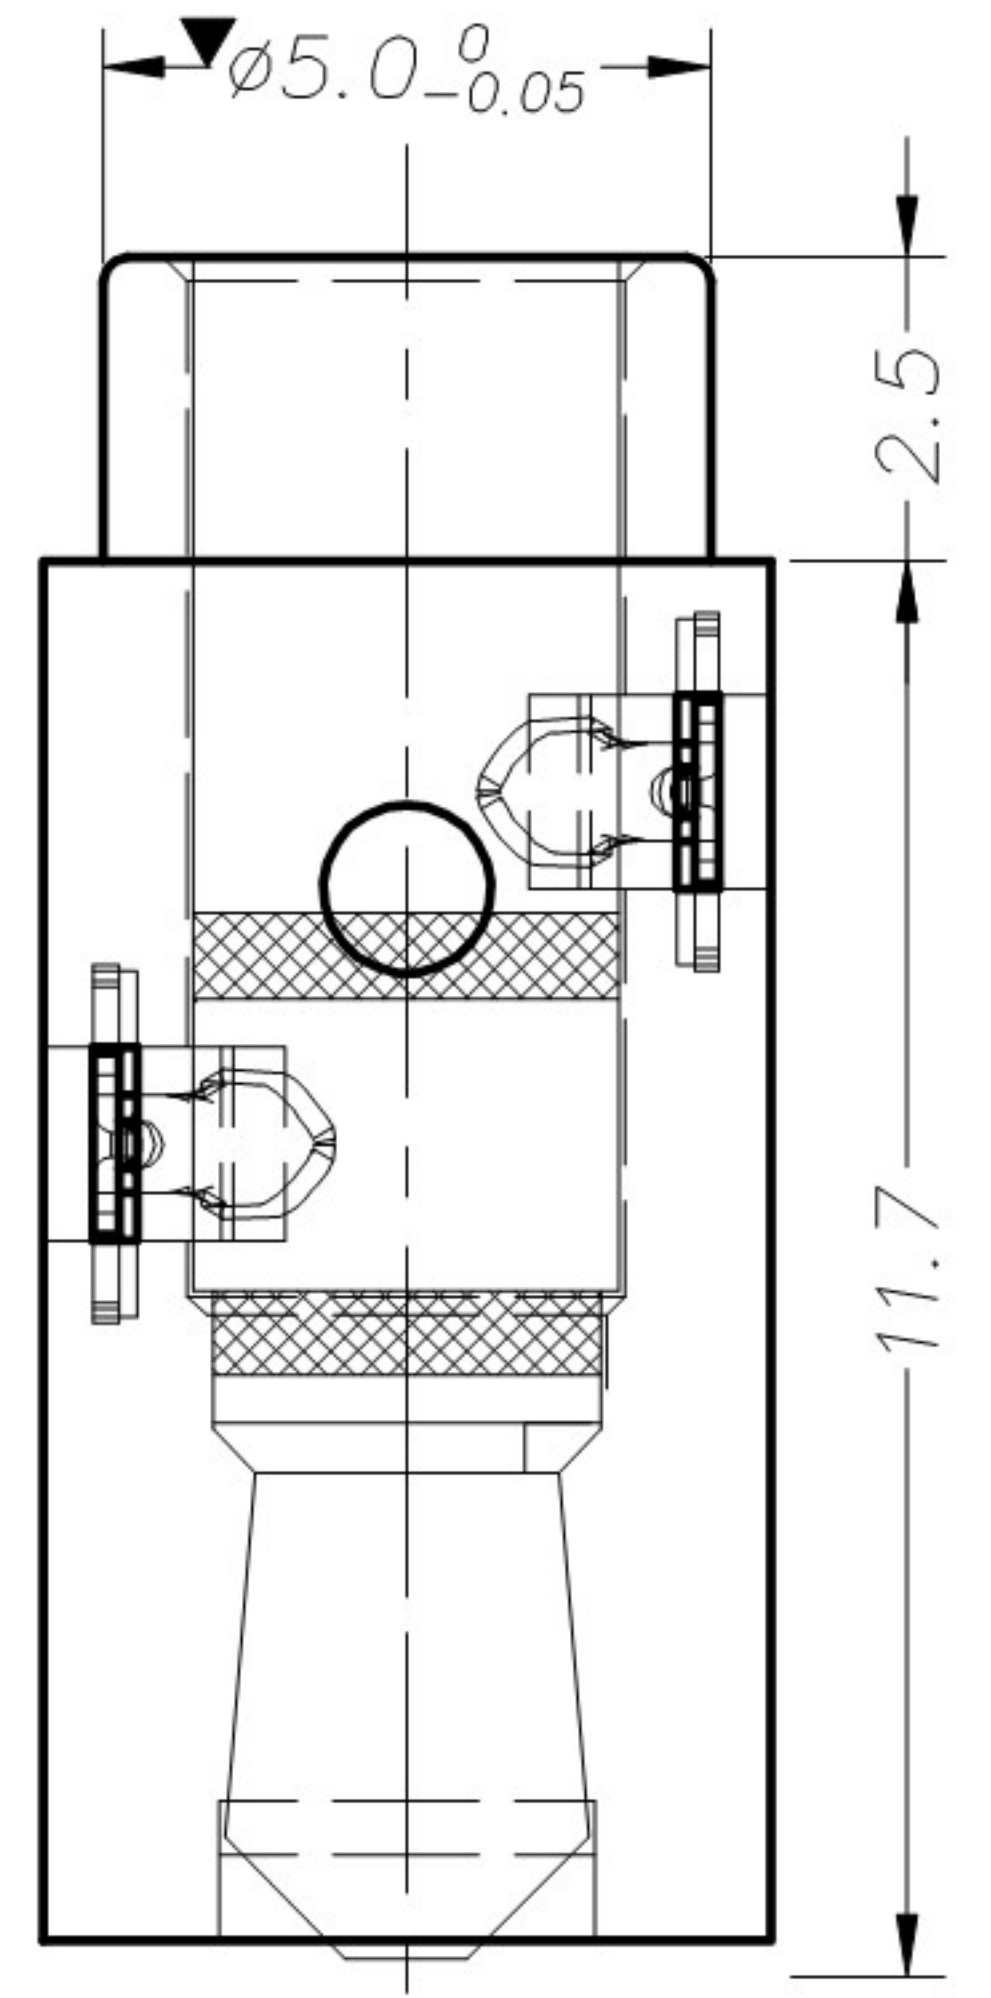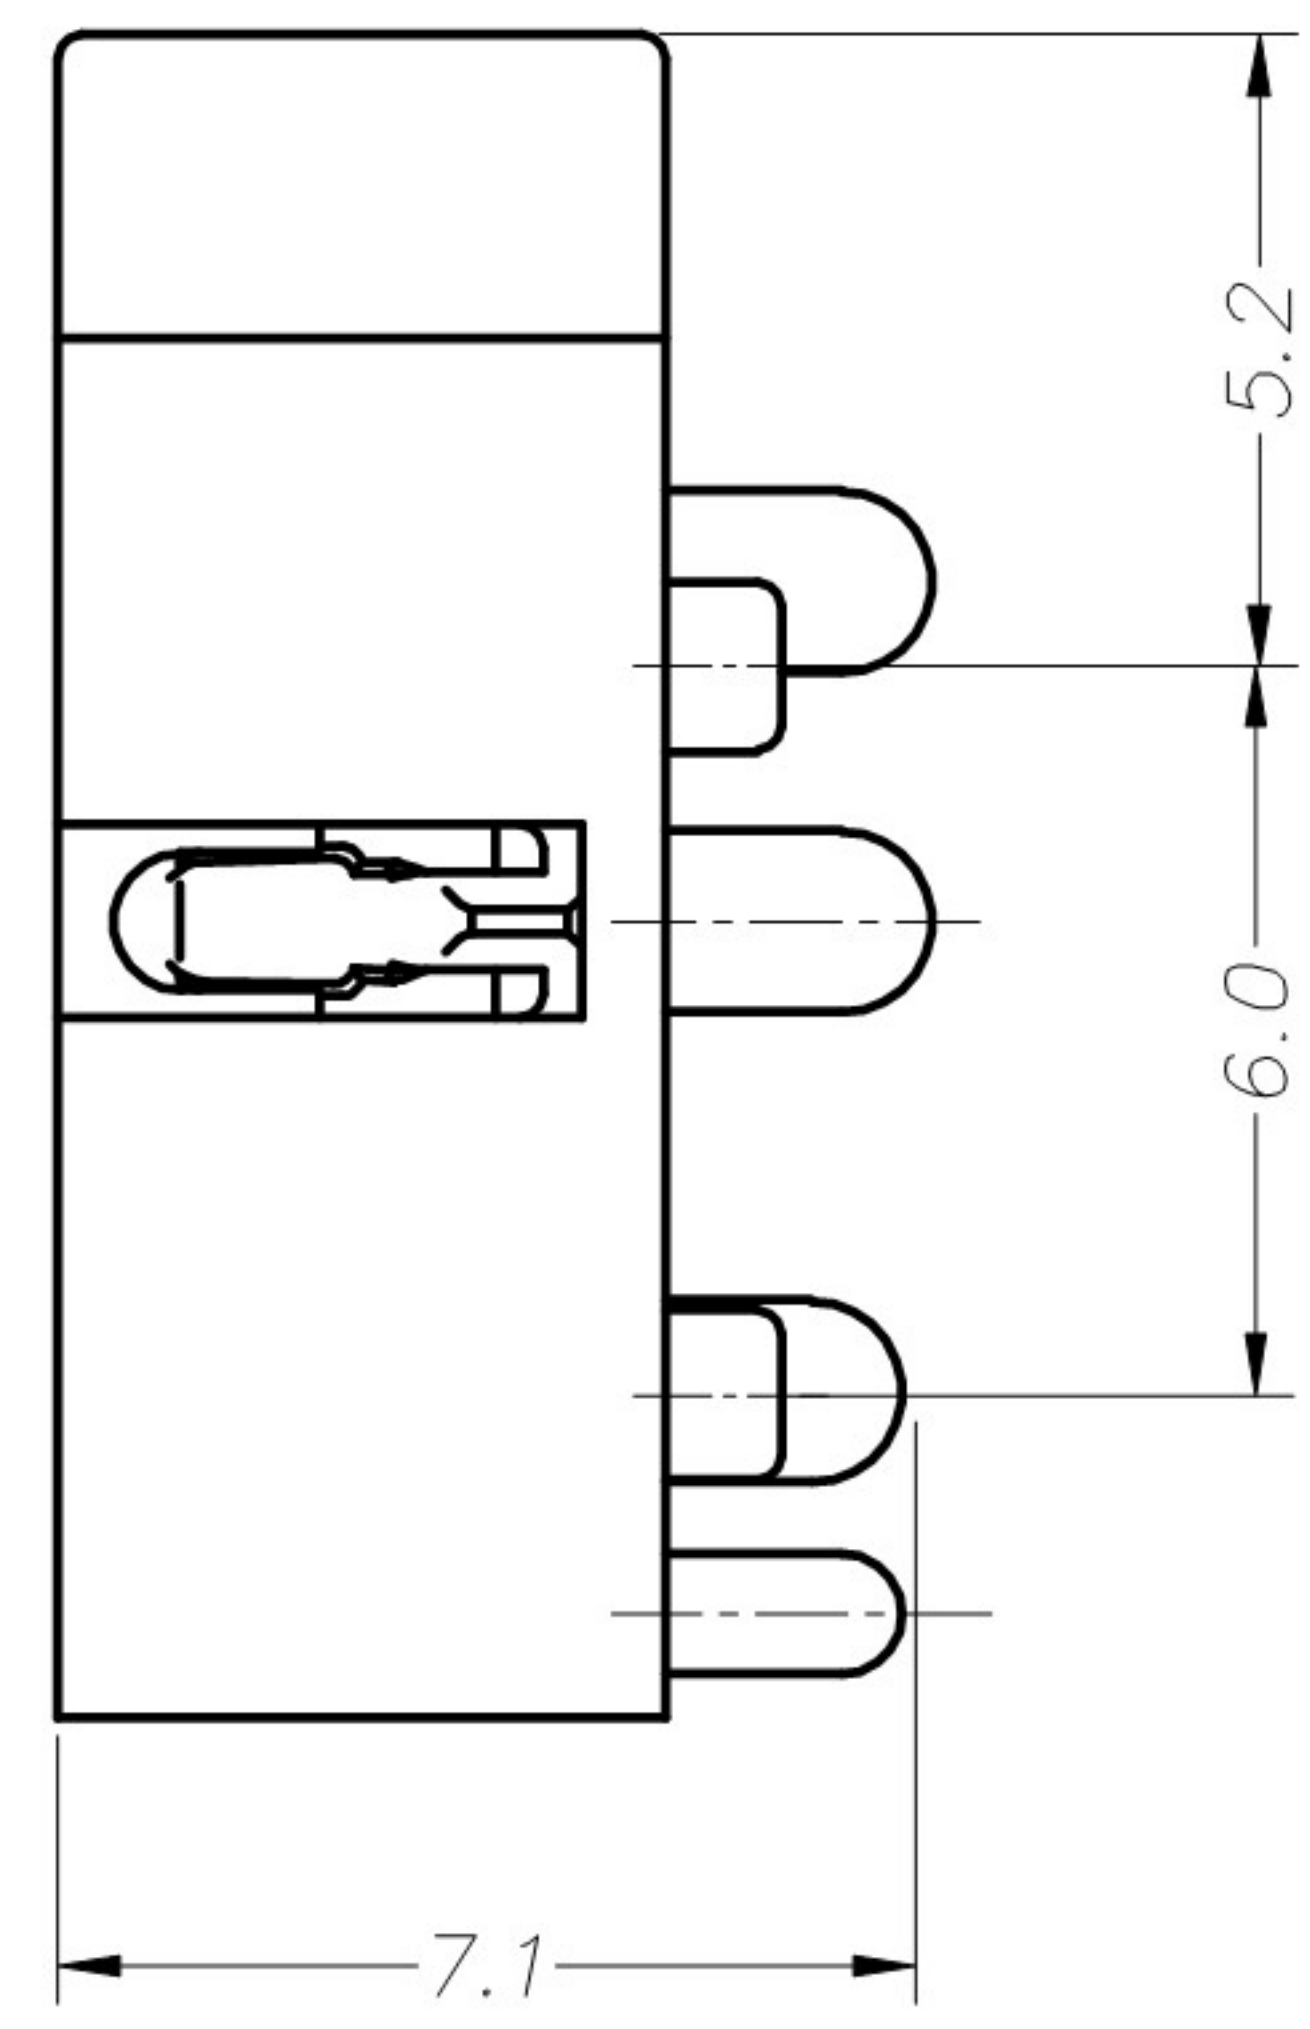

							主要技术性能		UNLESS OTHERWISE SPECIFIED TOLERANCES		XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.								
							额定电负荷	DC 30V\0.5A			DECIMALS:		ANGLES:		DWG NO.	Q/XM-CP-RD-XXXX	PART NAME:		
							接触电阻	≤0.03Ω							DESIGN:	Kai	PHONE JACK		
							绝缘电阻	≥100MΩ							2018.06.14		PART NO.		
							耐 压	AC500V(50Hz)/min			DIM	TOL	DIM	TOL	CHECK:	Lucky	XB-PJ-327-4P		
							插 拔 力	3-20N			X.	±0.35	X.	±2°	2018.06.14				
							使用温度范围	-30-70℃			X.X	±0.30	X.X	±1°	2018.06.14				
							使用寿命	5000次			X.XX	±0.20	X.XX	—	2018.06.14				
											X.XXX	±0.10	X.XXX	—	2018.06.14				
序号		产品编号		产品名称		数量	材 料	规 格	电 镀					APPROVED	Lucky	REV. A	UNIT: mm	SHEET: 1/1	
0		1		2		3		4		5		6		7		8		9	