

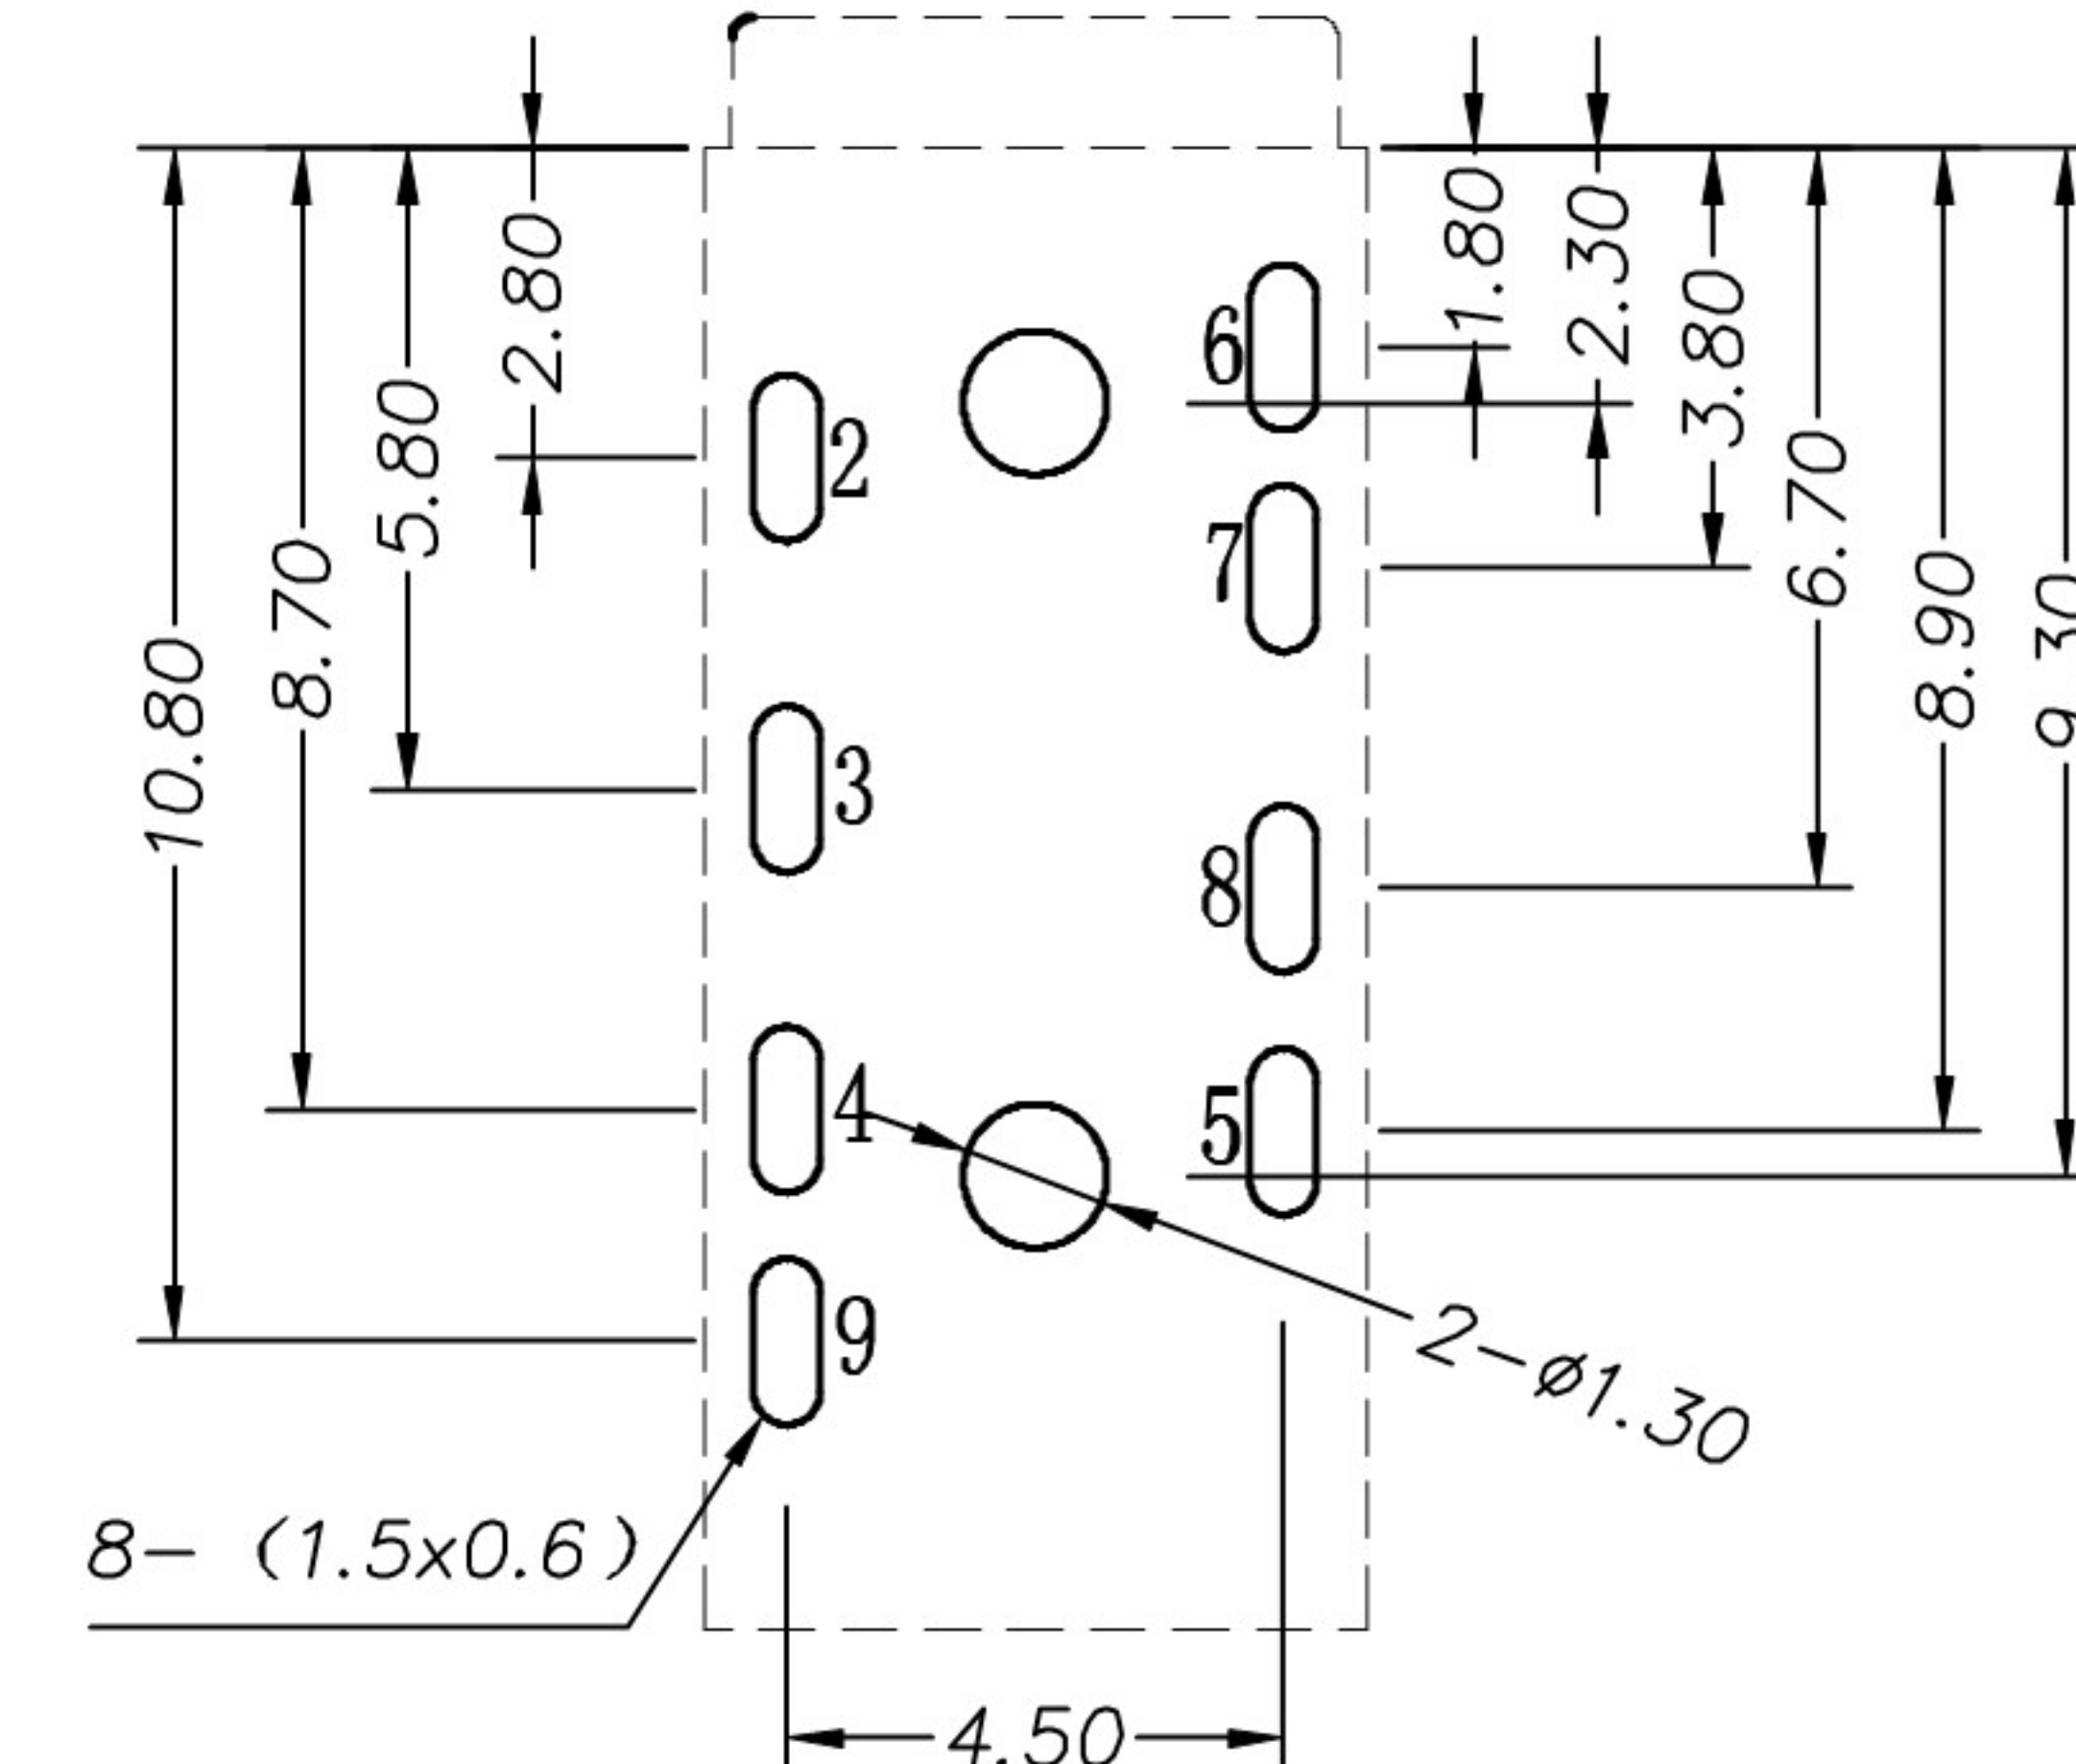
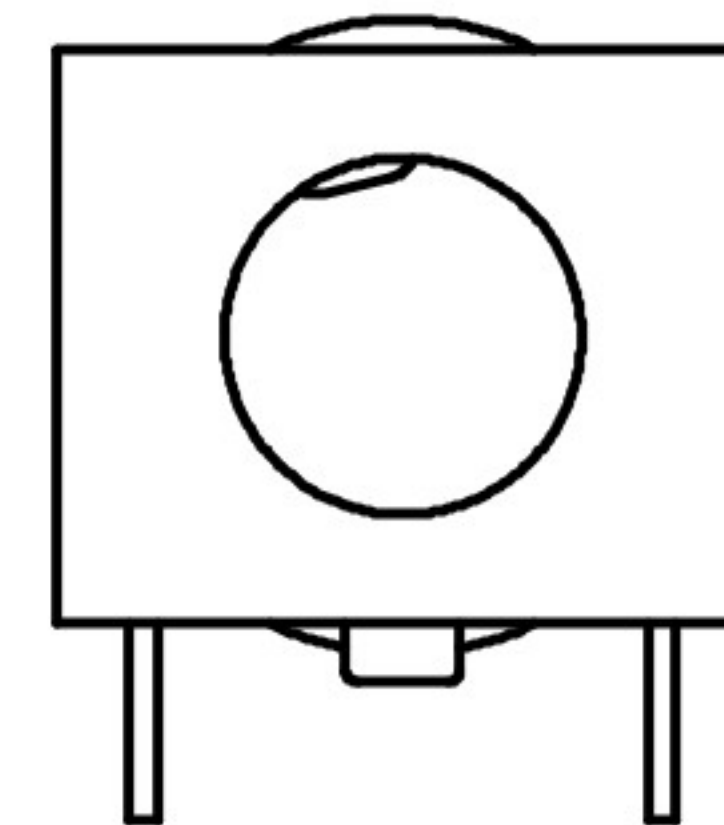
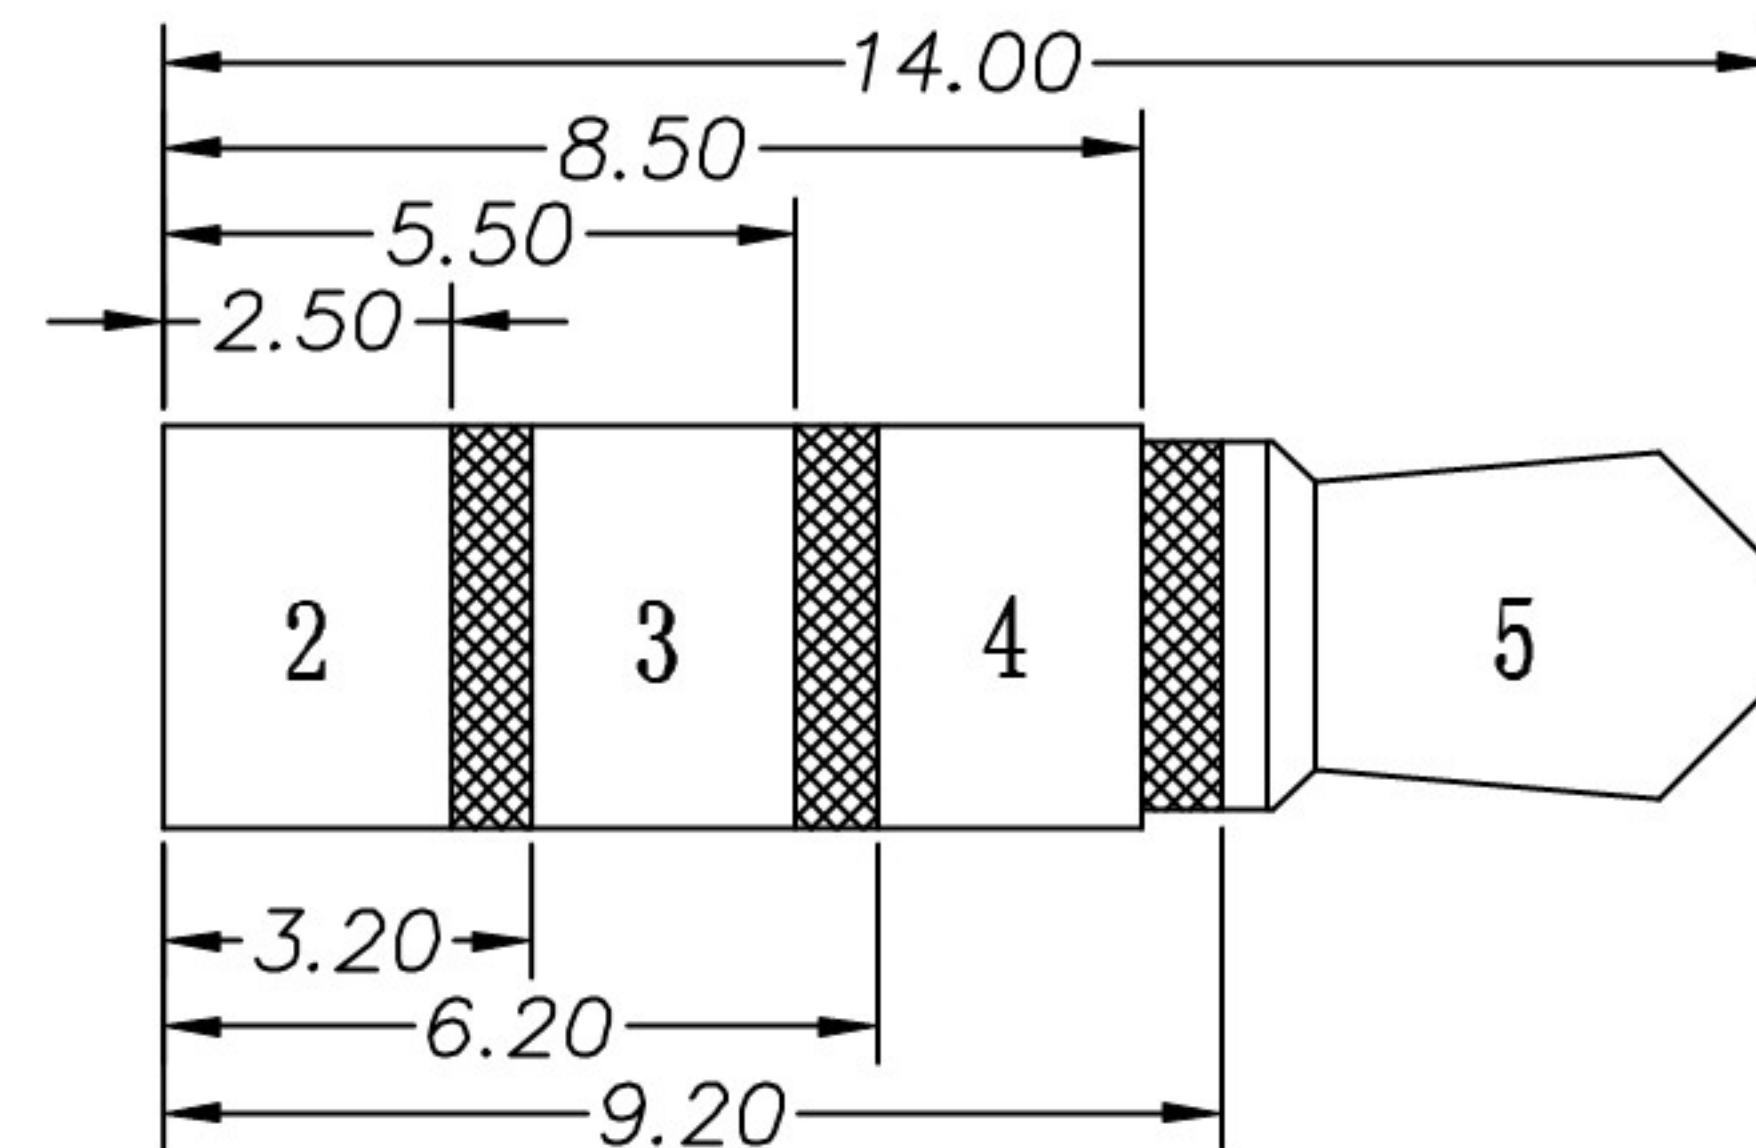
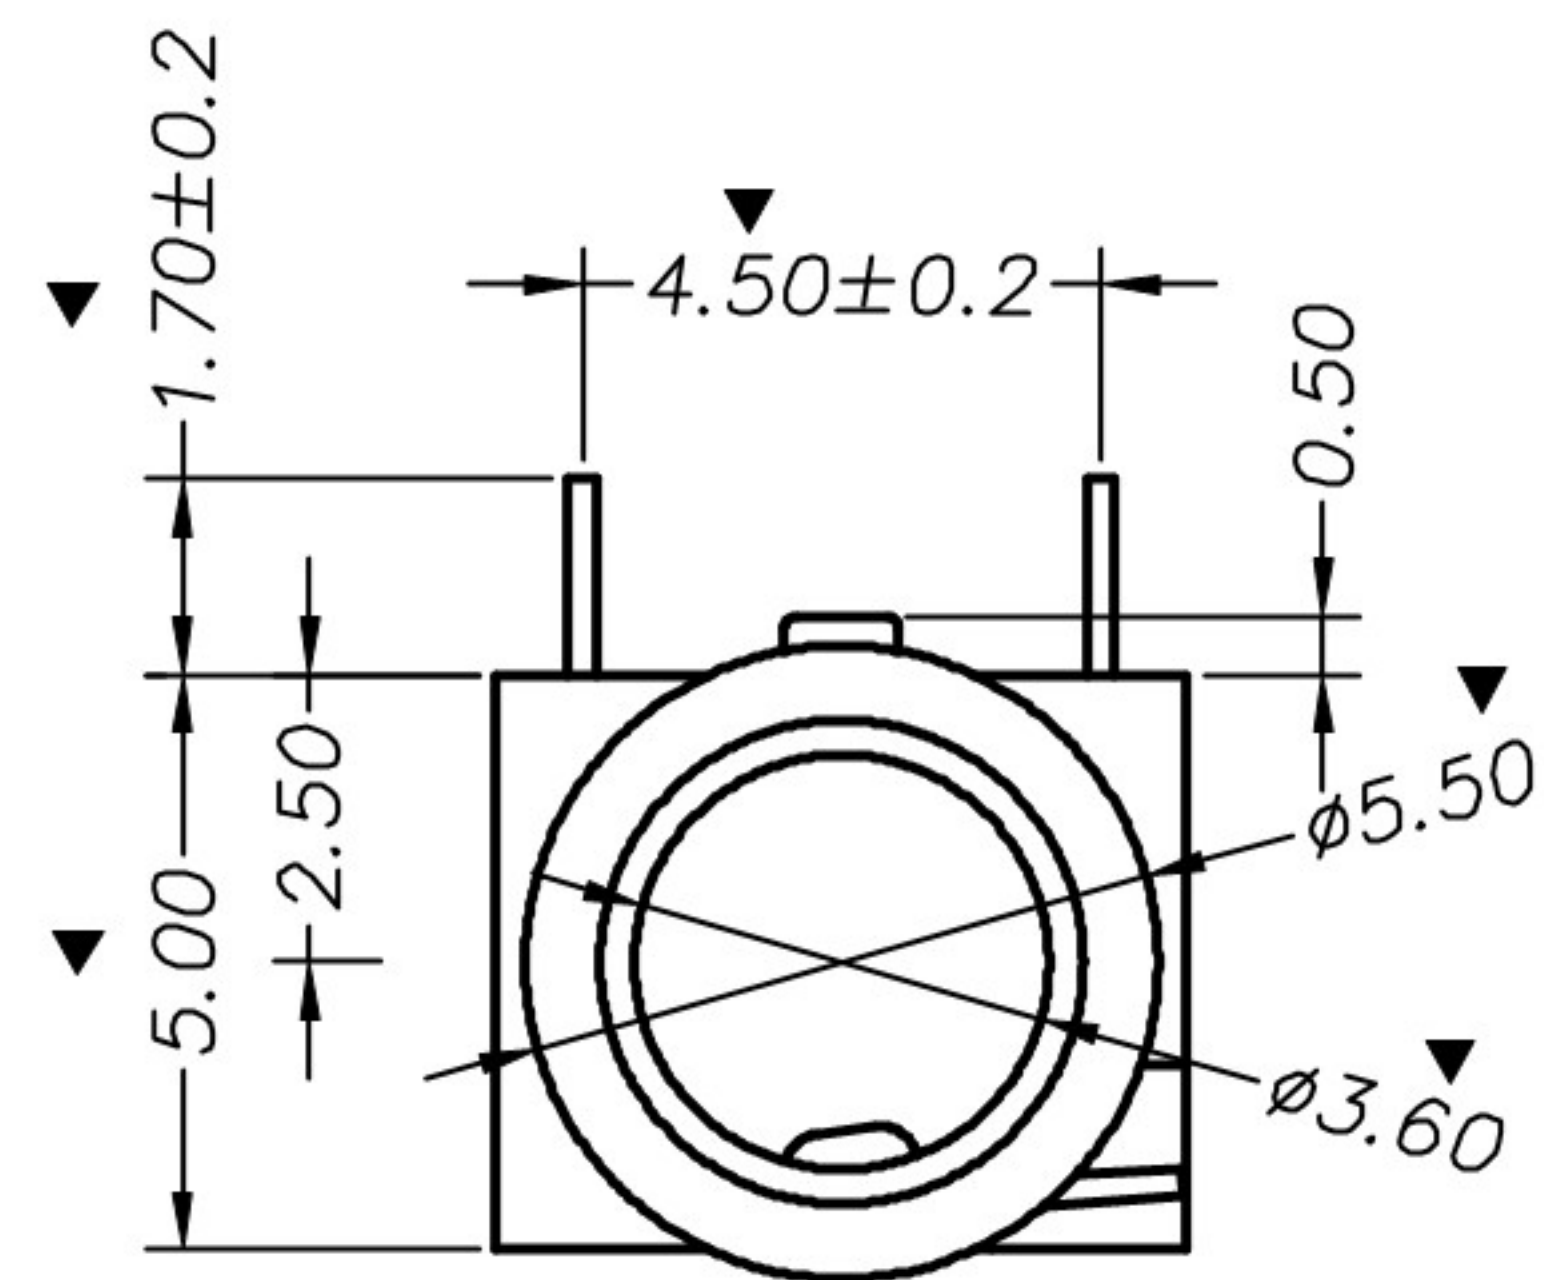


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

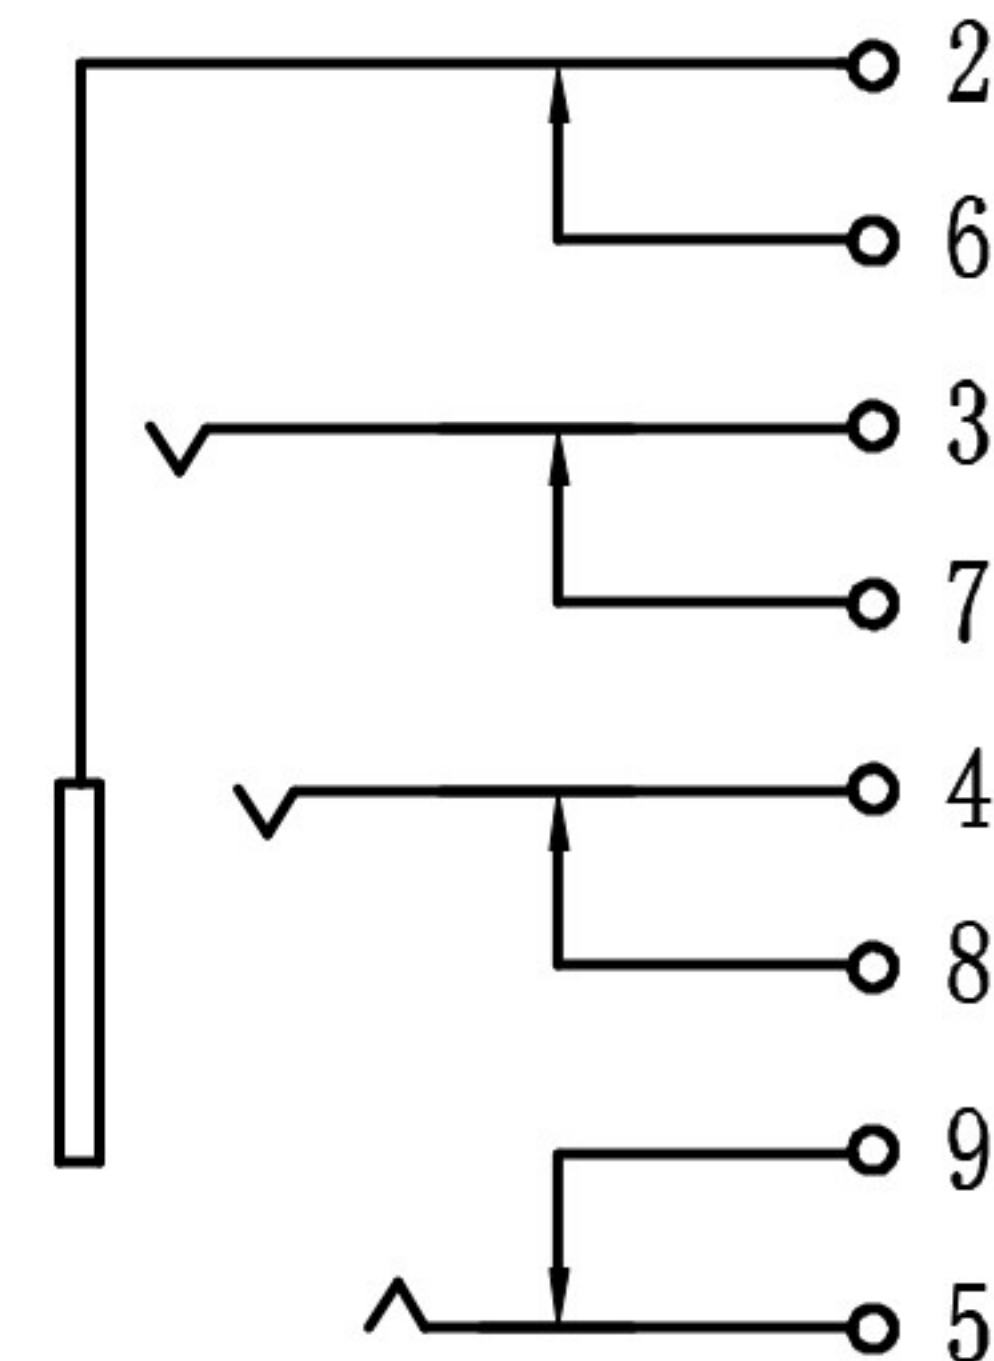

P. C. B LAYOUT TOP VIEW

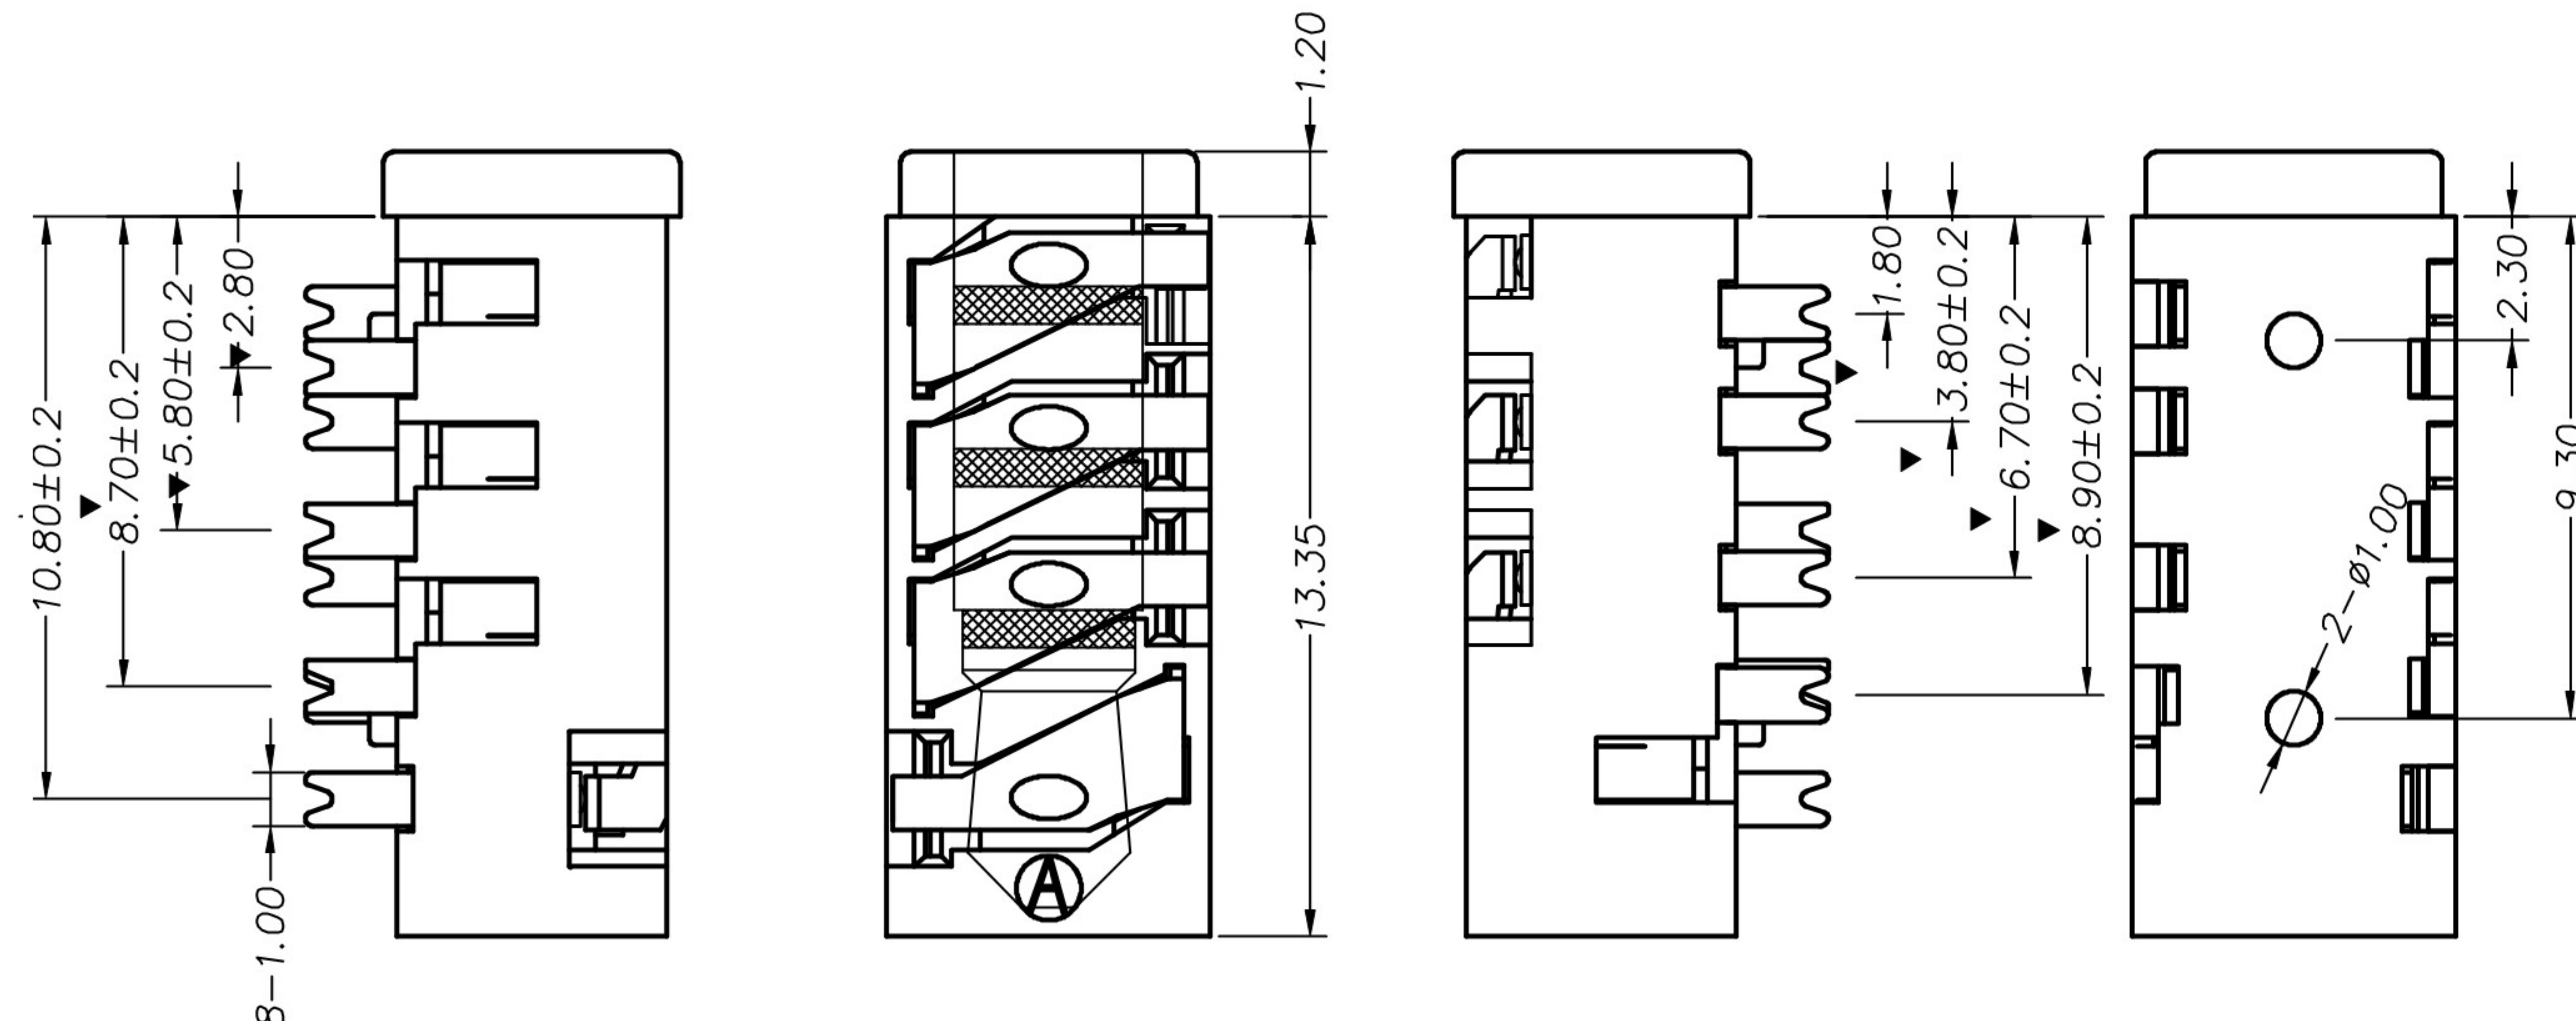

							UNLESS OTHERWISE SPECIFIED TOLERANCES		XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
							主要技术性能			
							额定电负荷		DC 30V\0.5A	
							接触电阻		≤0.03Ω	
							绝缘电阻		≥100MΩ	
							耐 压		AC500V(50Hz)/min	
							插 拔 力		3-20N	
							使用温度范围		-30-70℃	
							使用寿命		5000次	
							DECIMALS:		ANGLES:	
							DIM		TOL	
							X.		±0.35	
							X.X		±0.30	
							X.XX		±0.20	
							X.XXX		±0.10	
							X.		±2°	
							X.X		±1°	
							X.XX		—	
							X.XXX		—	
							DWG NO.		Q/XM-CP-RD-XXXX	
							DESIGN:		Kai	
									2018.06.14	
							CHECK:		Lucky	
									2018.06.14	
							APPROVED		Lucky	
									2018.06.14	
							PART NAME:		PHONE JACK	
							PART NO.			
							REV.		UNIT:	
							A		mm	
							SHEET:		1/1	