

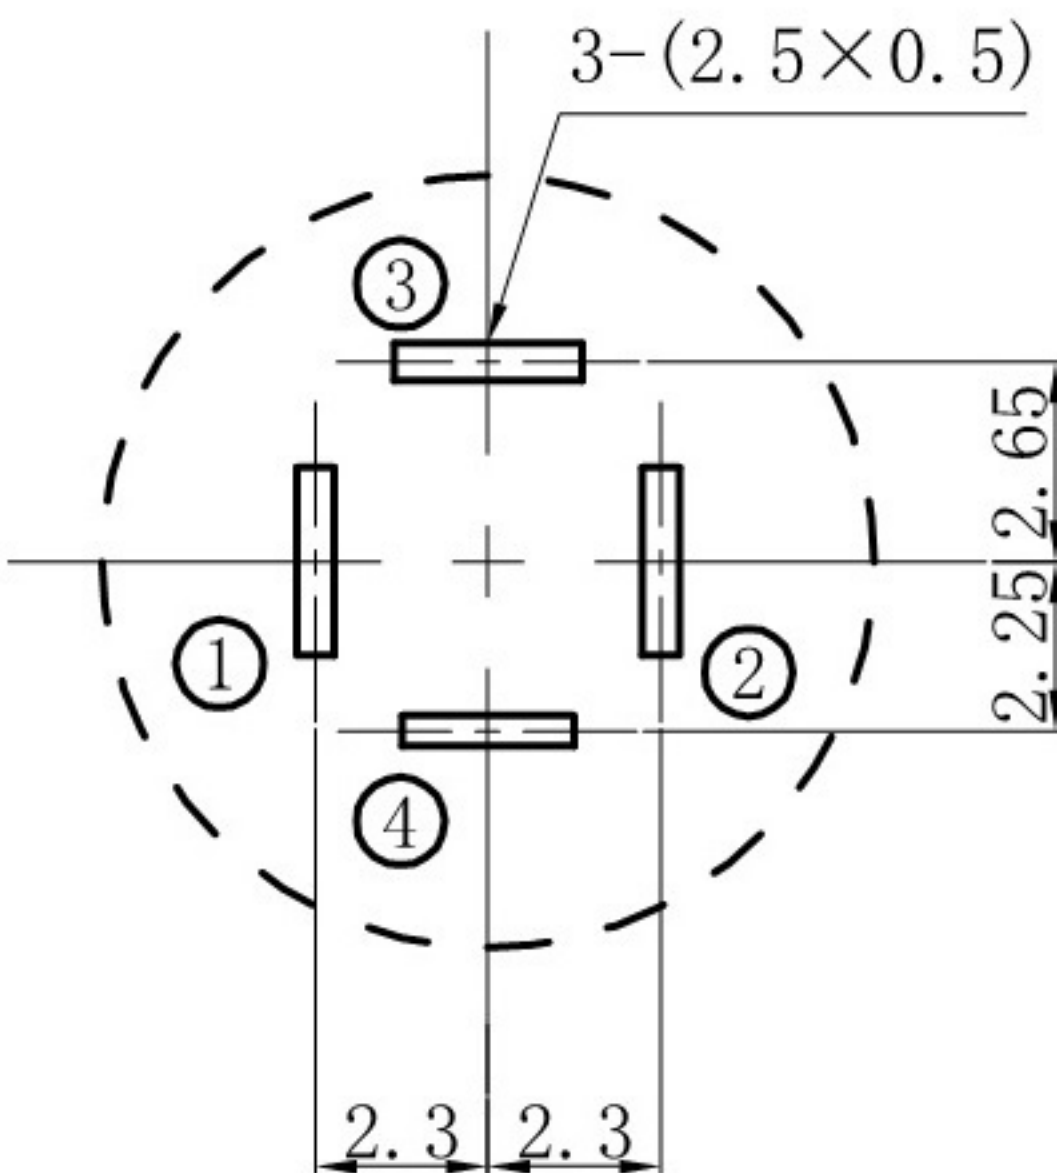



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	2018.05.11
B		UPDATE VERSION	JEFF	2022.06.11

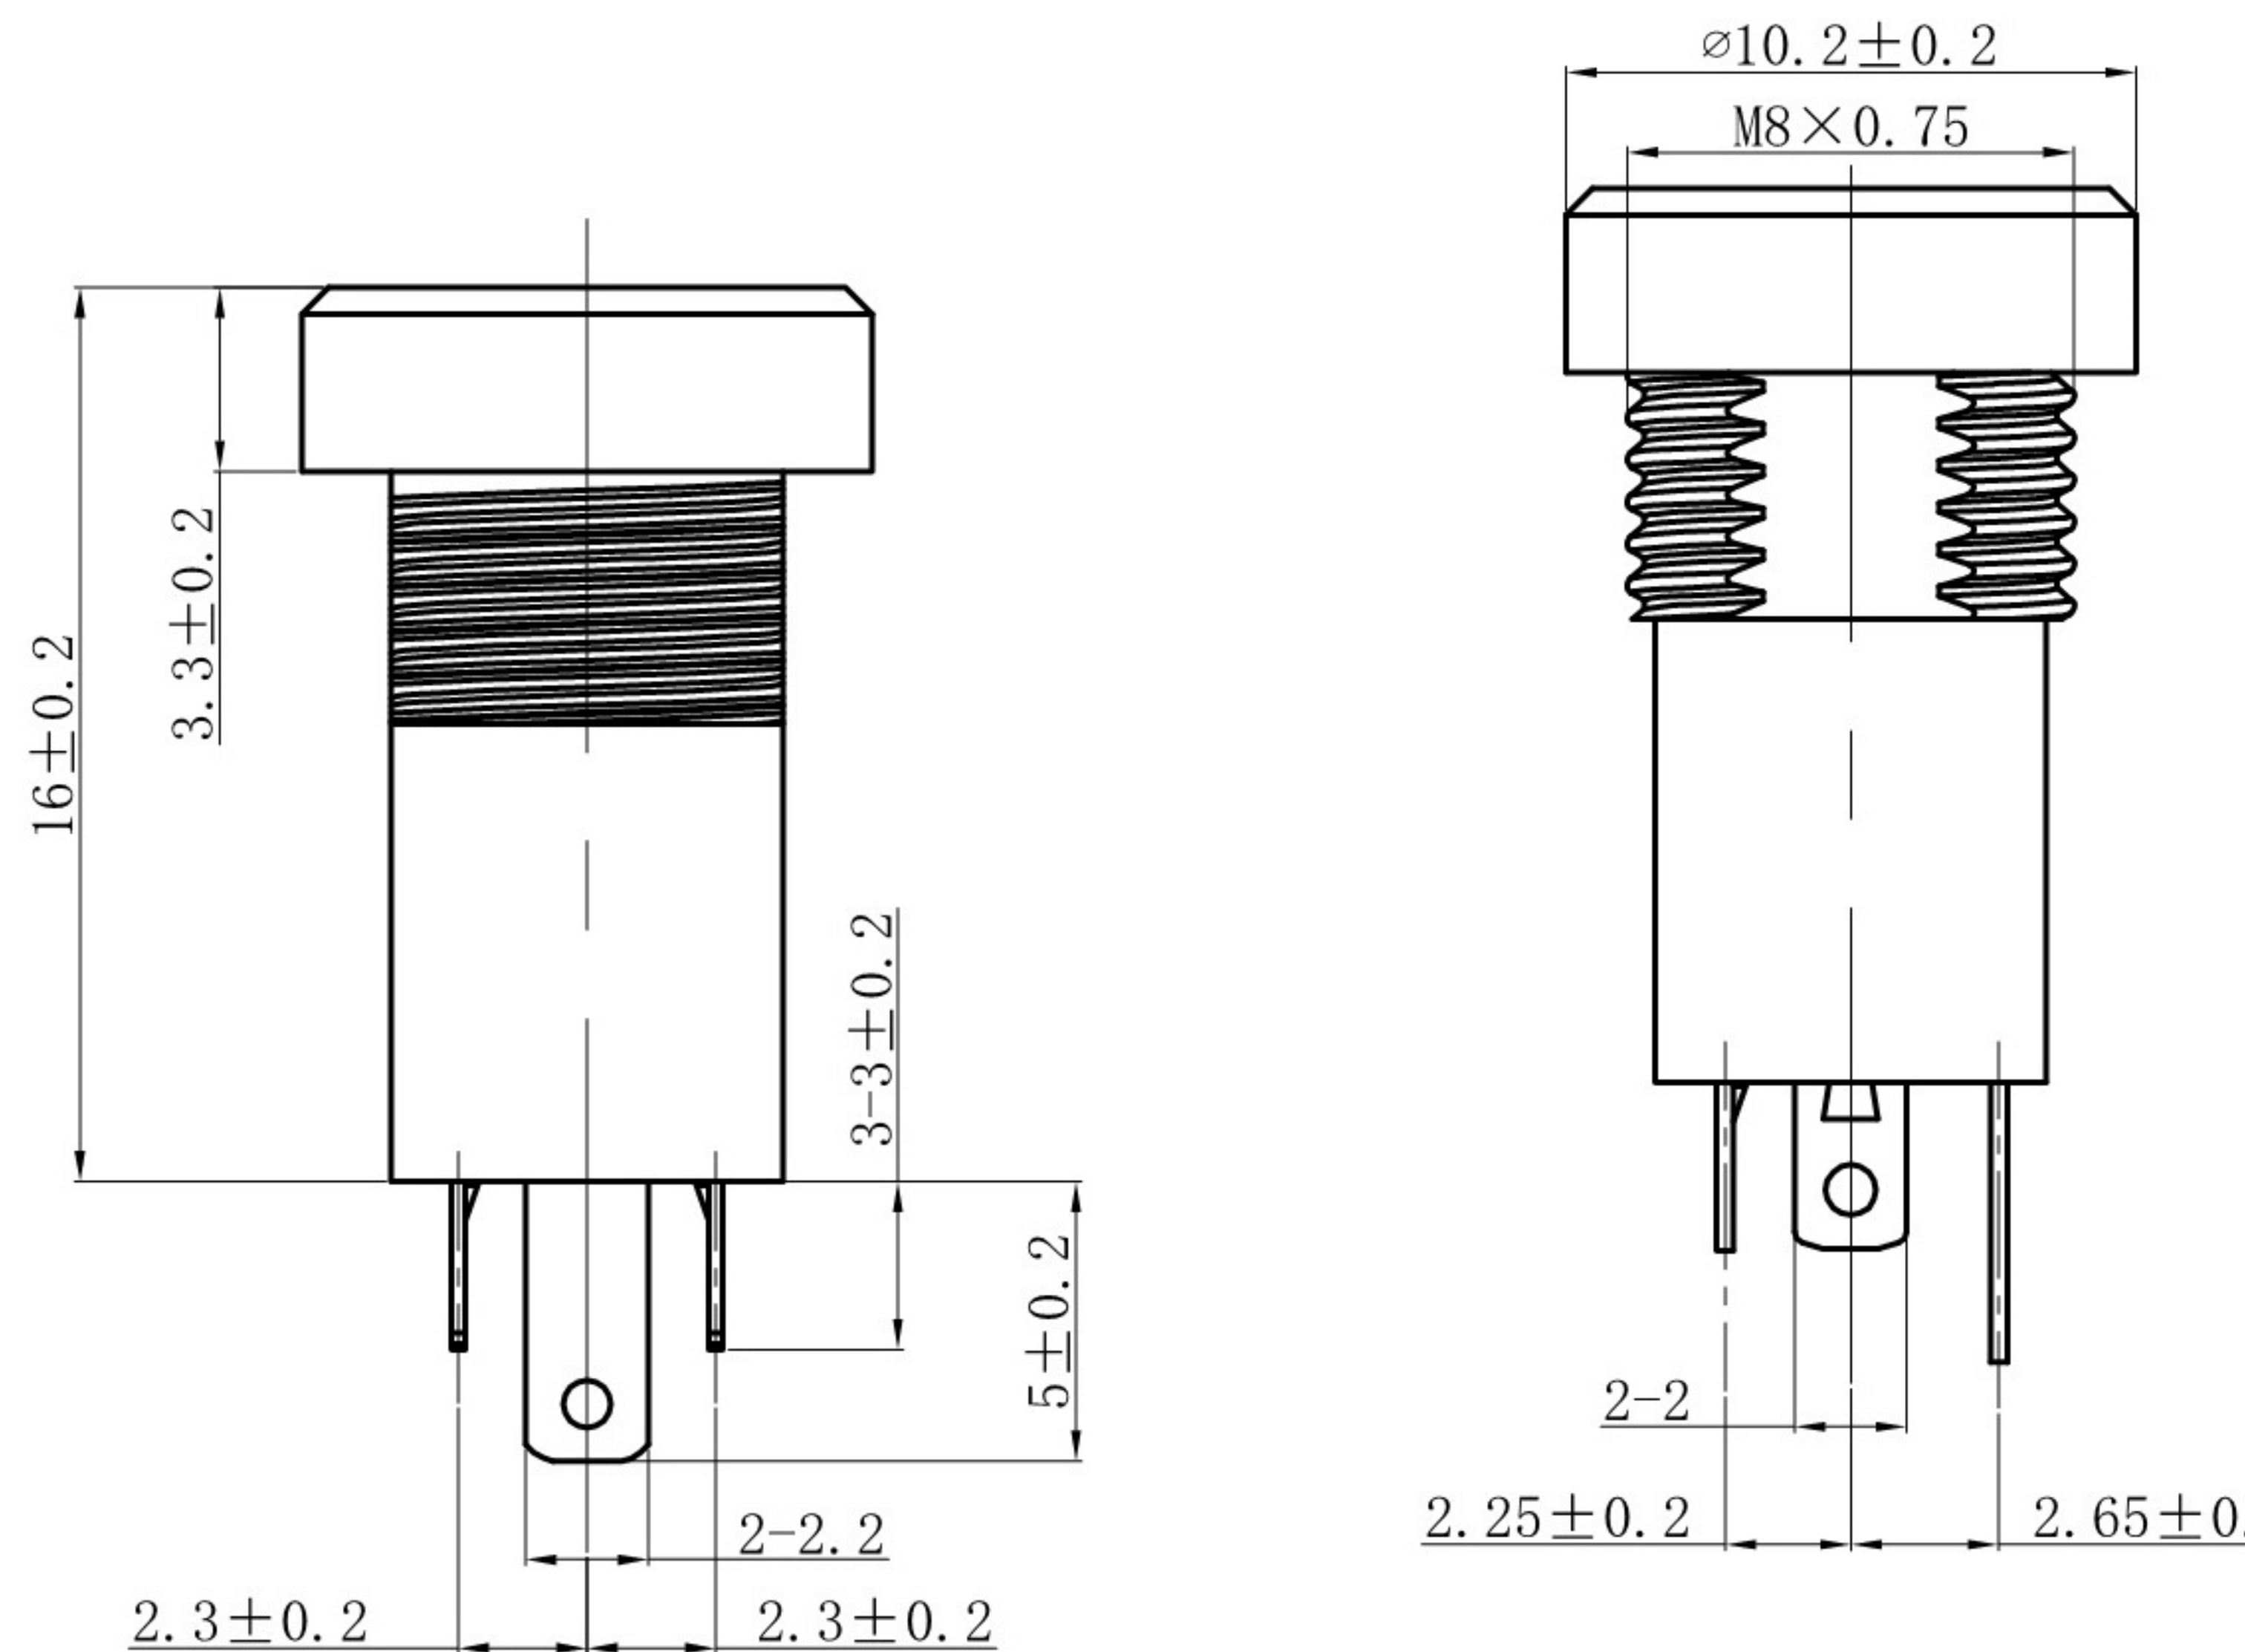

推荐PCB板开孔尺寸

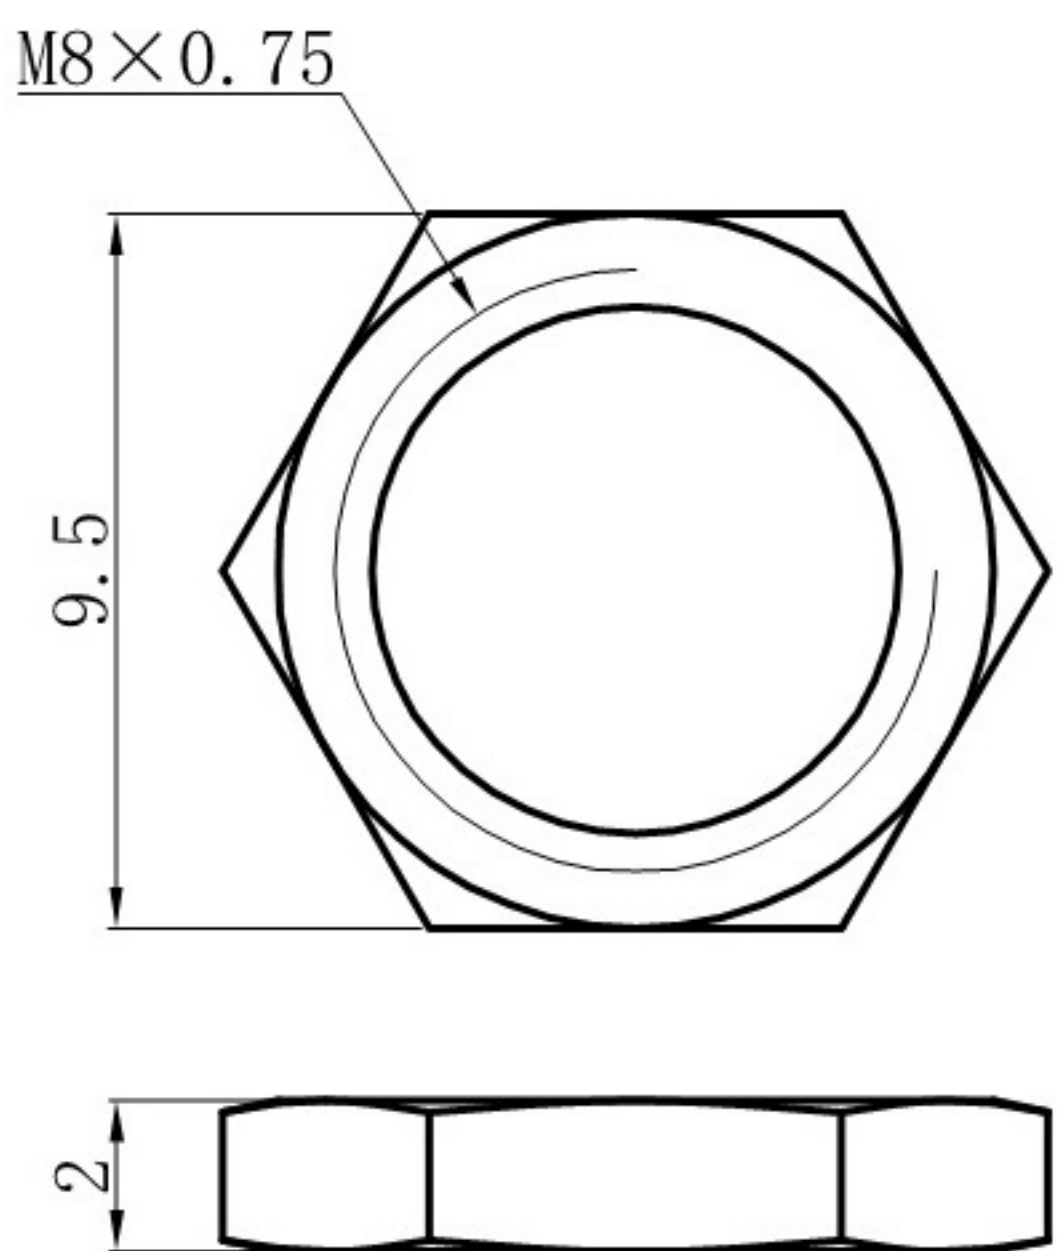

安装螺母

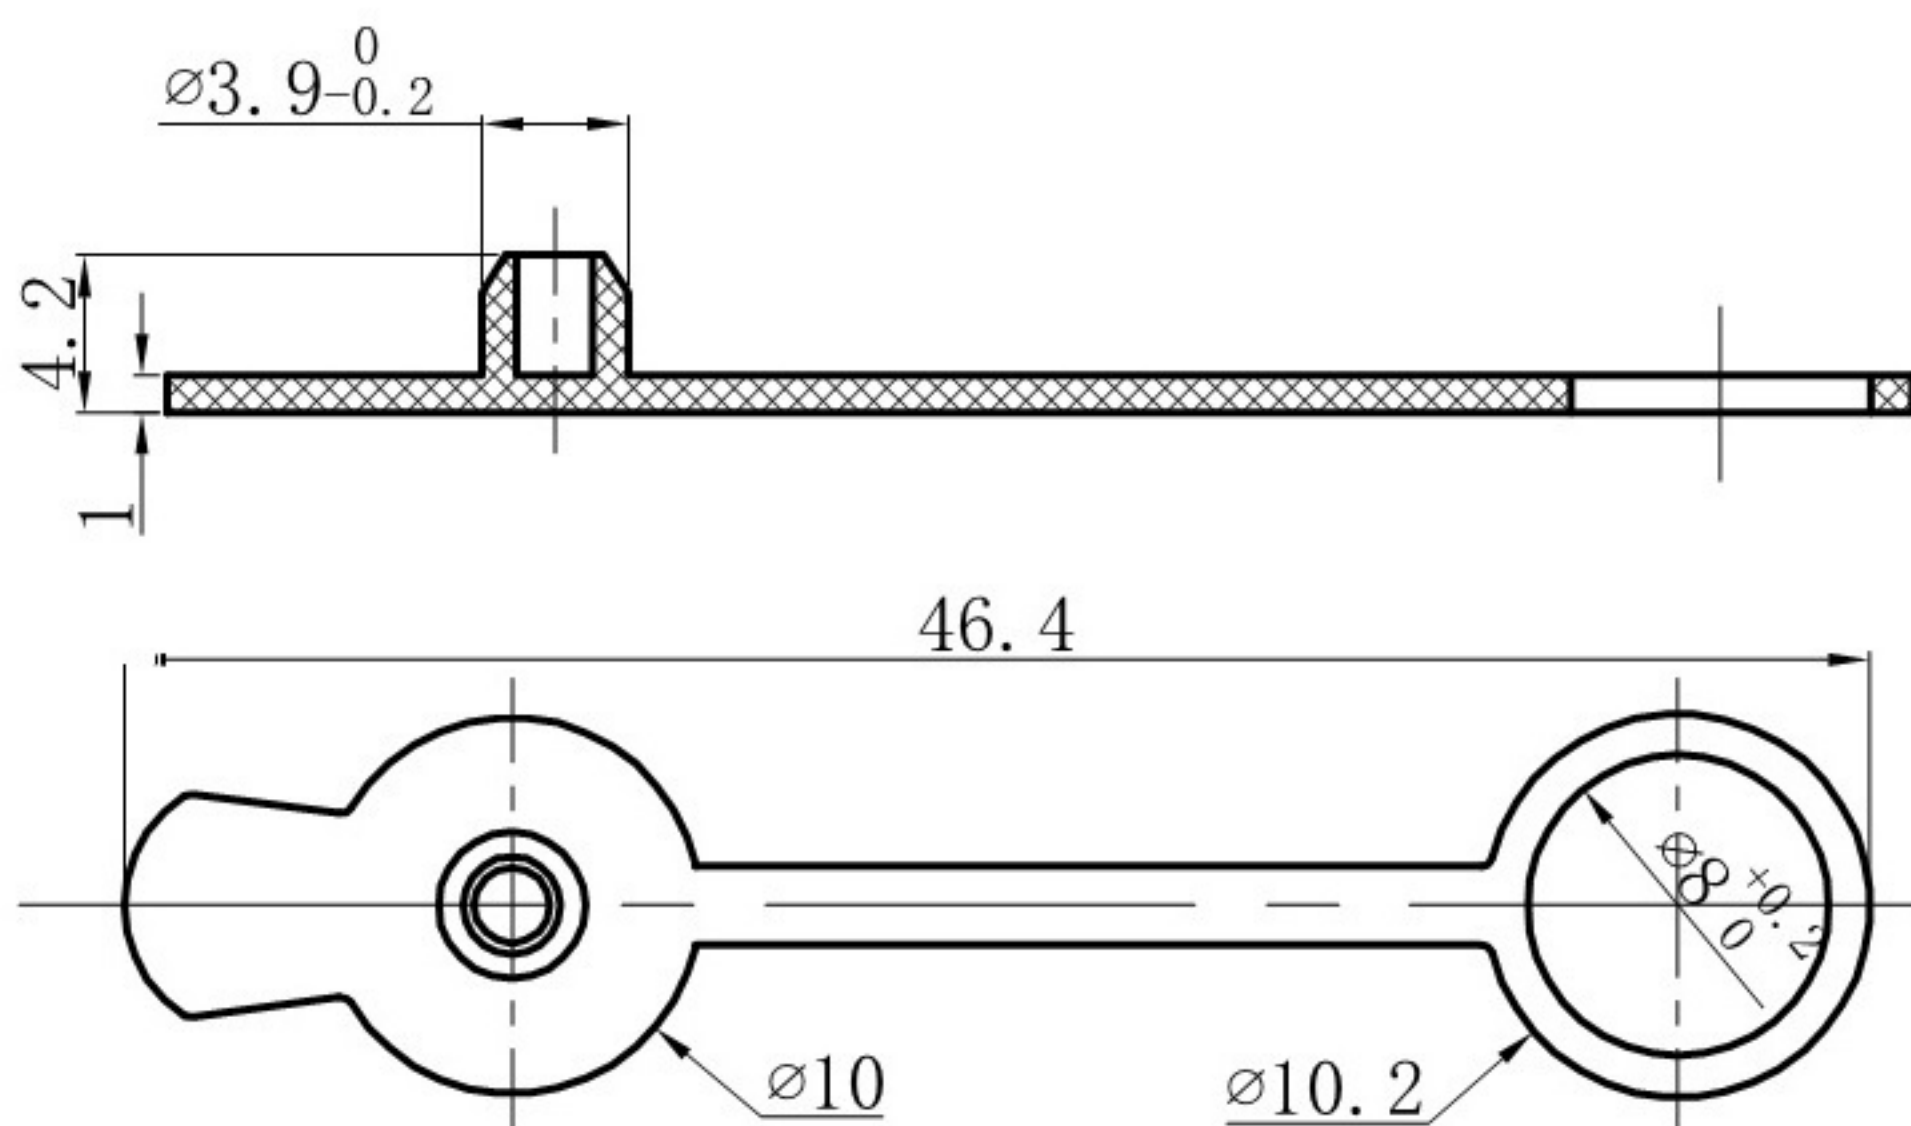

防尘帽

主要技术参数:

1. 电气性能

1.1. 额定电压电流: 12V 1A

1.2. 接触电阻: $\leq 30m\Omega$

1.3. 绝缘电阻: $\geq 100M\Omega$

1.4. 耐电压: AC500V/1min

2. 机械性能

2.1. 插入力: 3~20N

2.2. 拔出力: 3~20N

2.3. 耐久性: 5000次

3. 环境性能


3.1. 工作温度: $-25^{\circ}C \sim 85^{\circ}C$

3.2. 存储温度: $-25^{\circ}C \sim 85^{\circ}C$

4. 生产、工艺、包装要求

4.1. 耐焊接热: $265 \pm 5^{\circ}C / 3 \sim 5s$

电路原理图

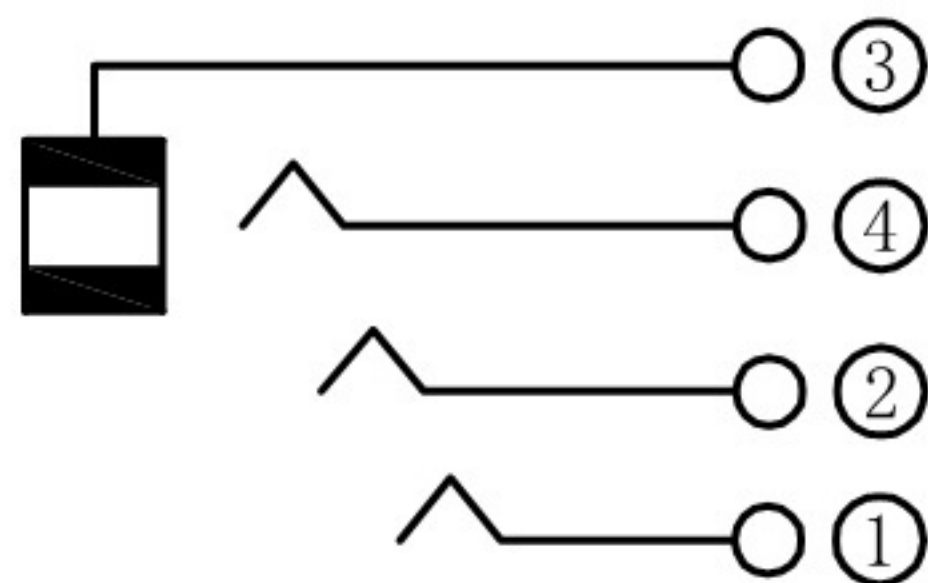

技术要求:

- 产品应无错装、漏装零件等现象;
- 零件应无裂纹、缺料、飞边、油污等不良现象, 镀层应均匀、光亮一致, 无锈迹、起泡、脱落等不良现象, 无变形;
- 产品符合ROHS要求。

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

QP
TP
IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ± 0.50
X.x ± 0.30
X.xx ± 0.20
X.xxx ± 0.10
ANGULAR $\pm 3^{\circ}$



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	DATE:	TITLE:
CHECKED:	DATE:	DC POWER JACK CONNECTOR
APPROVED:	DATE:	
PART NO. XB-PJ-391-4P-0-1	REV.: B	SCALE: 1:1
DRAWING NO.	SIZE: A4	SHEET: 1/1

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	HIGH TEMPERATURE;COLOR BLACK	