
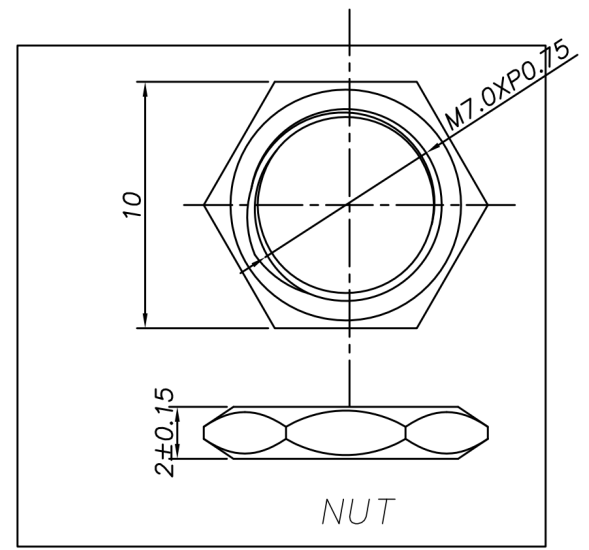
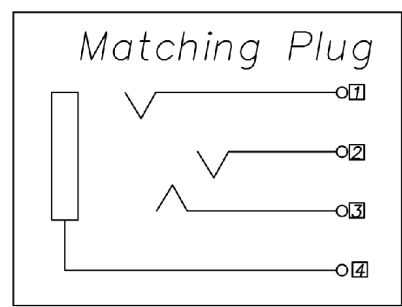
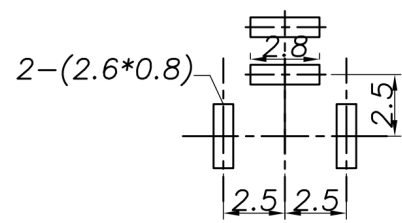

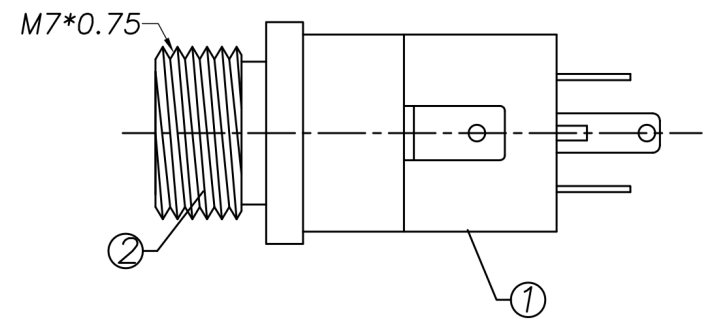


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

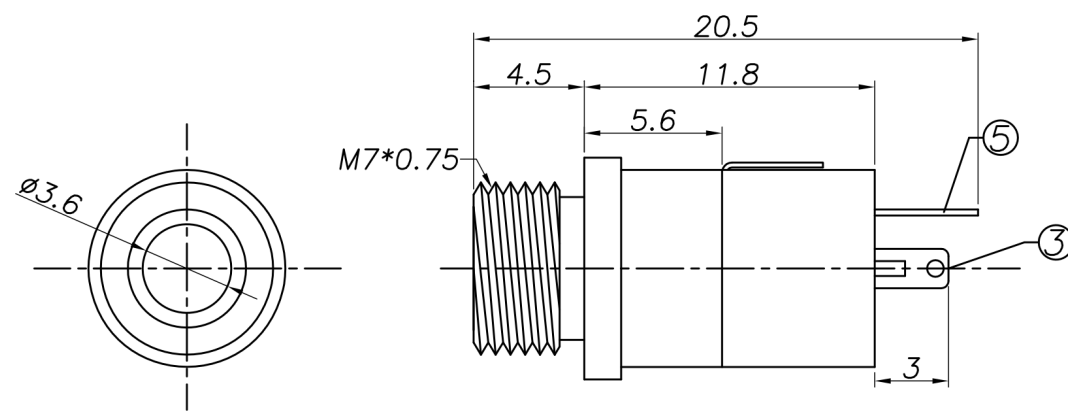

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

主要性能						
额定电负荷	DC 30V\0.5A					
接触电阻	$\leq 0.03\Omega$					
绝缘电阻	$\geq 100M\Omega$					
耐压	AC500V (50Hz)/min					
插拔力	3-20N					
使用温度范围	-30~70℃					
使用寿命	5000次					

UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.35	X.	$\pm 2^\circ$
X.X	± 0.30	X.X	$\pm 1^\circ$
X.XX	± 0.20	X.XX	$\pm 0.5^\circ$
X.XXX	± 0.10	X.XXX	$\pm 0.2^\circ$

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DWG NO.	Q/XM-CP-RD-XXXX	PART NAME:	PHONE JACK
DESIGN:	Kai	PART NO.	XB-PJ-392A
CHECK:	Lucky	REV.	A
APPROVED	Lucky	UNIT:	mm
		SHEET:	1/1

序号	产品编号	产品名称	数量	材料	规格	电镀
4		盖脚	1	磷铜	0.25T	镀银
3		弹片脚	1	铍青铜	0.2T	镀银
2		中脚	3	磷铜	0.2T	镀银
1		底座	1	PPA		黑色