
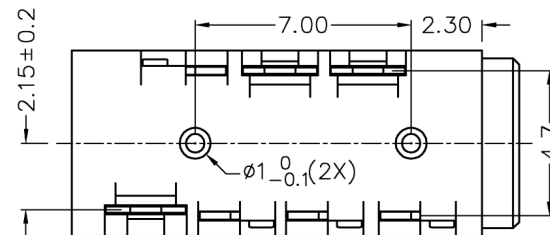
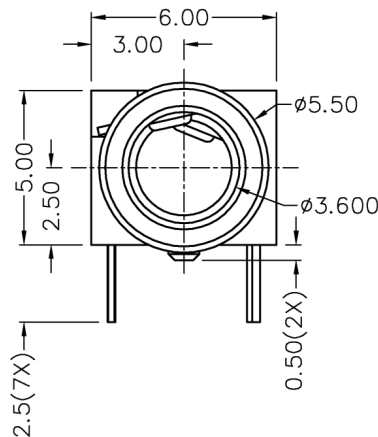



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

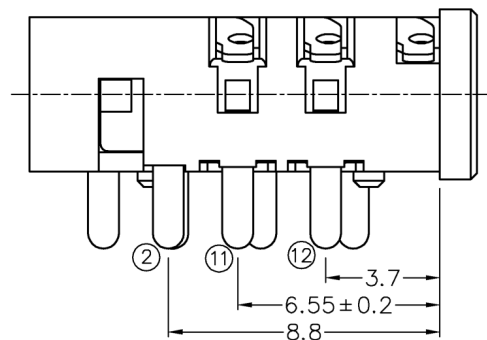



MODEL NO.	TSH-3917	TSH-3916A	TSH-3915A	TSH-3914	TSH-3915
SCHEMATIC					

* MATERIAL


TERMINAL 1 : COPPER ALLOY
 TERMINAL 2 : COPPER ALLOY
 TERMINAL 3 : COPPER ALLOY
 TERMINAL 4 : COPPER ALLOY
 TERMINAL 10 : BRASS
 TERMINAL 11 : BRASS
 TERMINAL 12 : BRASS
 HOUSING : PA66

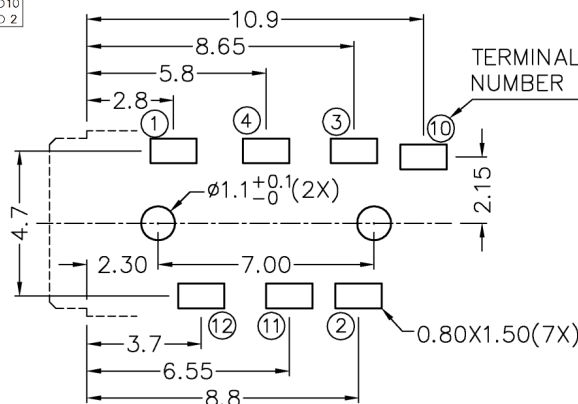

PCB LAYOUT
(BOTTOM VIEW)

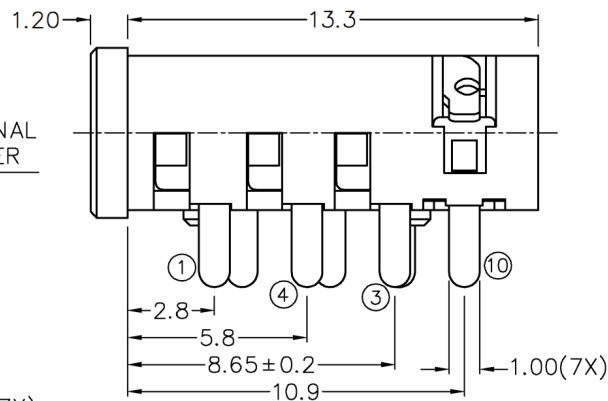

Ø3.5 MATE PLUG



主要技术性能						
额定电负荷	DC 30V/0.5A	接触电阻	≤0.09Ω	绝缘电阻	≥100MΩ	耐压
AC500V(50Hz)/min	插拔力	3-20N	使用温度范围	-30~70℃	使用寿命	5000次

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.X	±0.35	X.X	±2°
X.XX	±0.30	X.XX	±1°
X.XXX	±0.20	X.XXX	—
X.XXX	±0.10	X.XXX	—



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

DWG NO.	Q/XM-CP-RD-XXXX	PART NAME:	PHONE JACK
DESIGN:	Kai	PART NO.	XB-PJ-393-7p-D
CHECK:	Lucky	REV.	UNIT: SHEET: 1/1
APPROVED	Lucky		

序号	产品编号	产品名称	数量	材料	规格	电镀
4		盖脚	1	磷铜	0.25T	镀银
3		弹片脚	1	镀青铜	0.2T	镀银
2		中脚	3	磷铜	0.2T	镀银
1		底座	1	PPA		黑色