
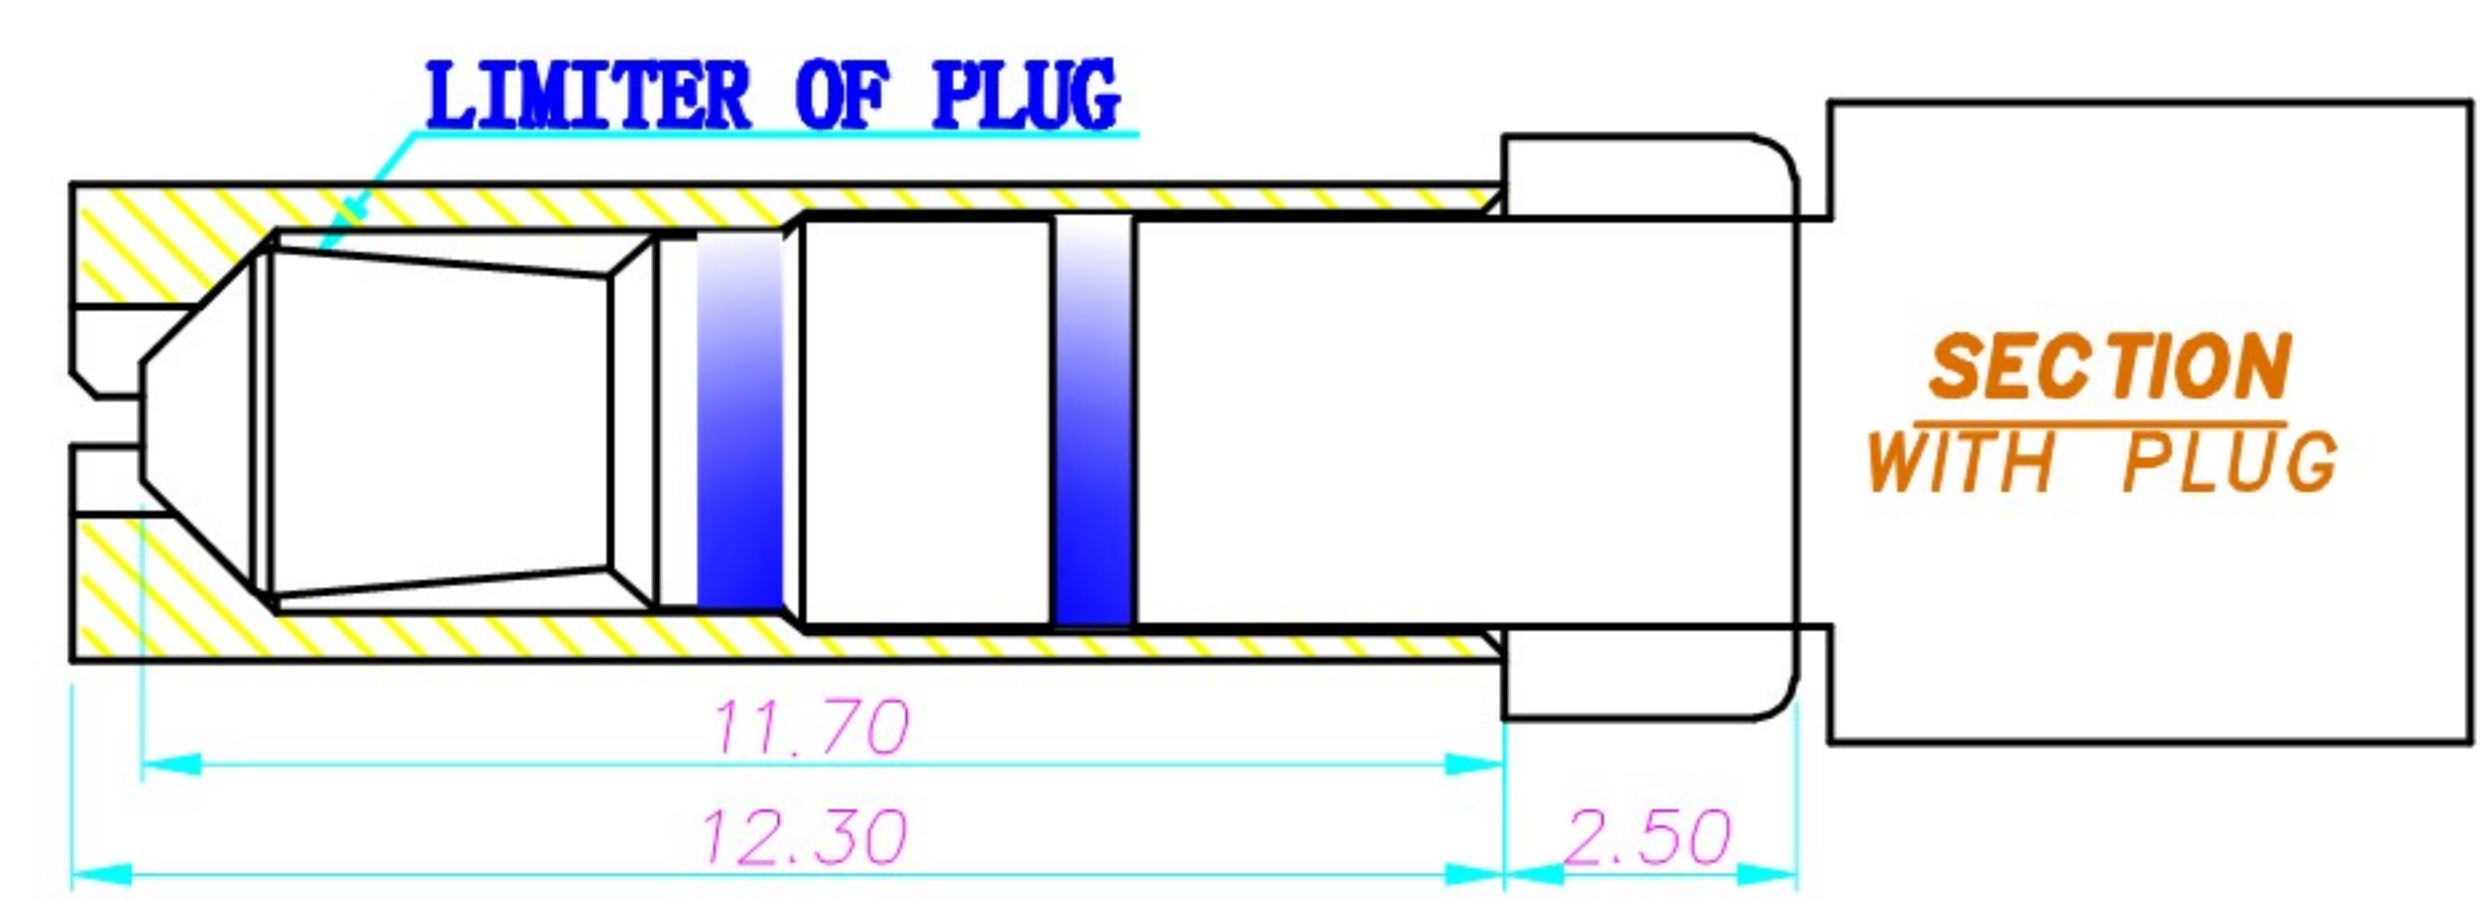
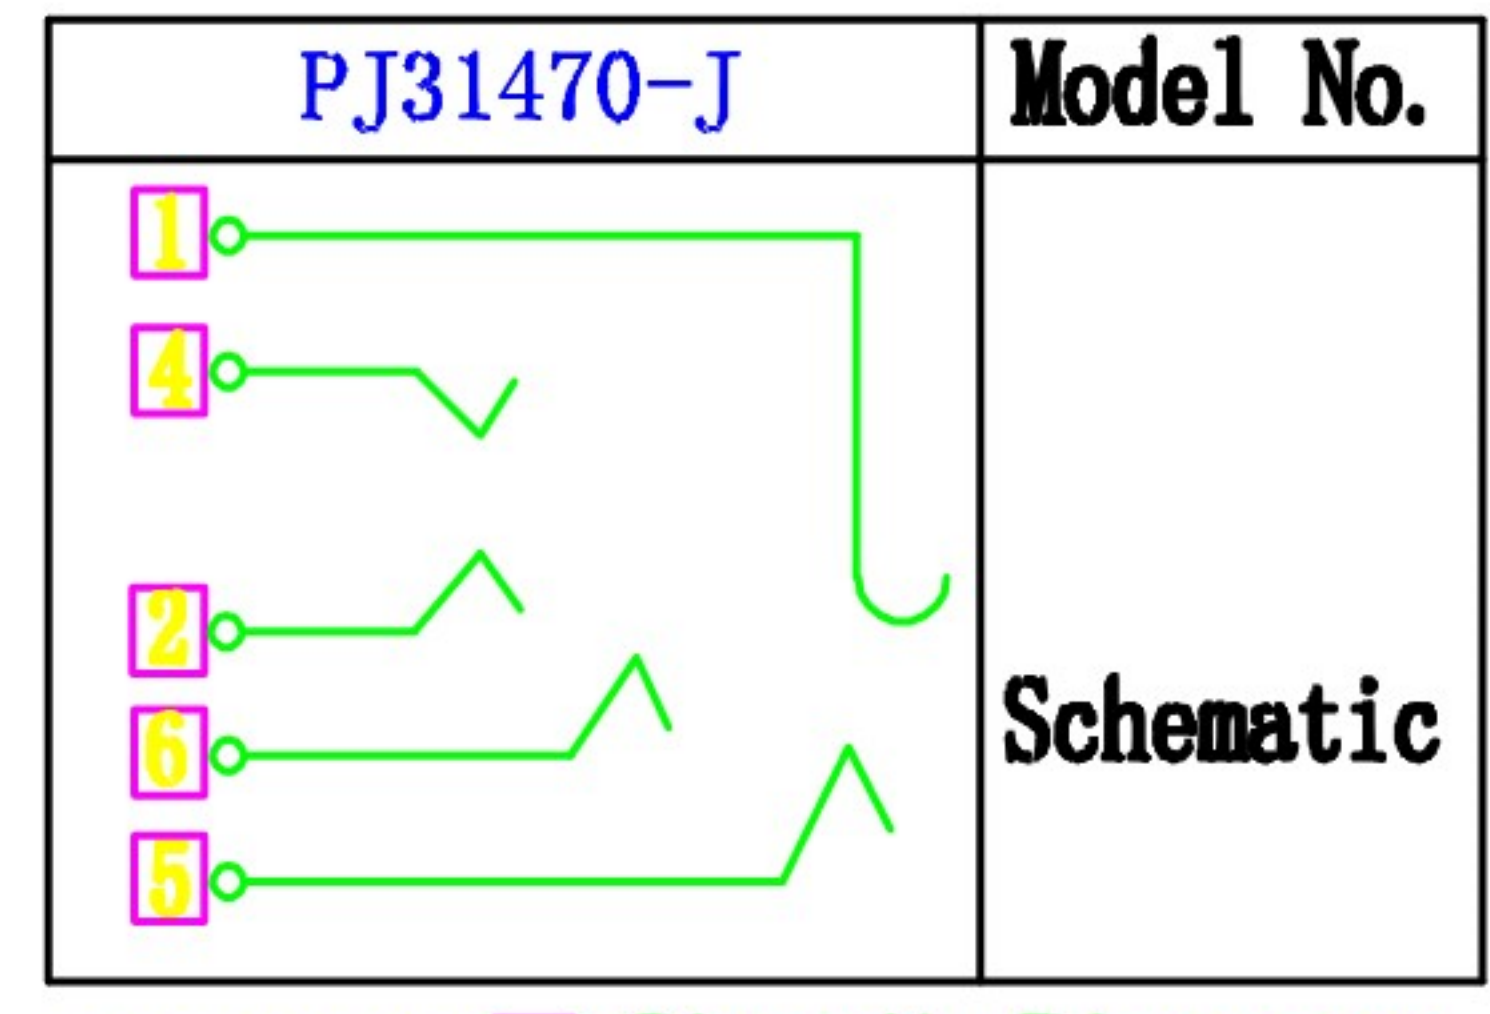
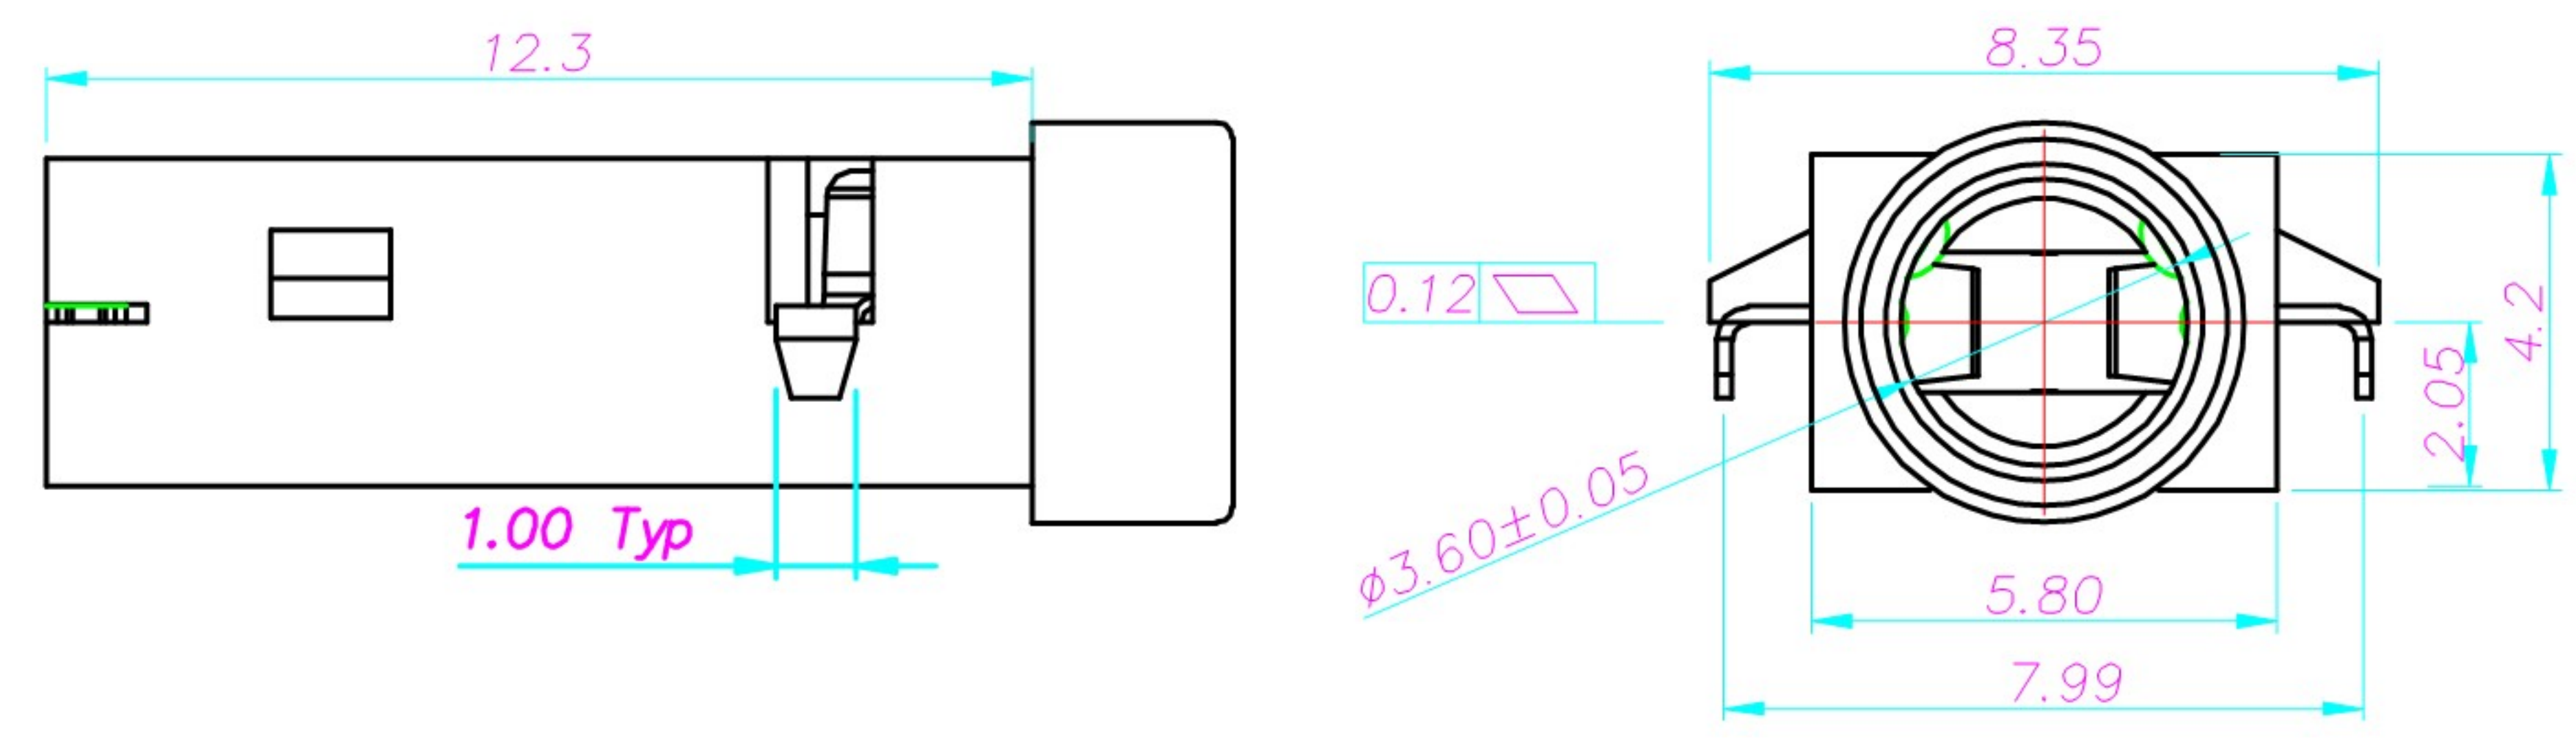
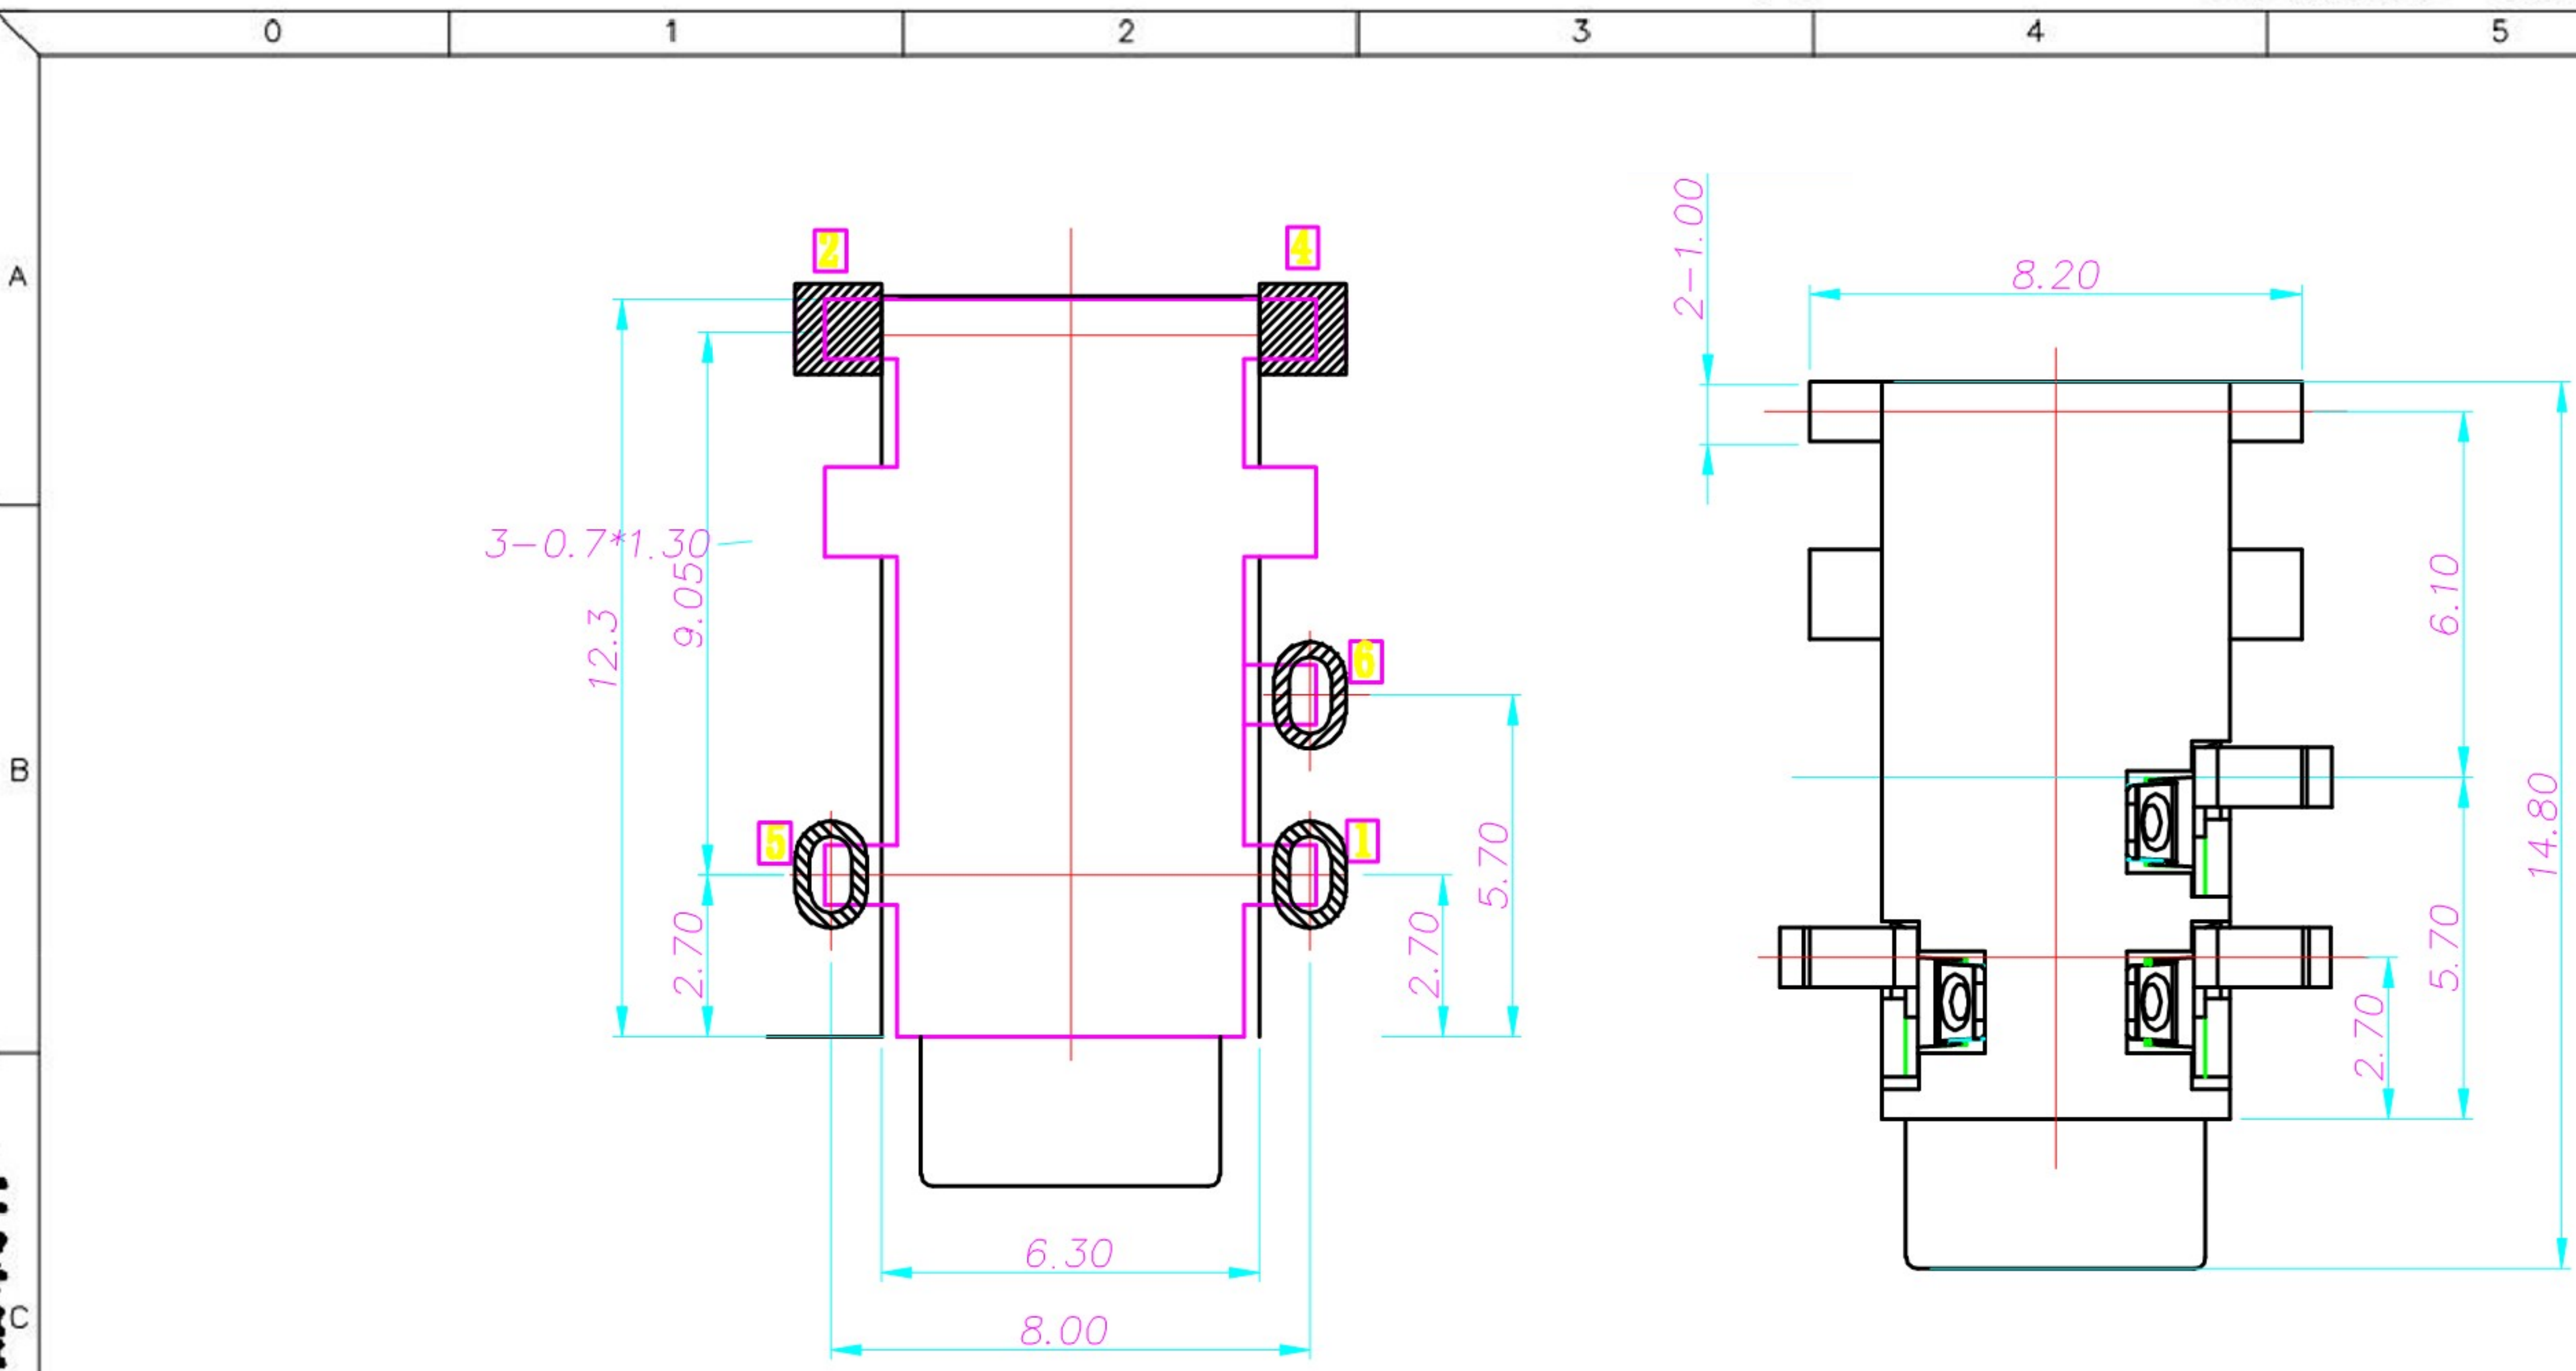


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

Ordering information:
PJ31470-J LC □ □ G □ □ 1
(7) (6) (5) (4) (3) (2) (1)
:Series No(1)
J :Schematic option:(2)
:Material of housing:LC=LCP (3)
:Housing color:(4)
2_=Red 1_=Brown 0A=Black
4_=Yellow 5_=Green 3_=Orange
7_=Purple 8_=Gray 6_=Blue
9_=White
:Terminal plating(5)
G=Gold(Au)
:Special option:(6)
00=No special option
GG=Guo Guang mark
:Packing mode:(7)
1=Reel packing

SPECIFICATION
1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤30mΩ;
3.Insulation resistance: ≥100MΩ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;
6.life test: 5,000 cycles.

P. C. B Layout (T=1.0)
(Top view)

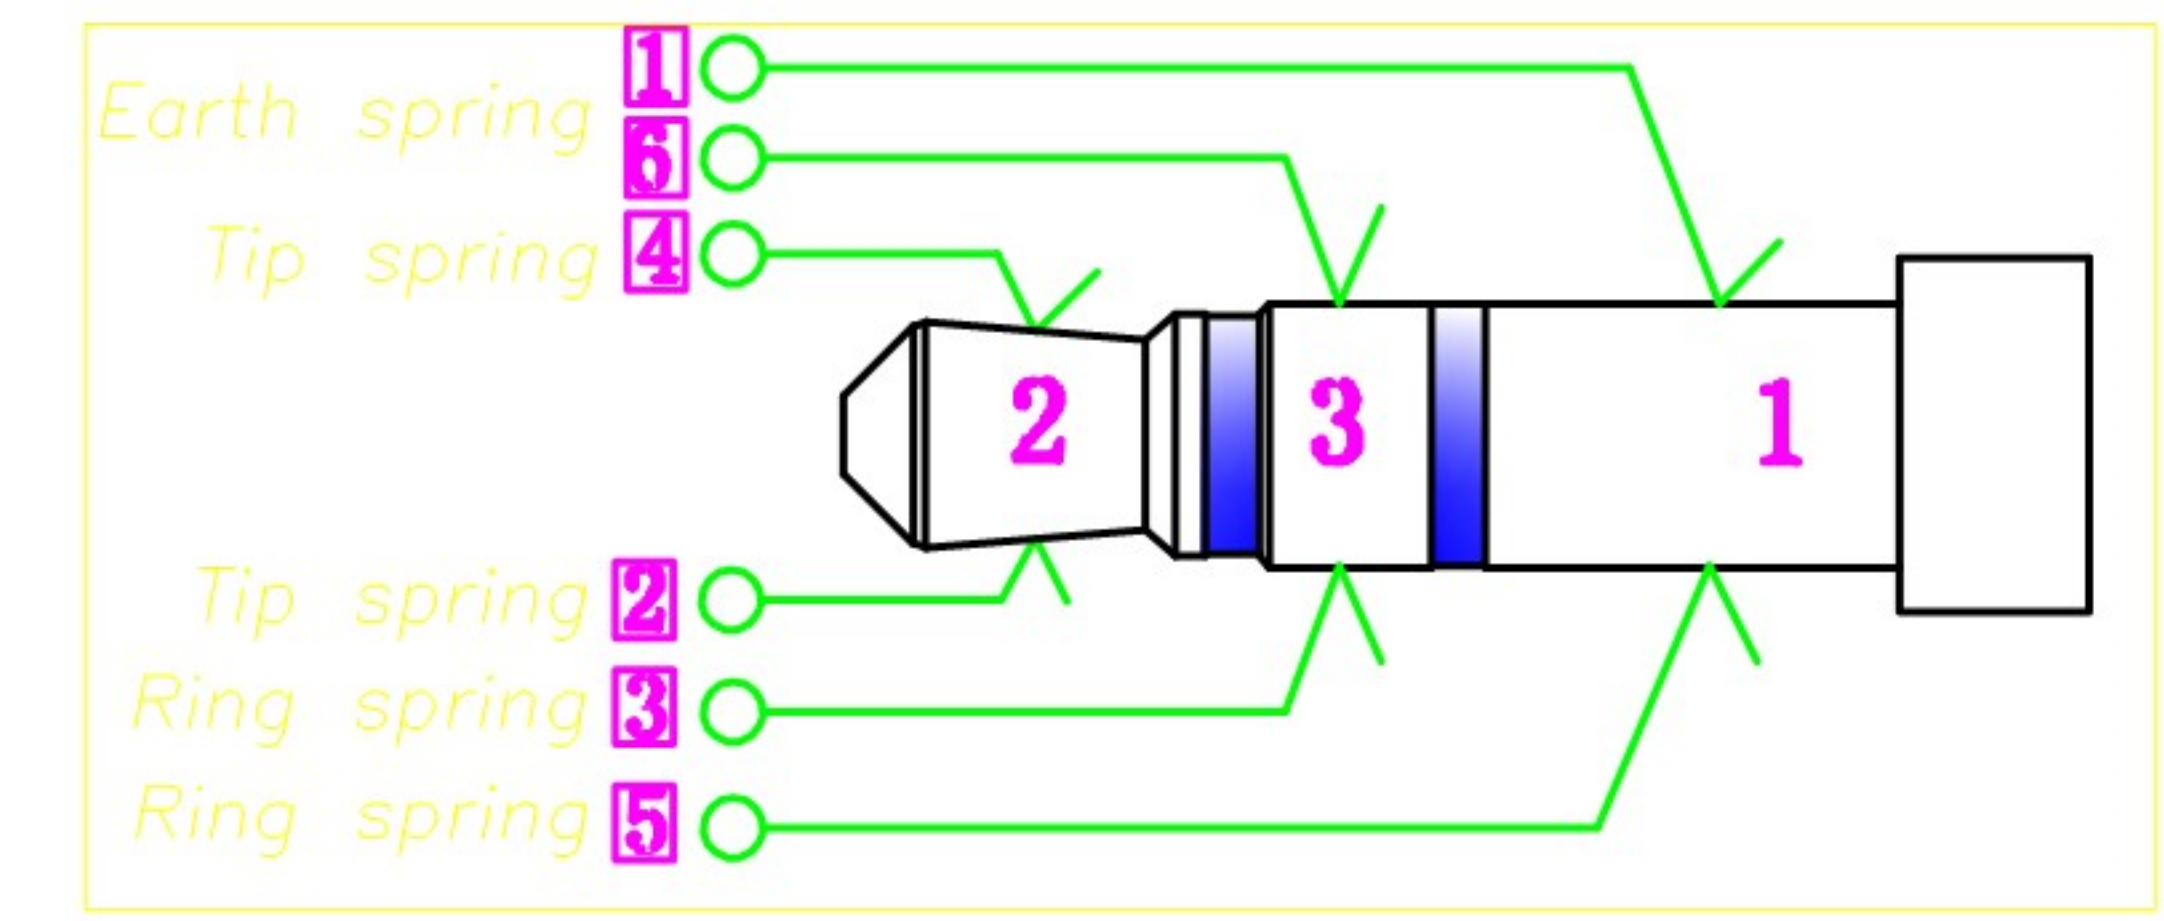

PJ31470-J Model No.							UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司			
Schematic							DECIMALS:				DONG GUAN XI BANG ELECTRONICS CO., LTD.			
: Terminal NO. □ Circuit Diagram							ANGLES:				PART NAME:			
							DIM TOL				PHONE JACK			
							X. ±0.35				PART NO.			
							X.X ±0.30				XB-PJ-3272-1			
							X.XX ±0.20				REV. A			
							X.XXX ±0.10				UNIT: mm			
											SHEET: 1/1			

主要技术性能						
额定电负荷	DC 30V\0.5A					
接触电阻	≤0.03Ω					
绝缘电阻	≥100MΩ					
耐压	AC500V(50Hz)/min					
插拔力	3-20N					
使用温度范围	-30~70℃					
使用寿命	5000次					

序号	产品编号	产品名称	数量	材料	规格	电镀
4		盖脚	1	磷铜	0.25T	镀银
3		弹片脚	1	镀青铜	0.2T	镀银
2		中脚	3	磷铜	0.2T	镀银
1		底座	1	P P A		黑色