
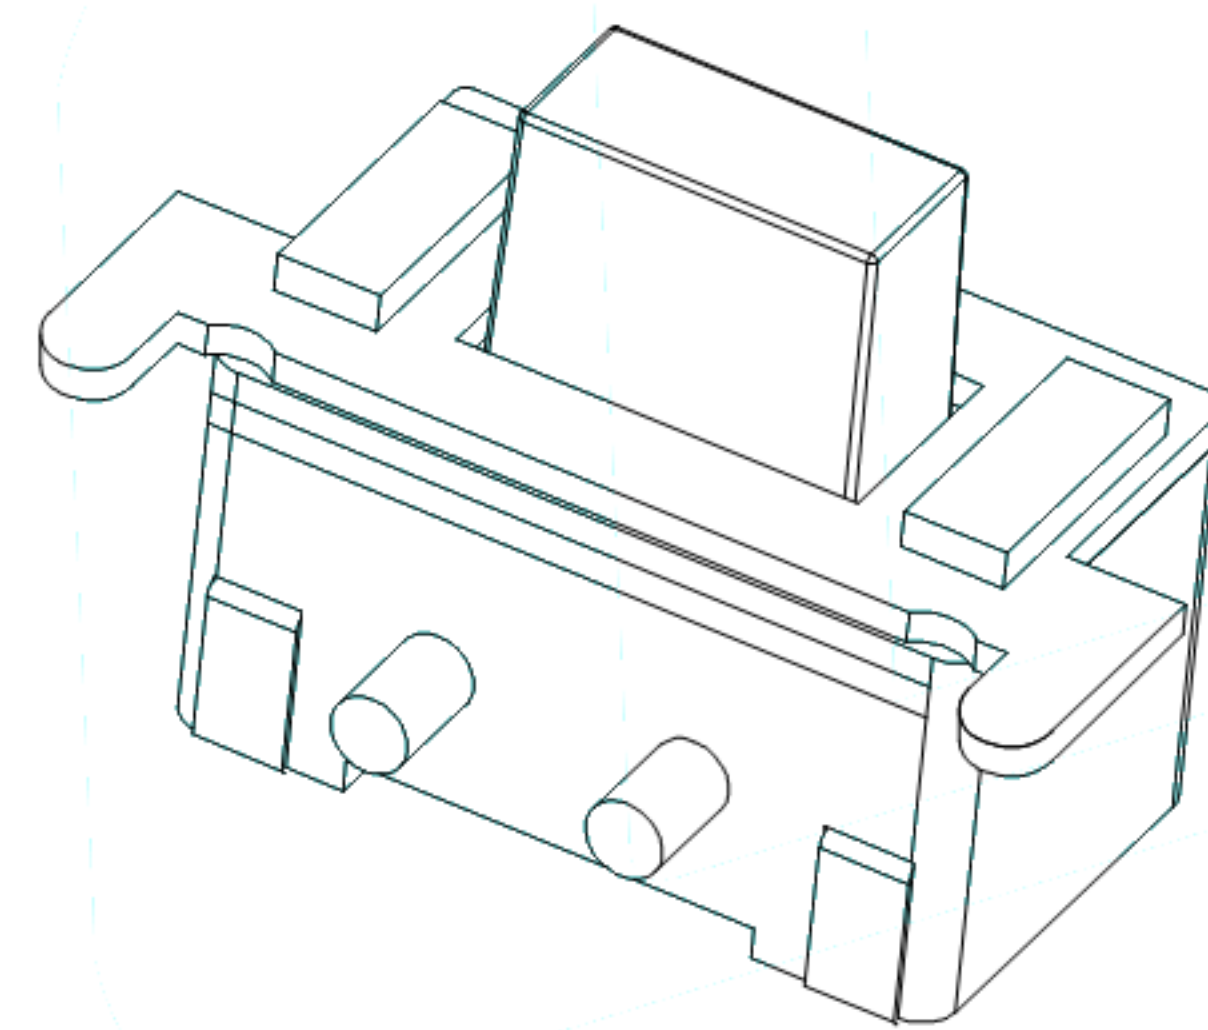
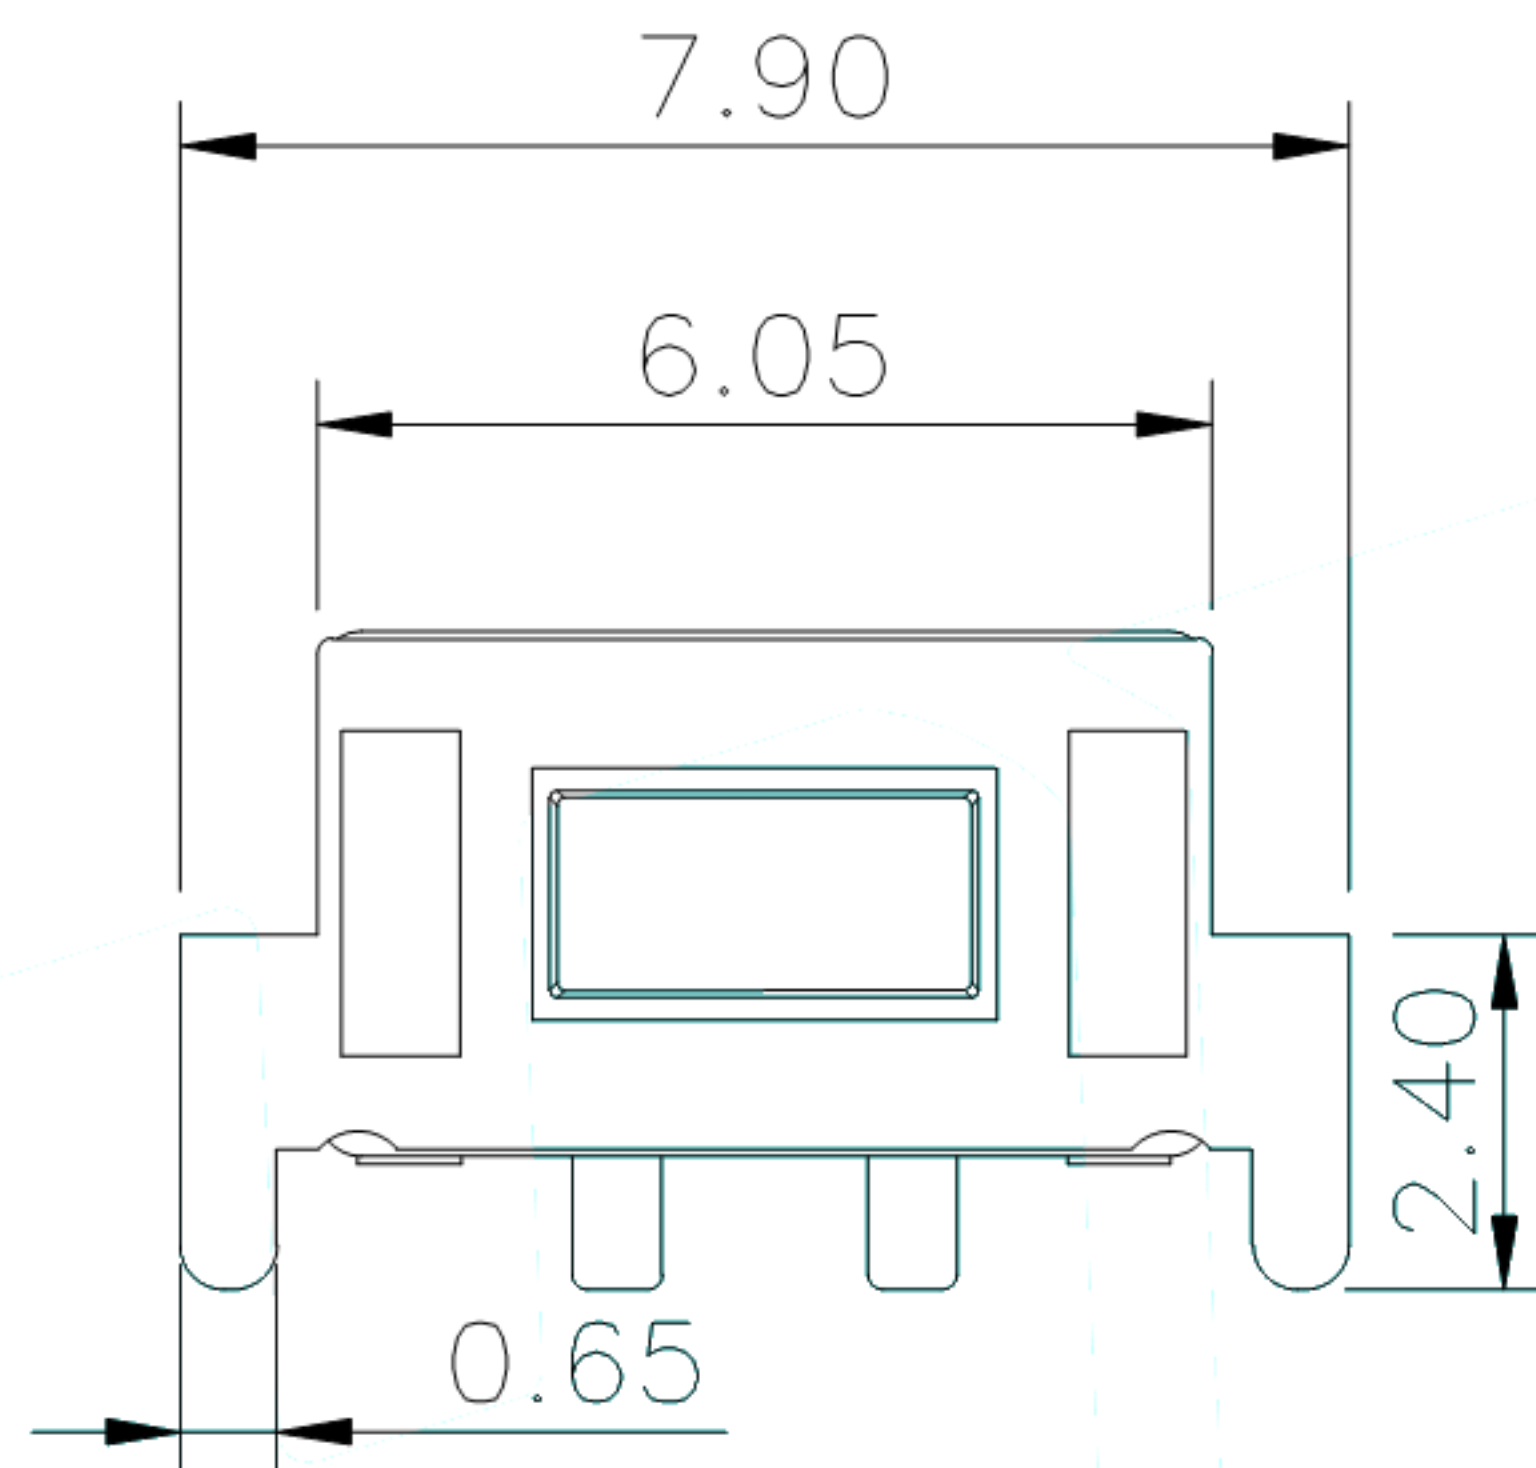
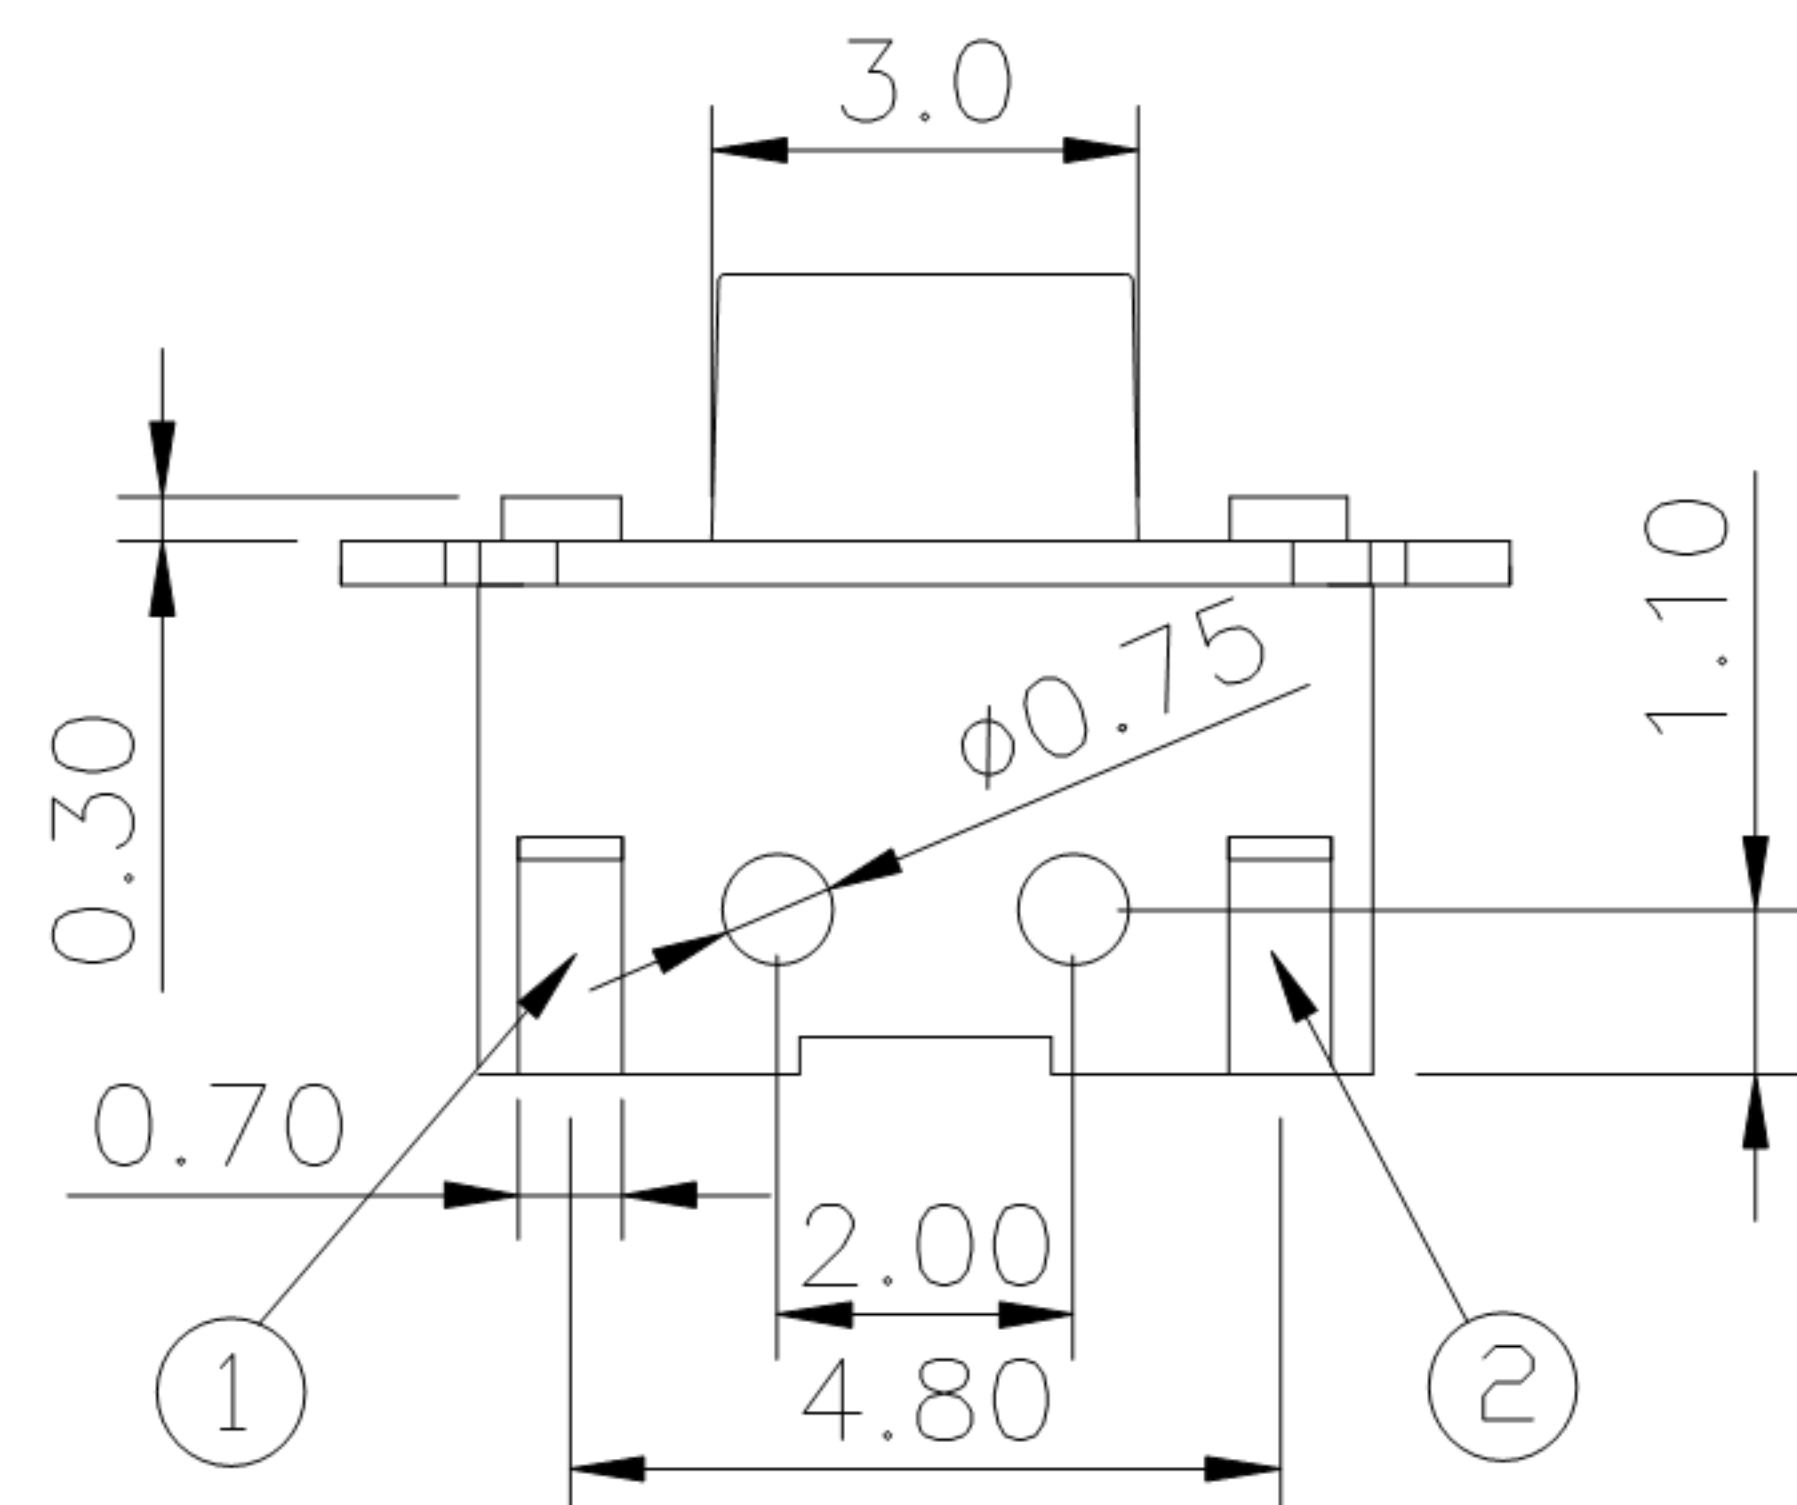
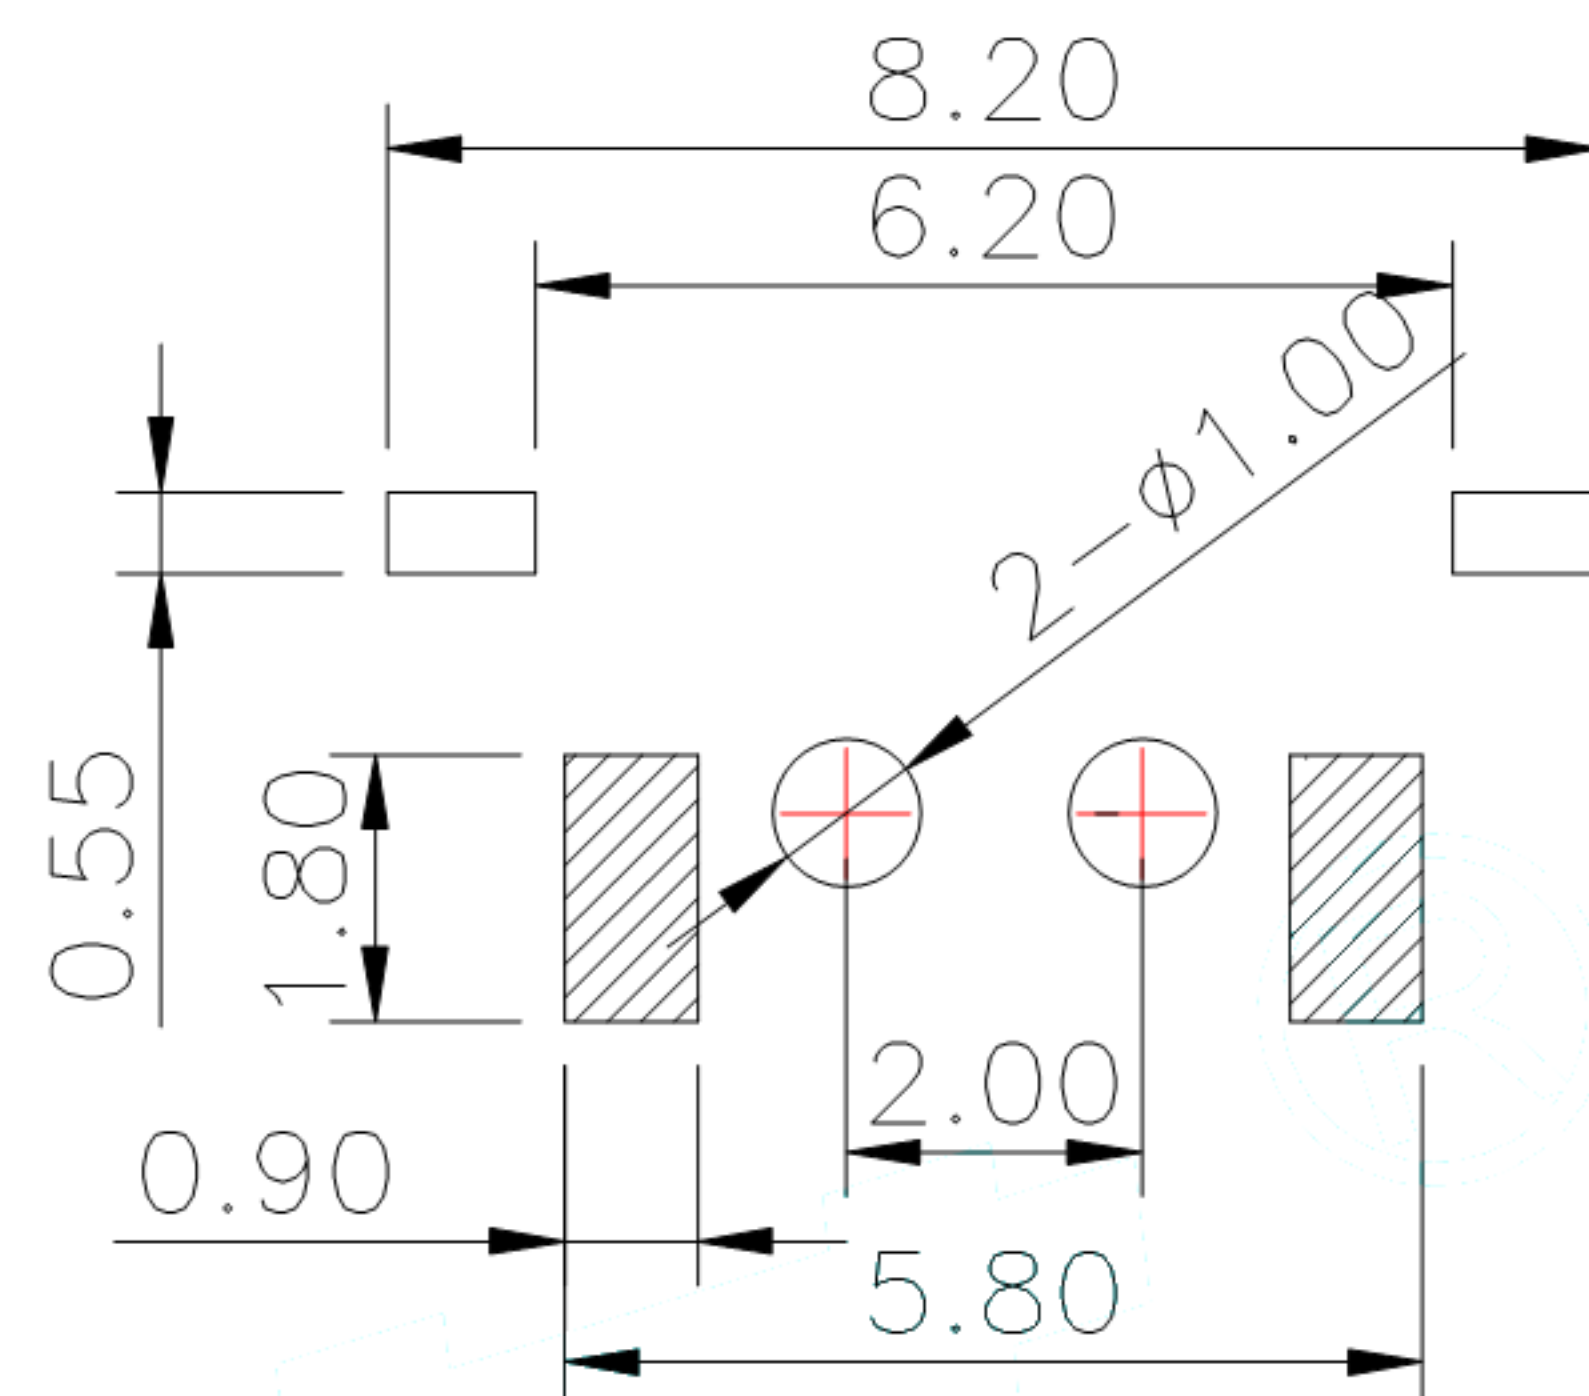


SCHEMATIC

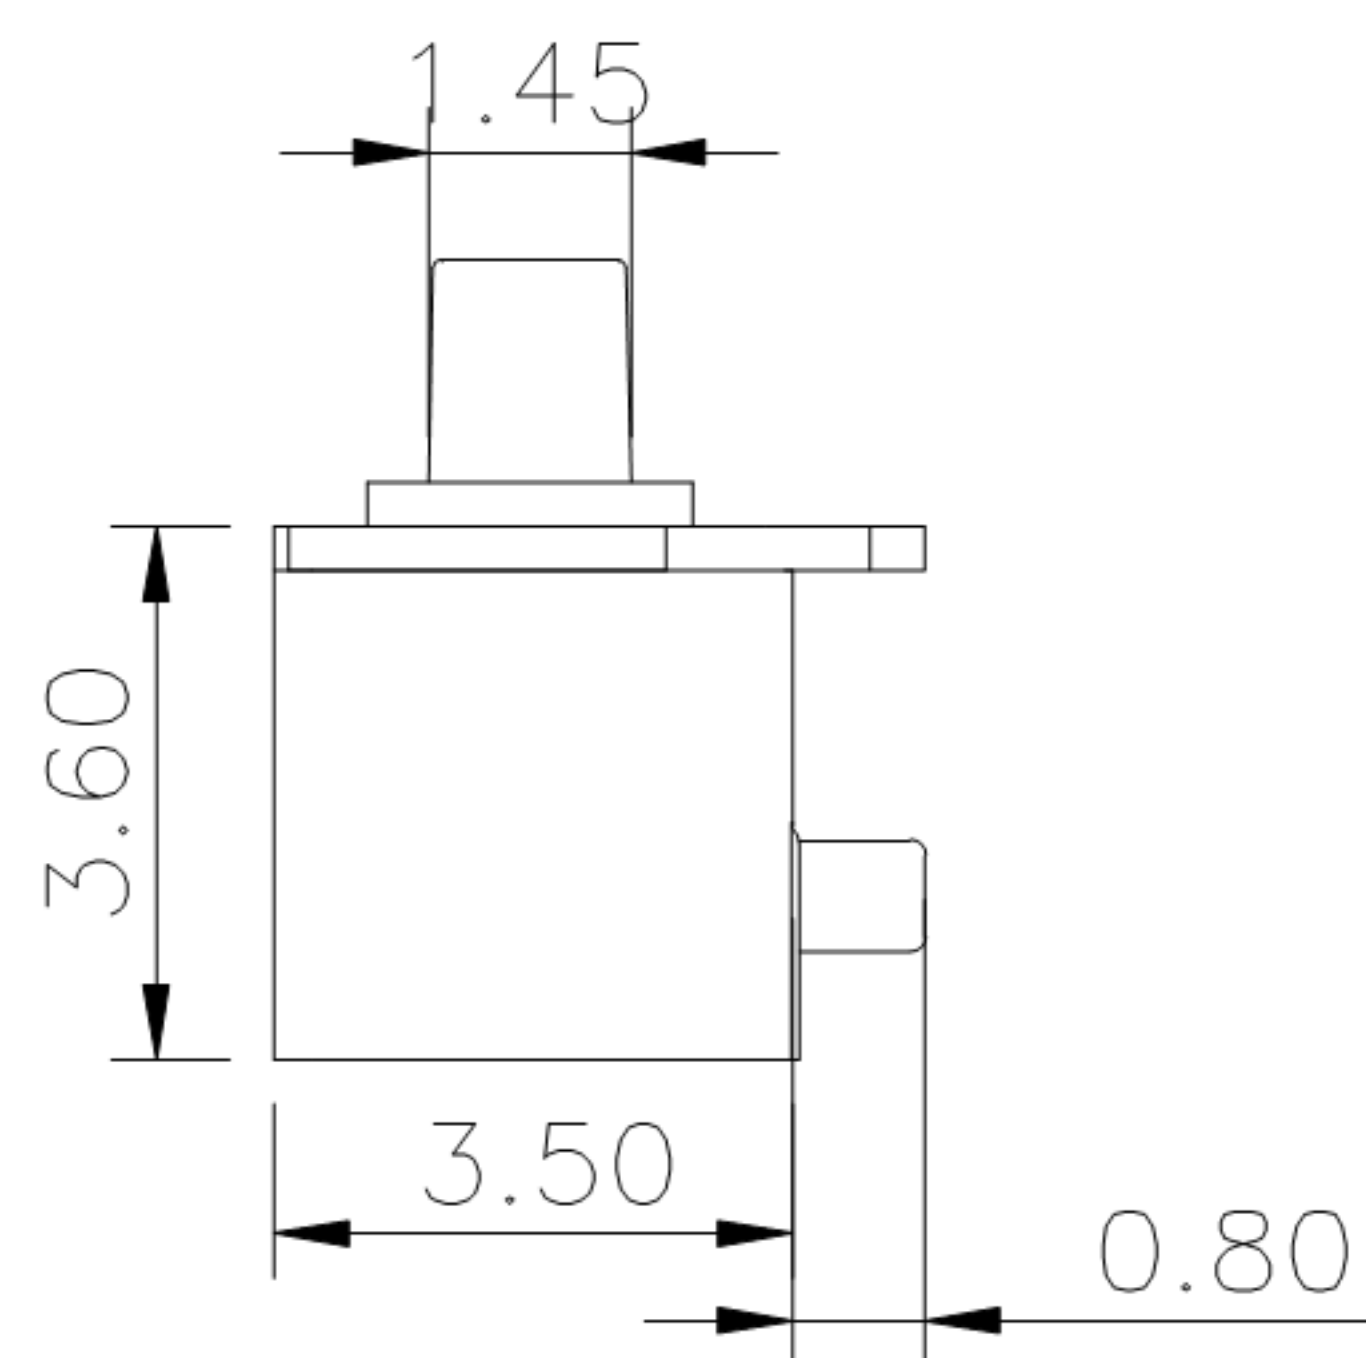

PCB Layout(Pattern side)

NO.1	
PART NO	H
B	4.3
D	5.0
E	6.0
F	6.3

NO.2-NO.3	
PART NO	NOTE
01~99	SERIAL NUMBER

- Typical Specifications
- 1.Rating : DC 12V 50mA
 - 2.Contact Resistance: $\leq 100\text{m}\Omega$
 - 3.Insulation Resistance: $\geq 100\text{m}\Omega$
 - 4.Operating Force: $250\pm 50\text{gf}$
 - 5.Travel: $0.20\pm 0.1\text{mm}$
 - 6.Life : 30,000 Cycles

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.:		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH							