
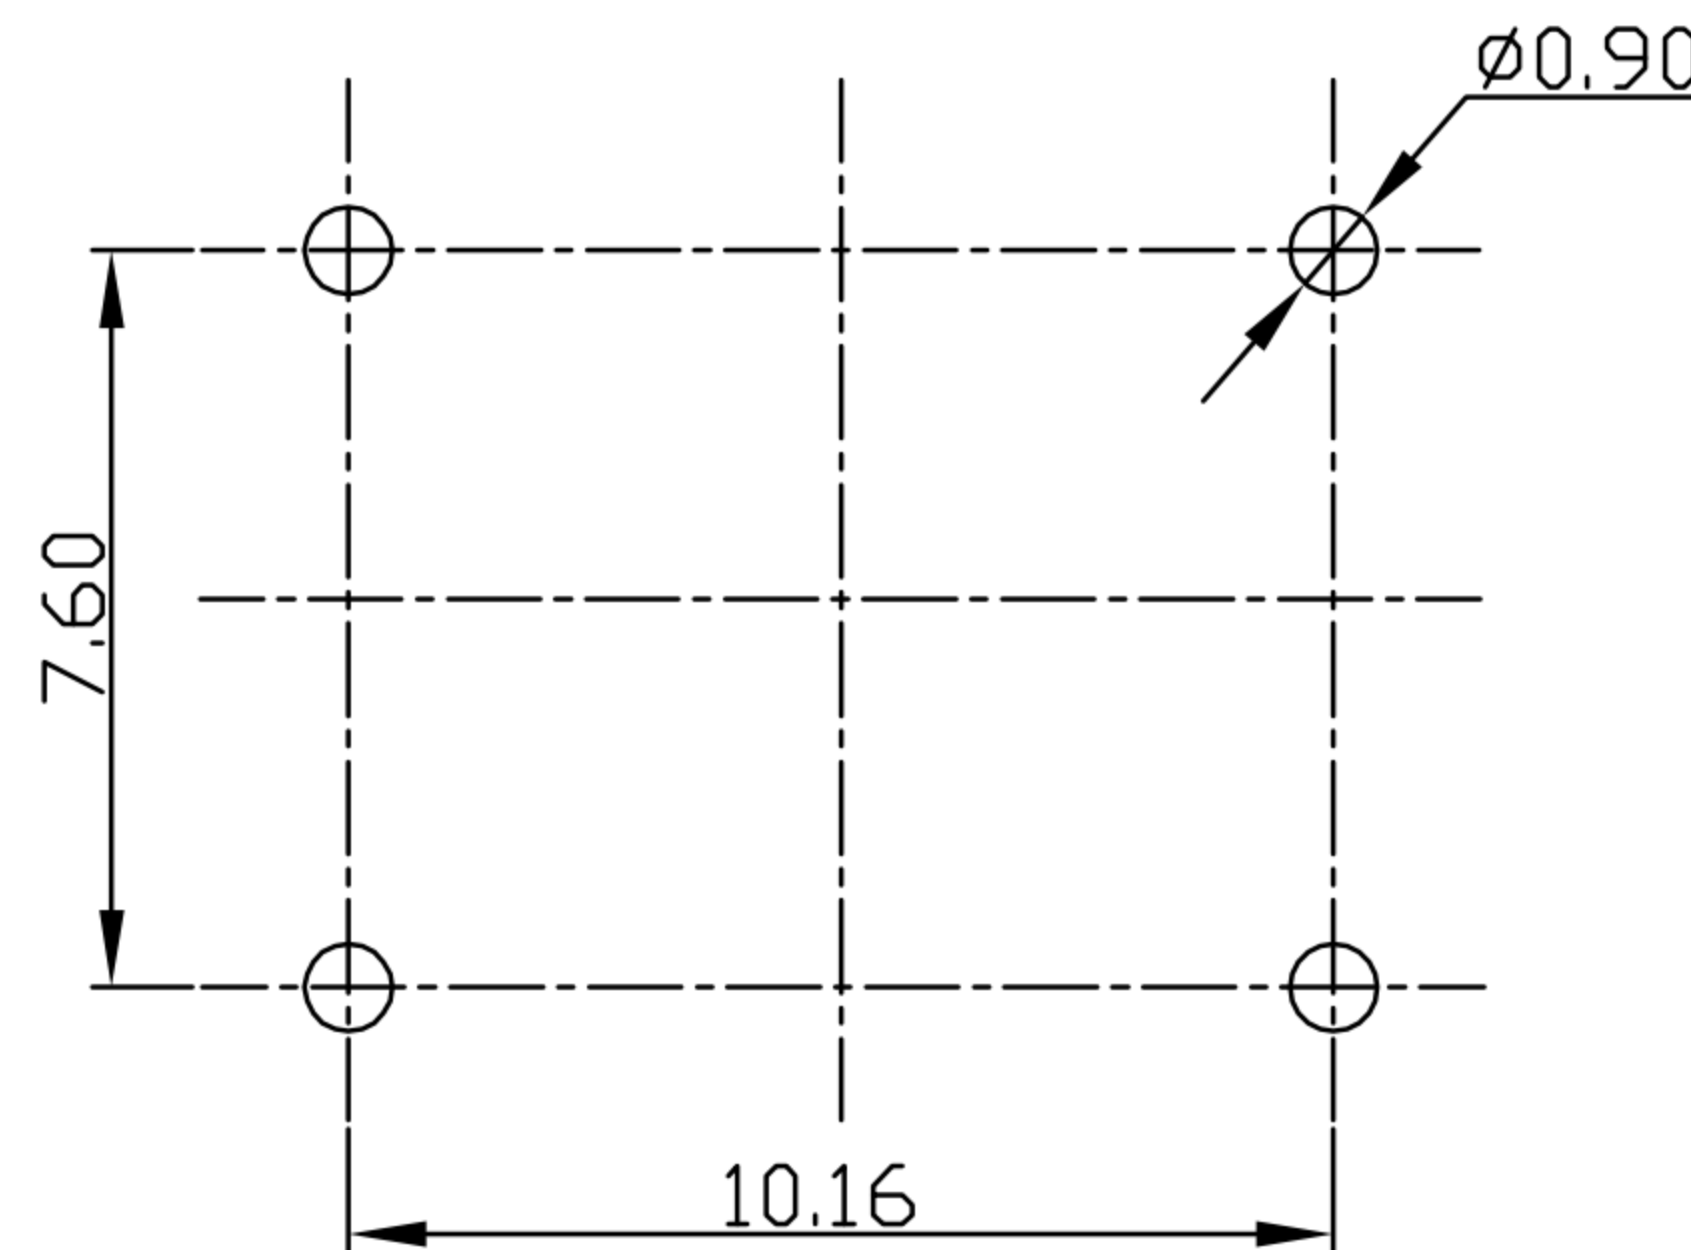
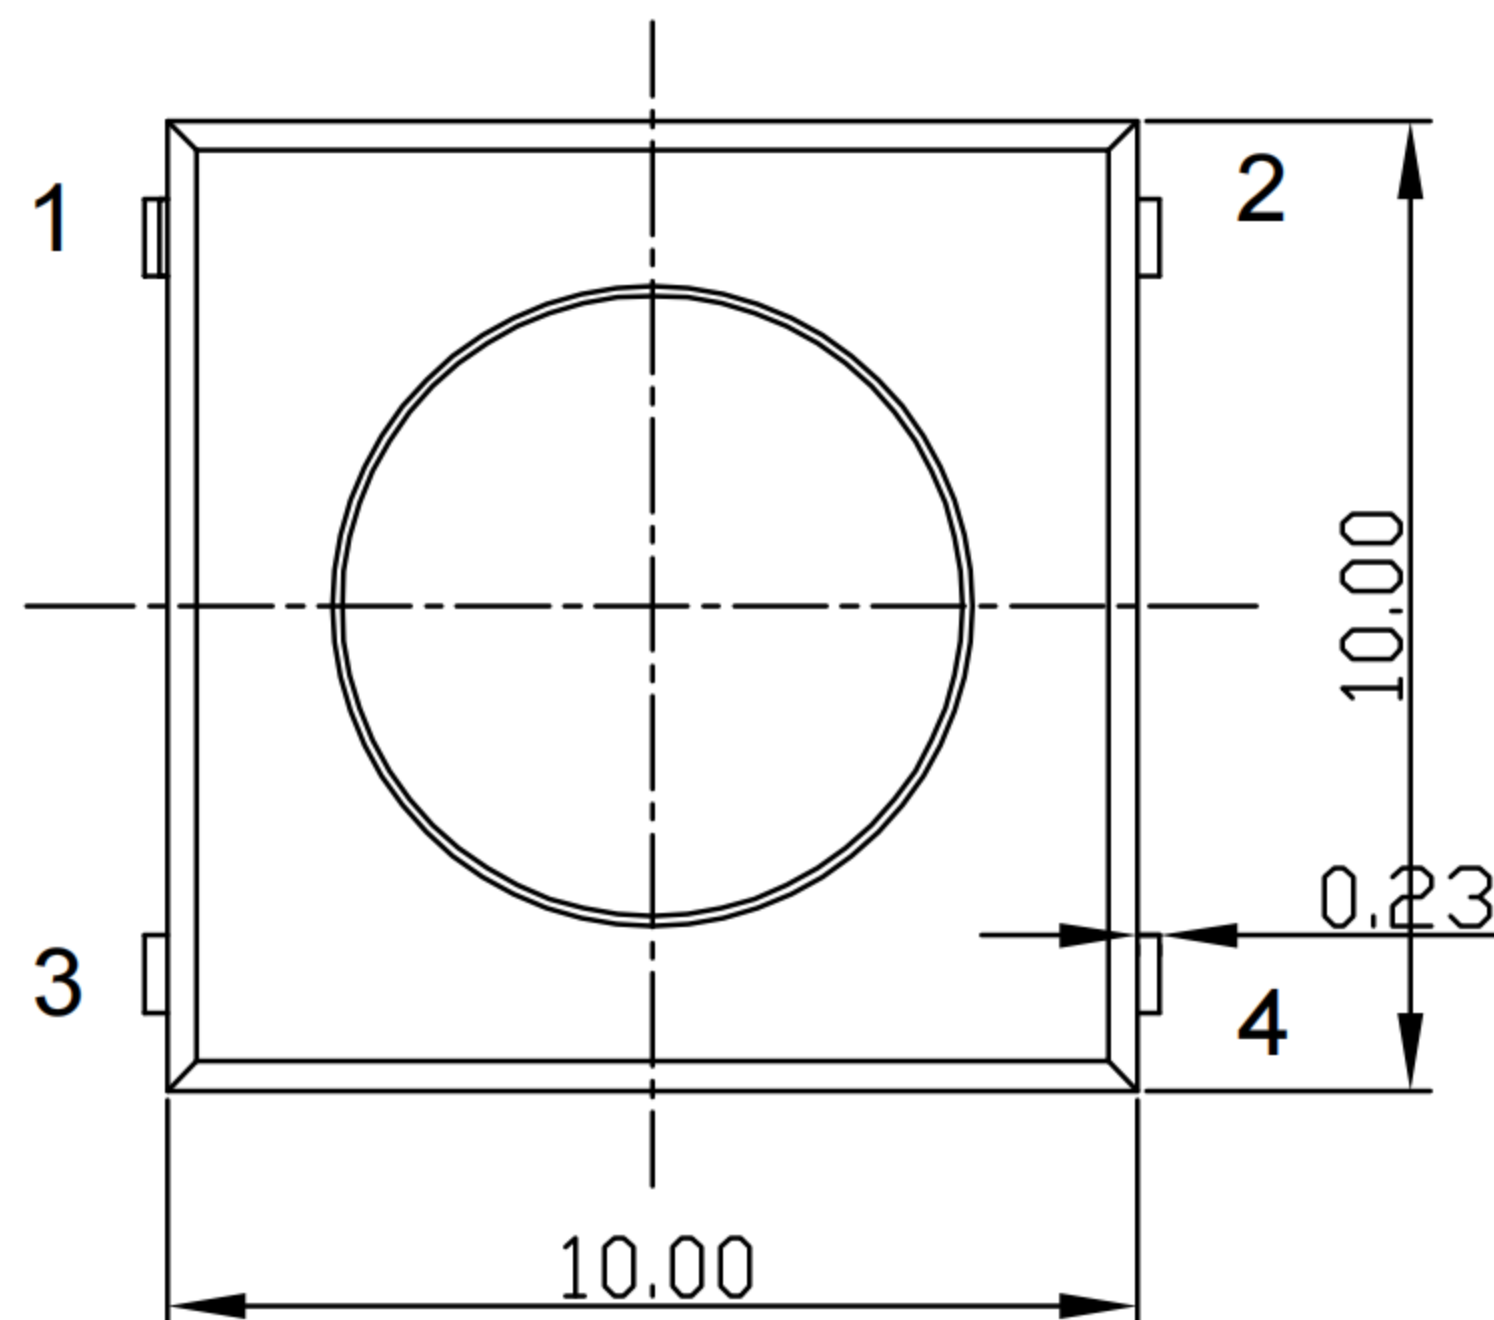
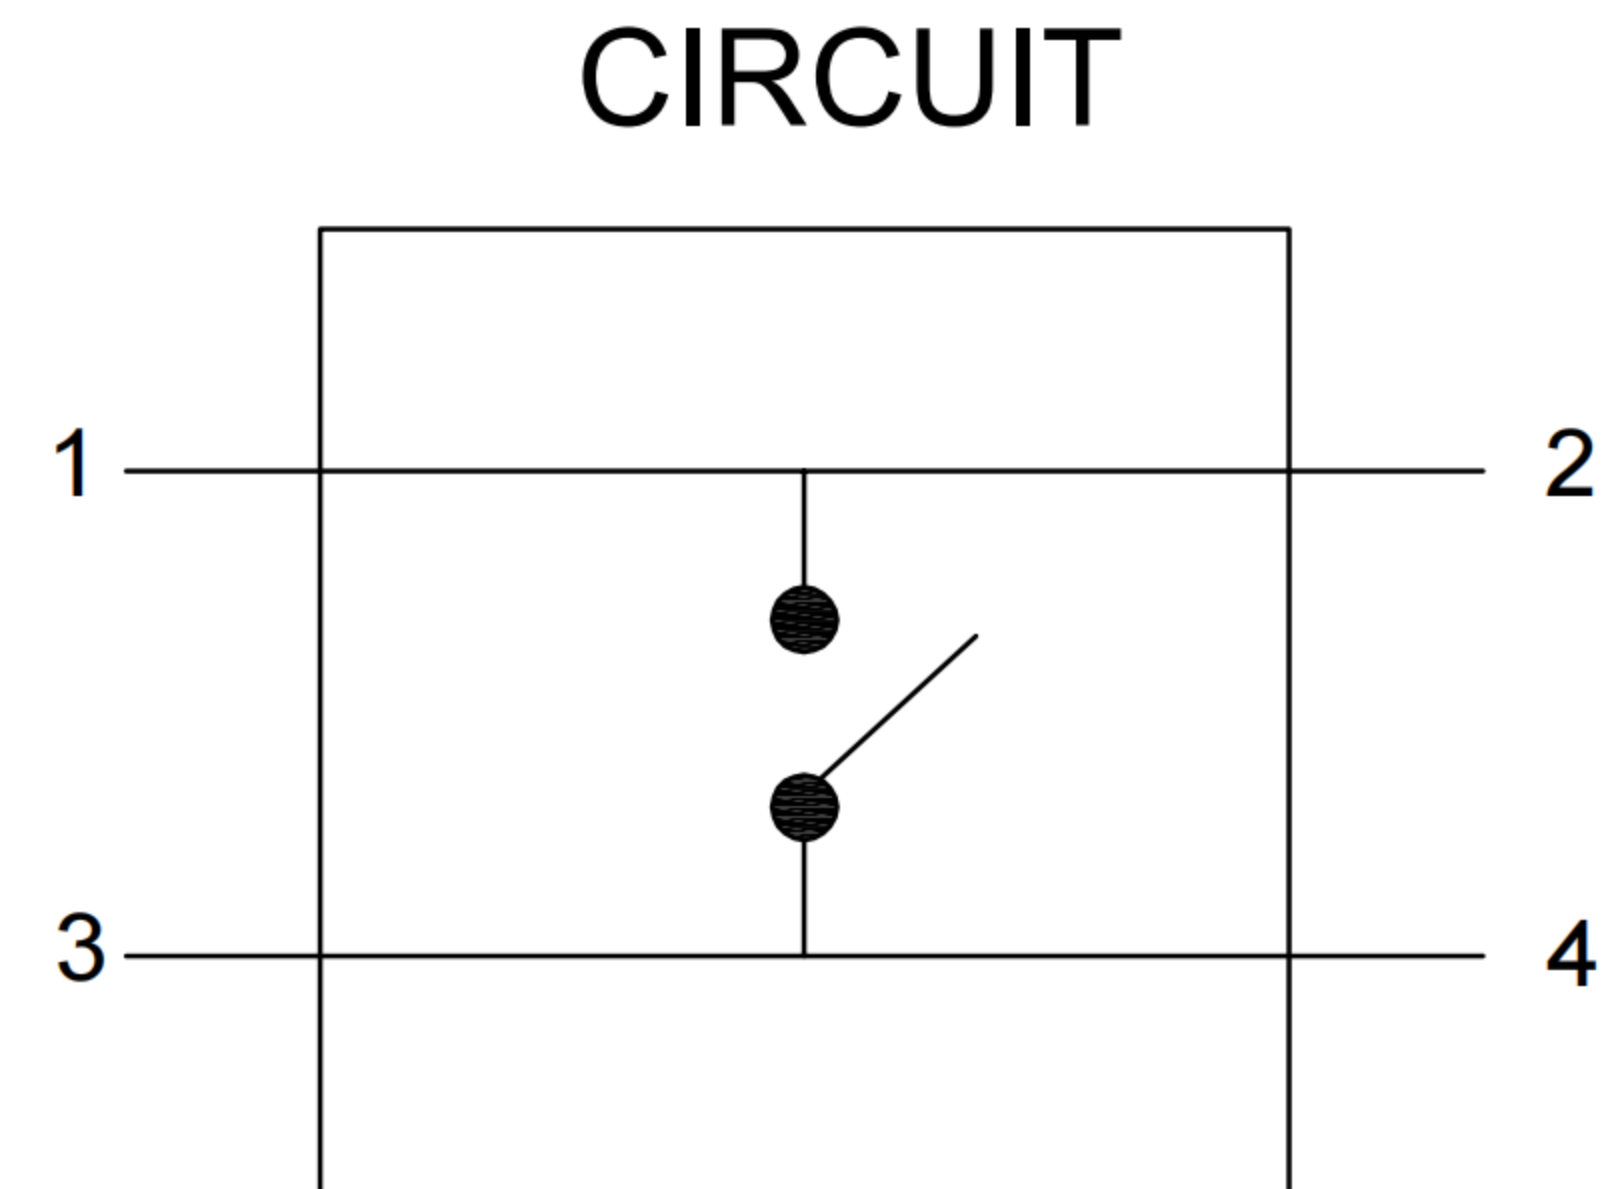
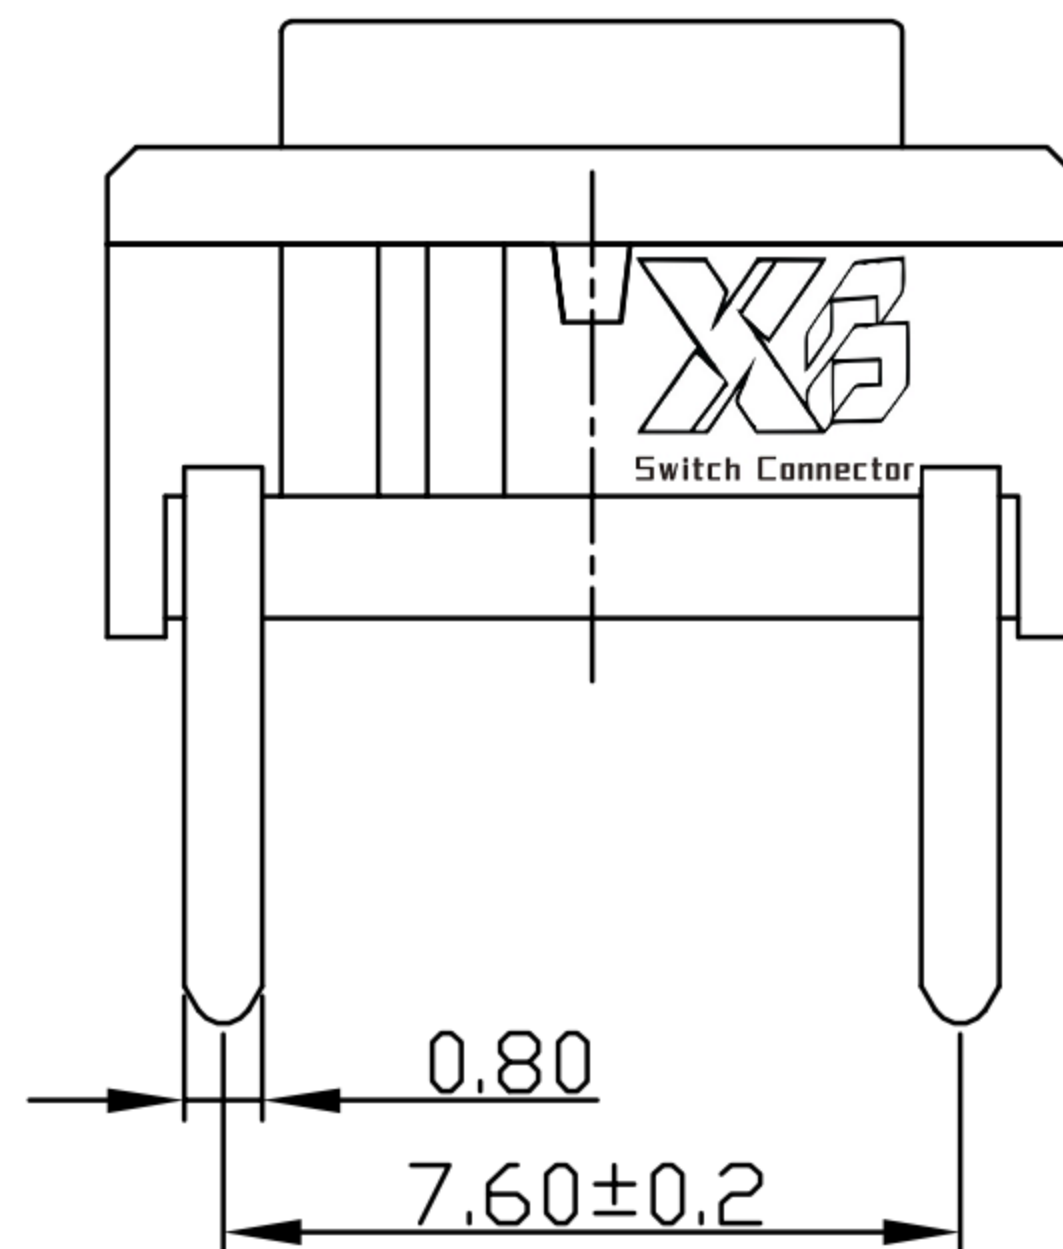


CAD FILE:

ROHS

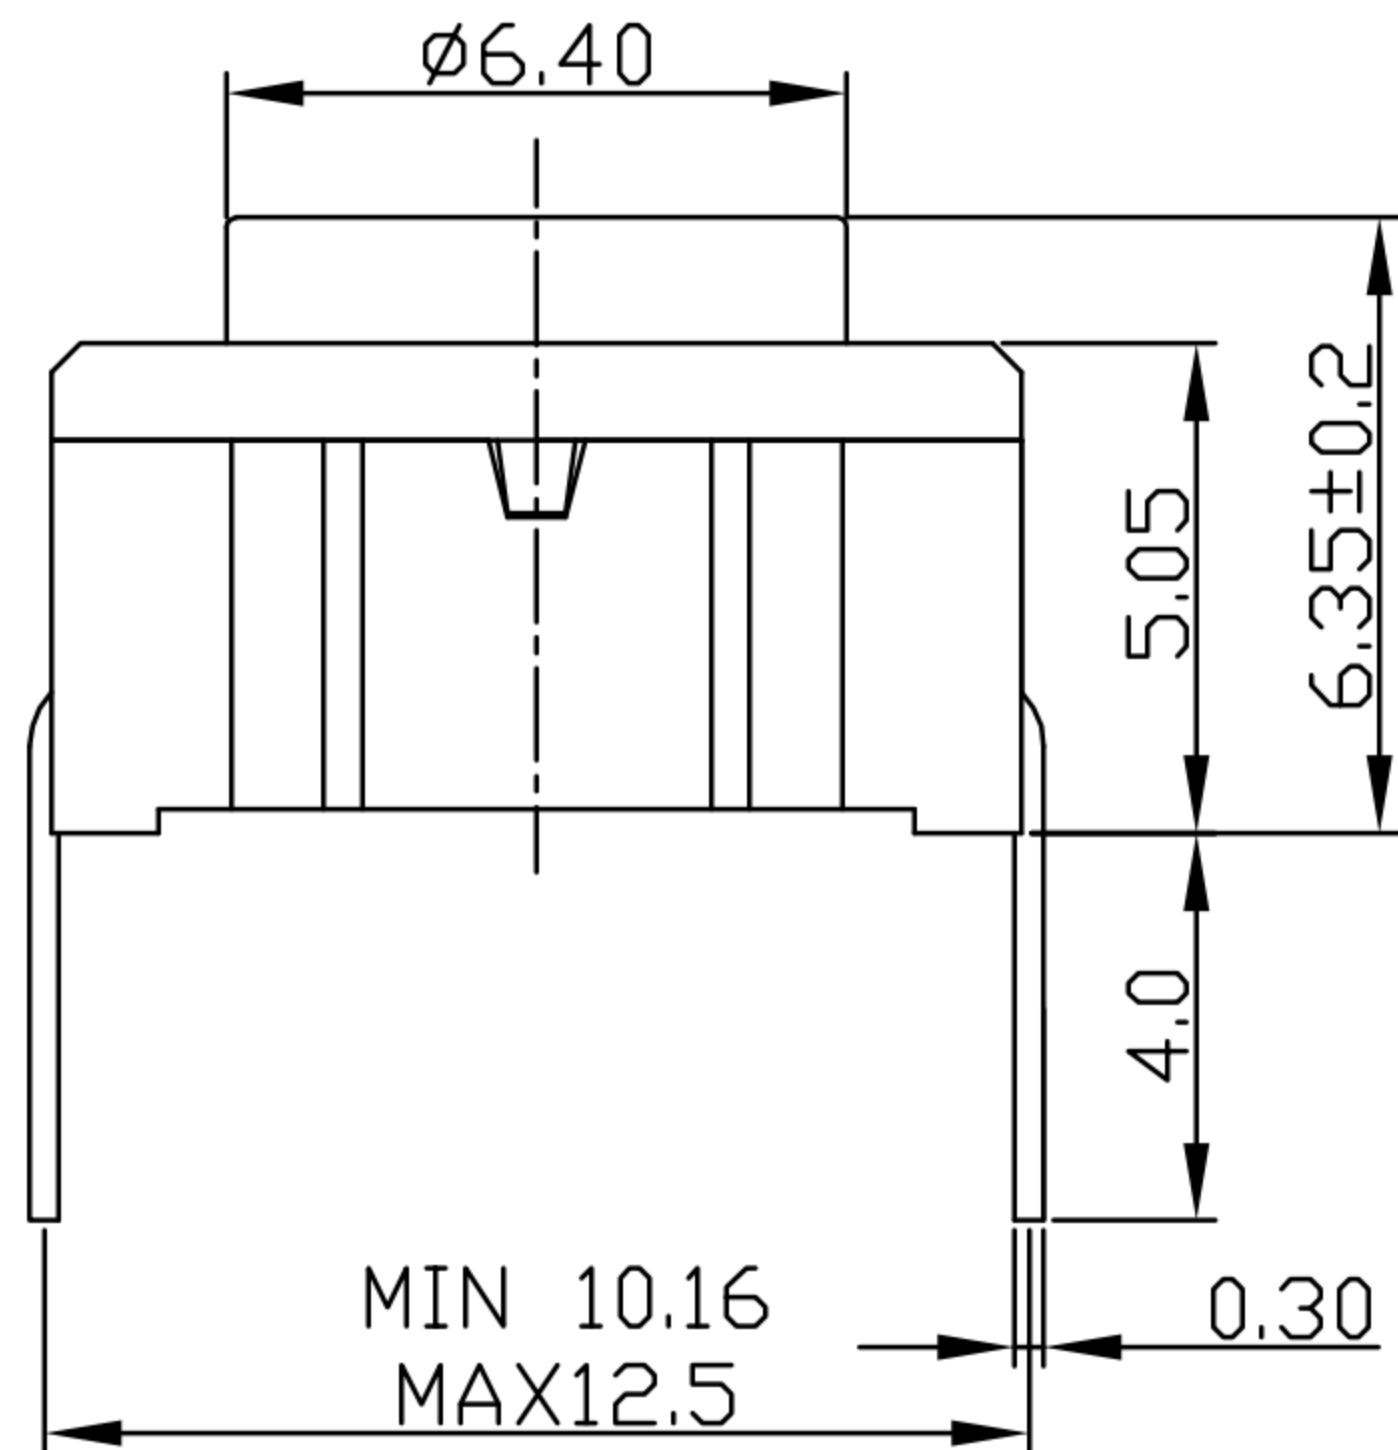

PCB LAYOUT

开关尺寸小巧，防水等级IP67，防油防尘，按键高度和力度有多种选择。

规格说明

Rating: 50mA 24VDC

Electrical Life: 1,000,000 cycles

Contact Resistance: 50 mΩ max

Insulation Resistance: 100MΩ min

Dielectric Strength: AC 250 V for 1 min.

产品应用

安防、仪器、医疗设备、电类产品、电脑周边设备等

产品认证 ROHS REACH

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Tact Switch			UNIT : mm	DRWG NO.:
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					