

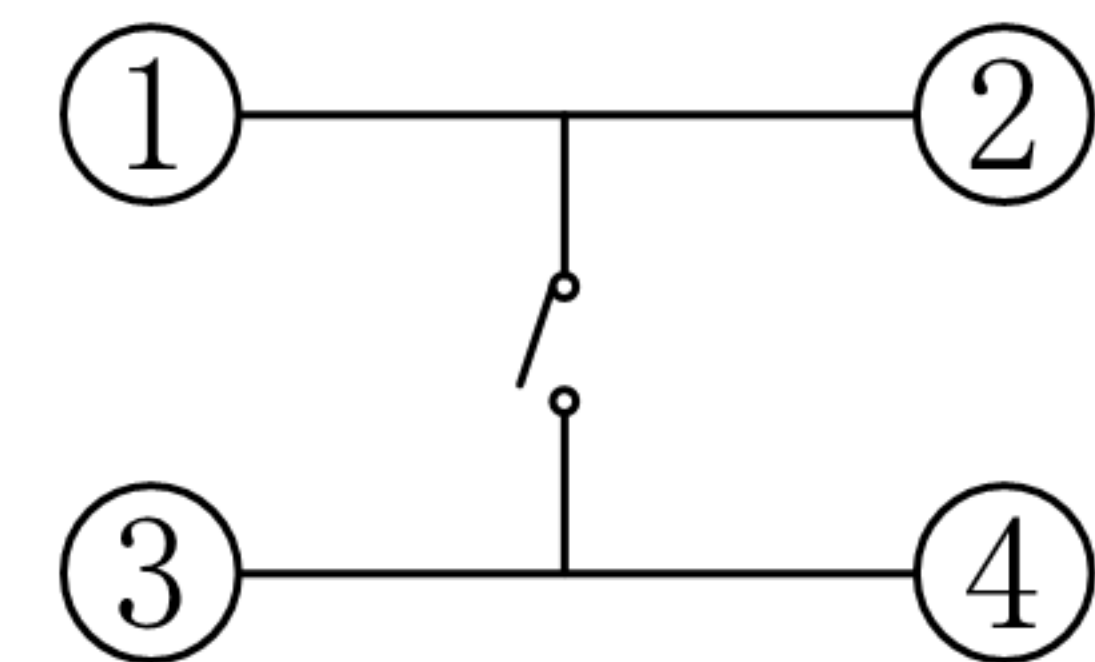
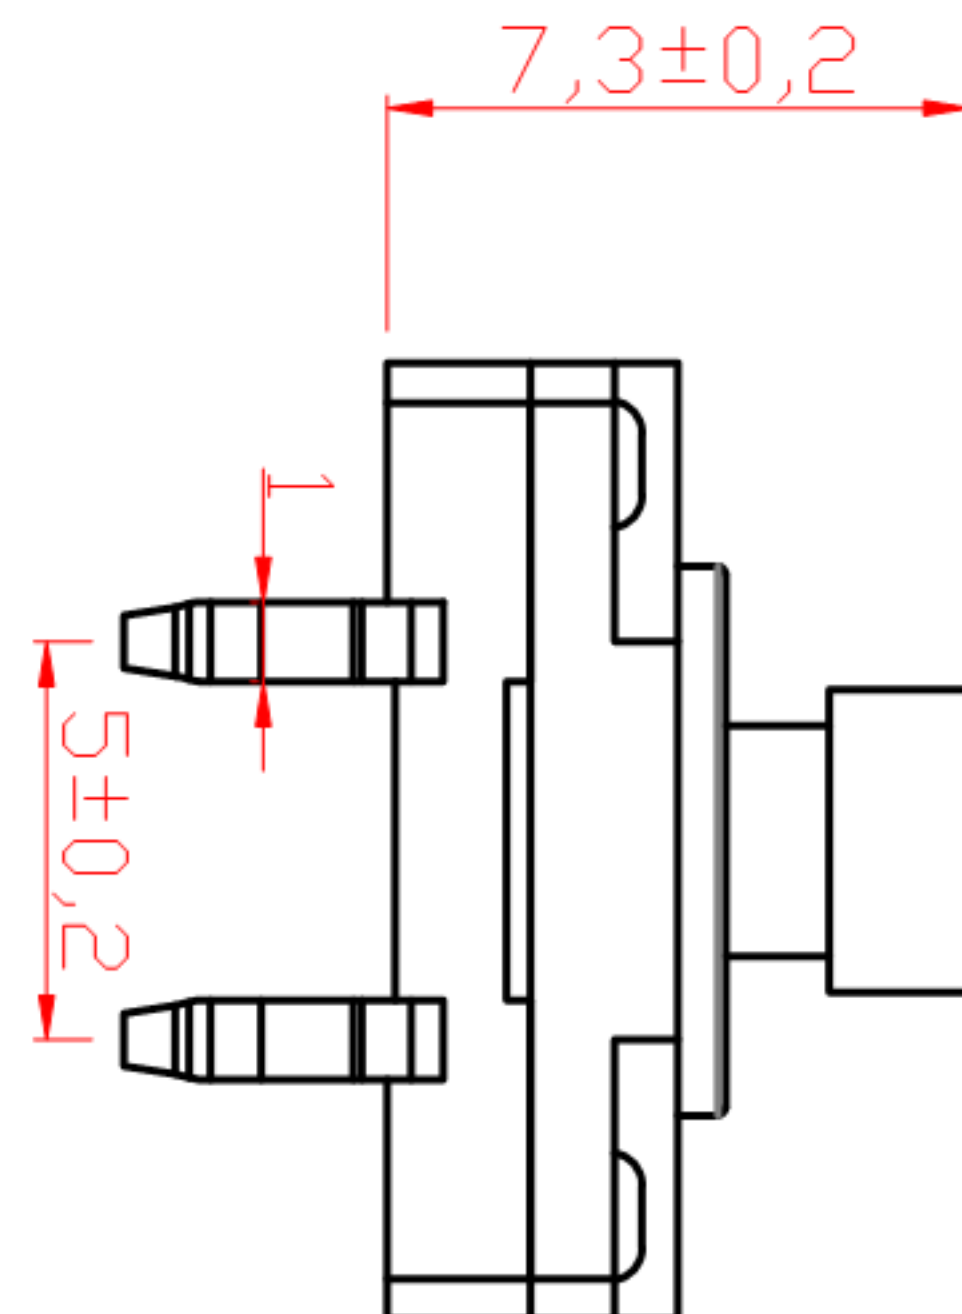
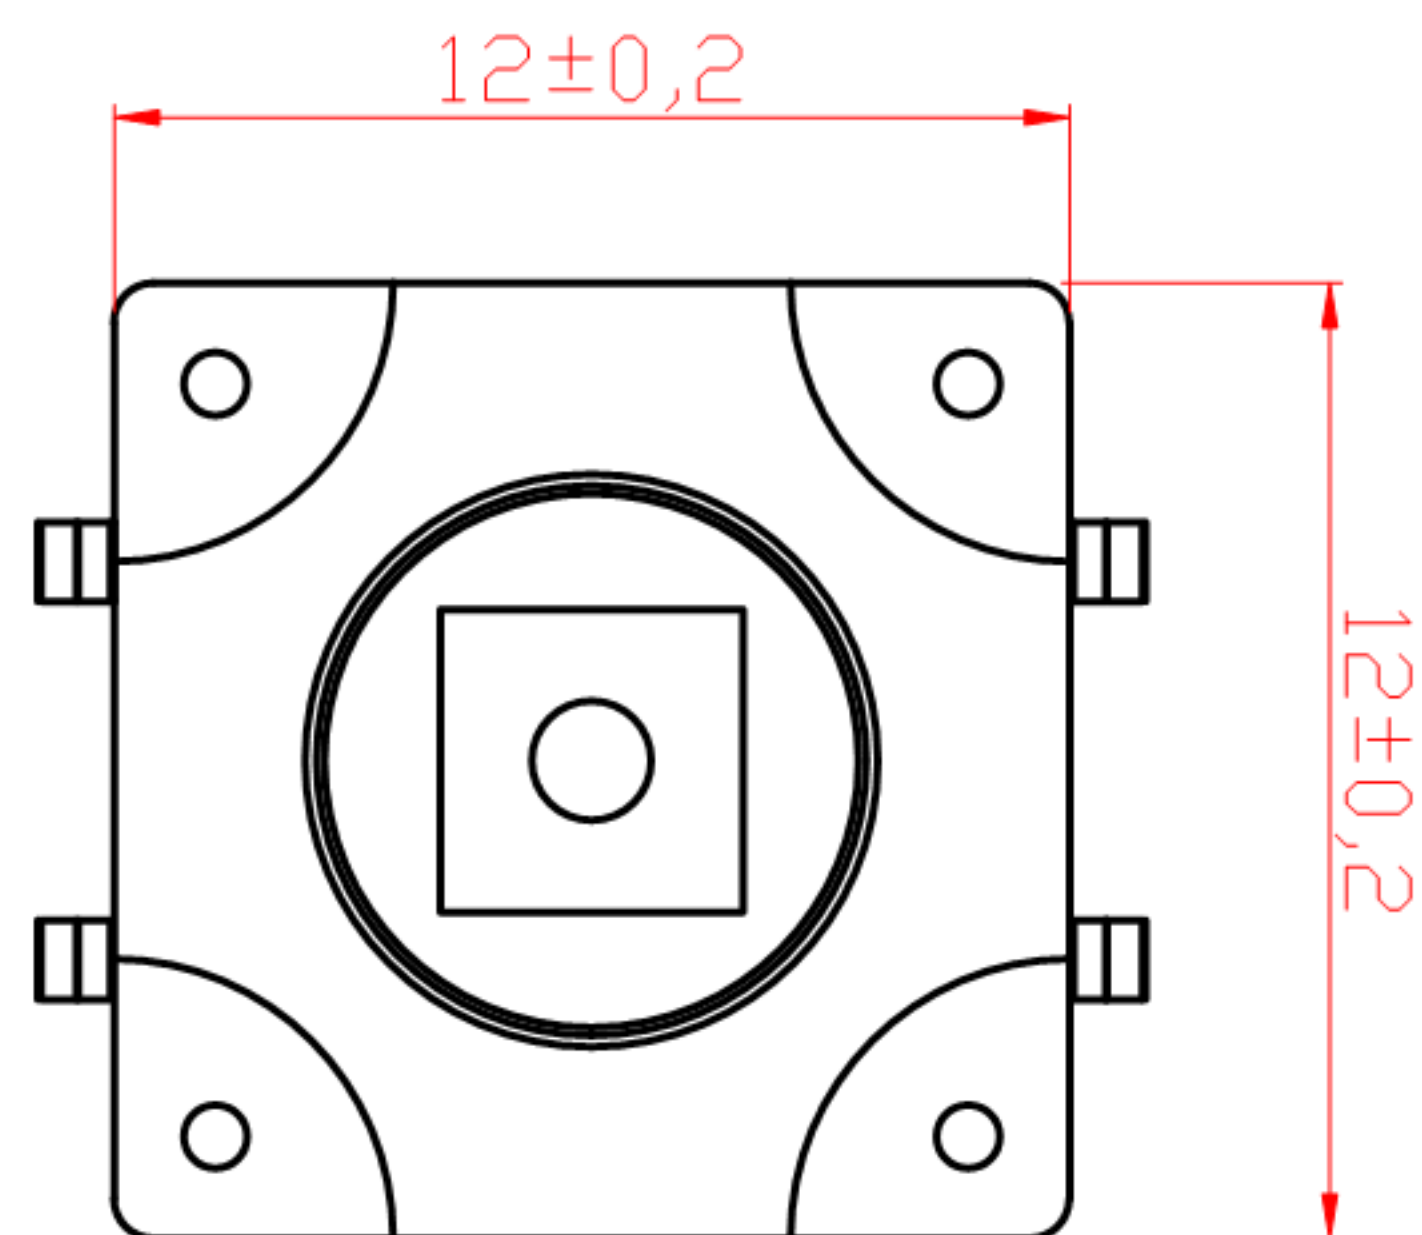
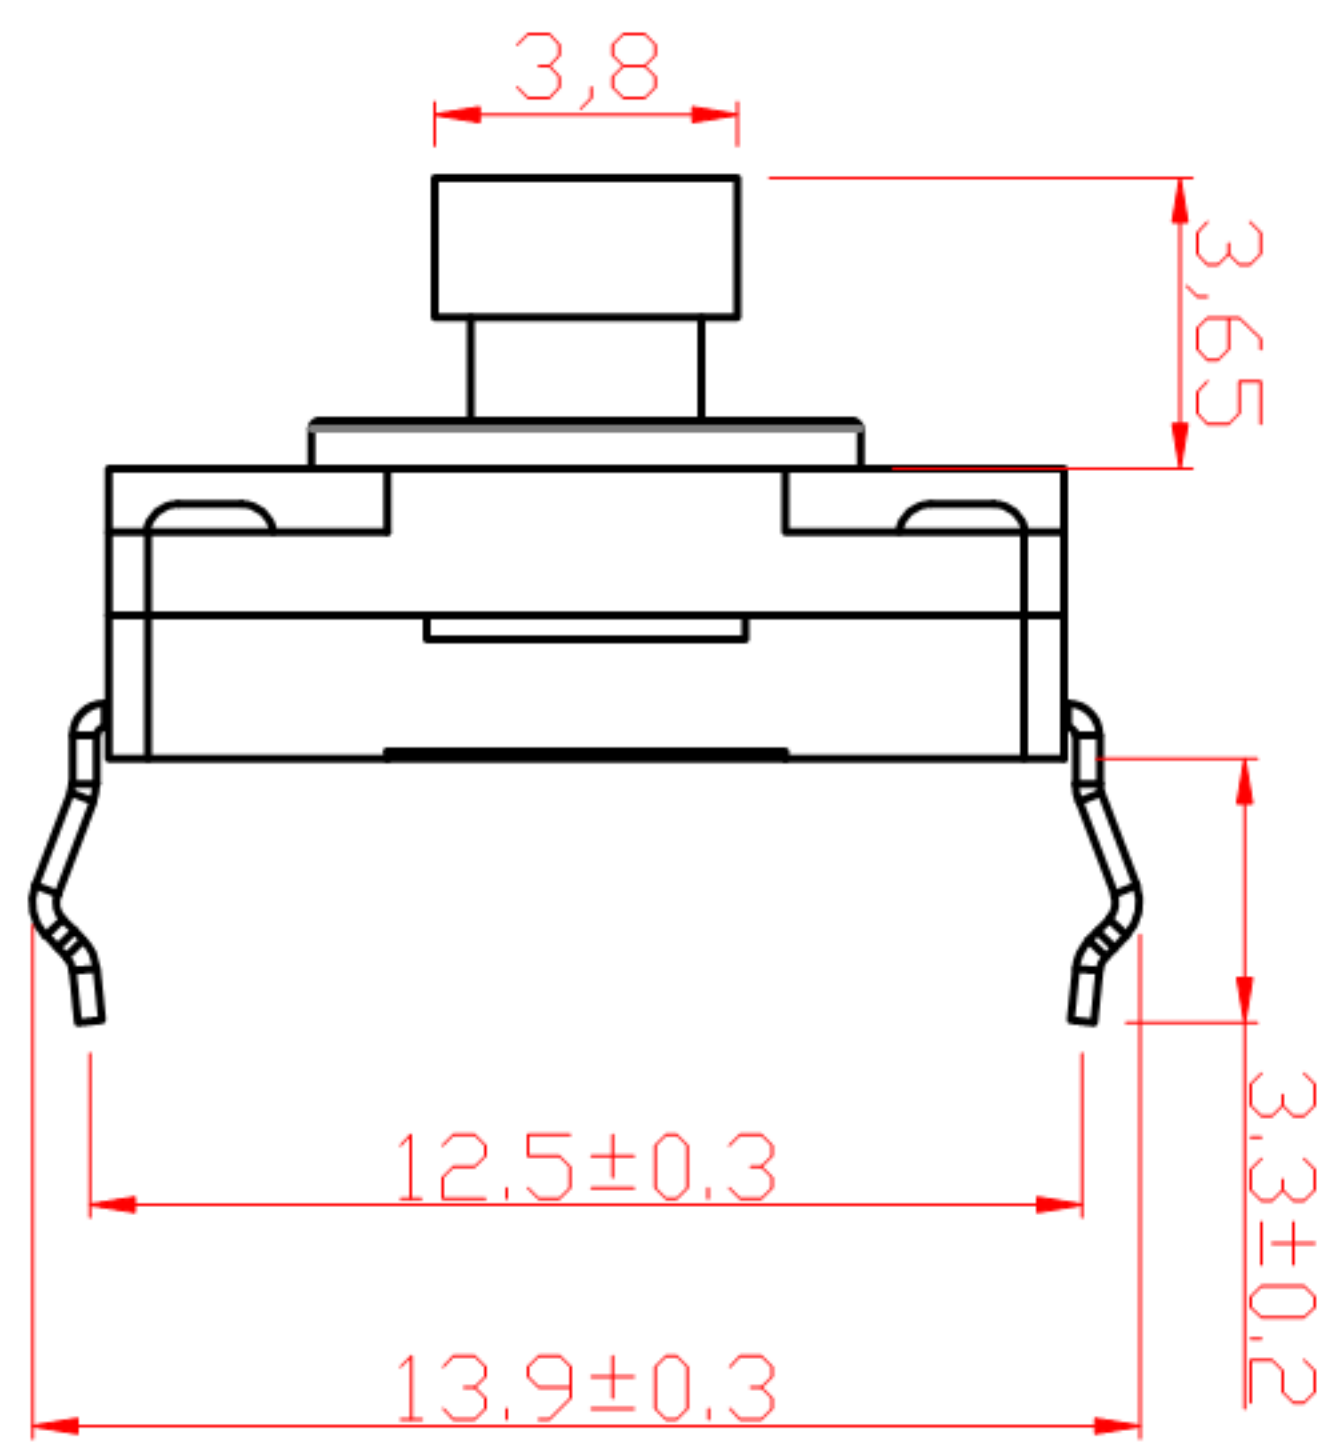
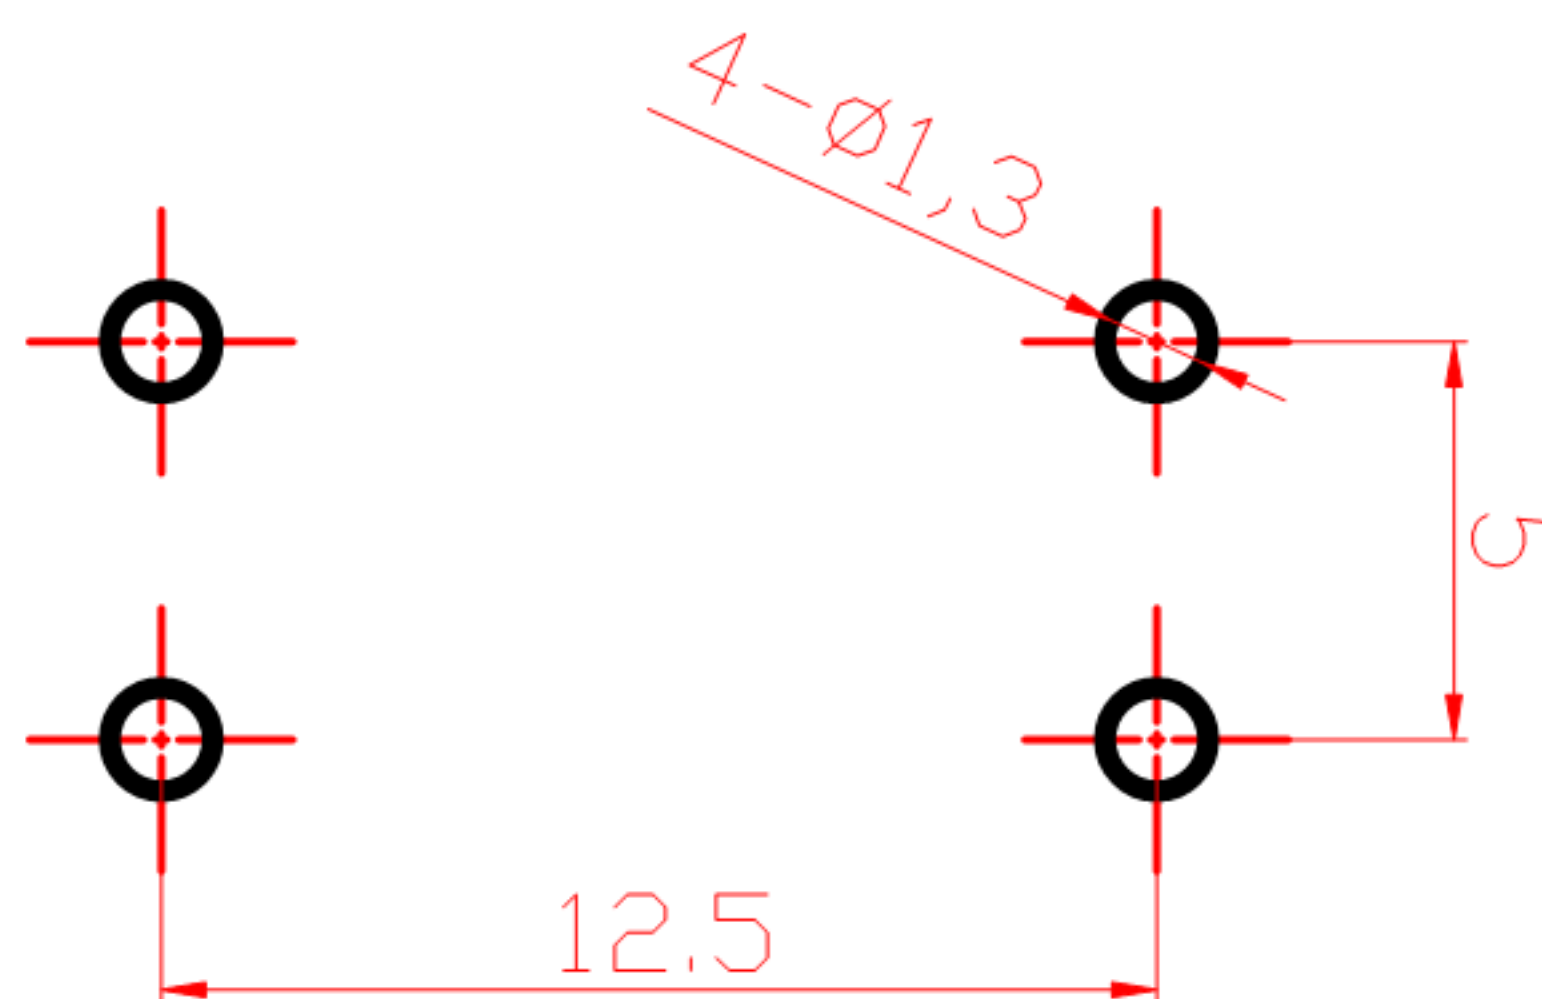


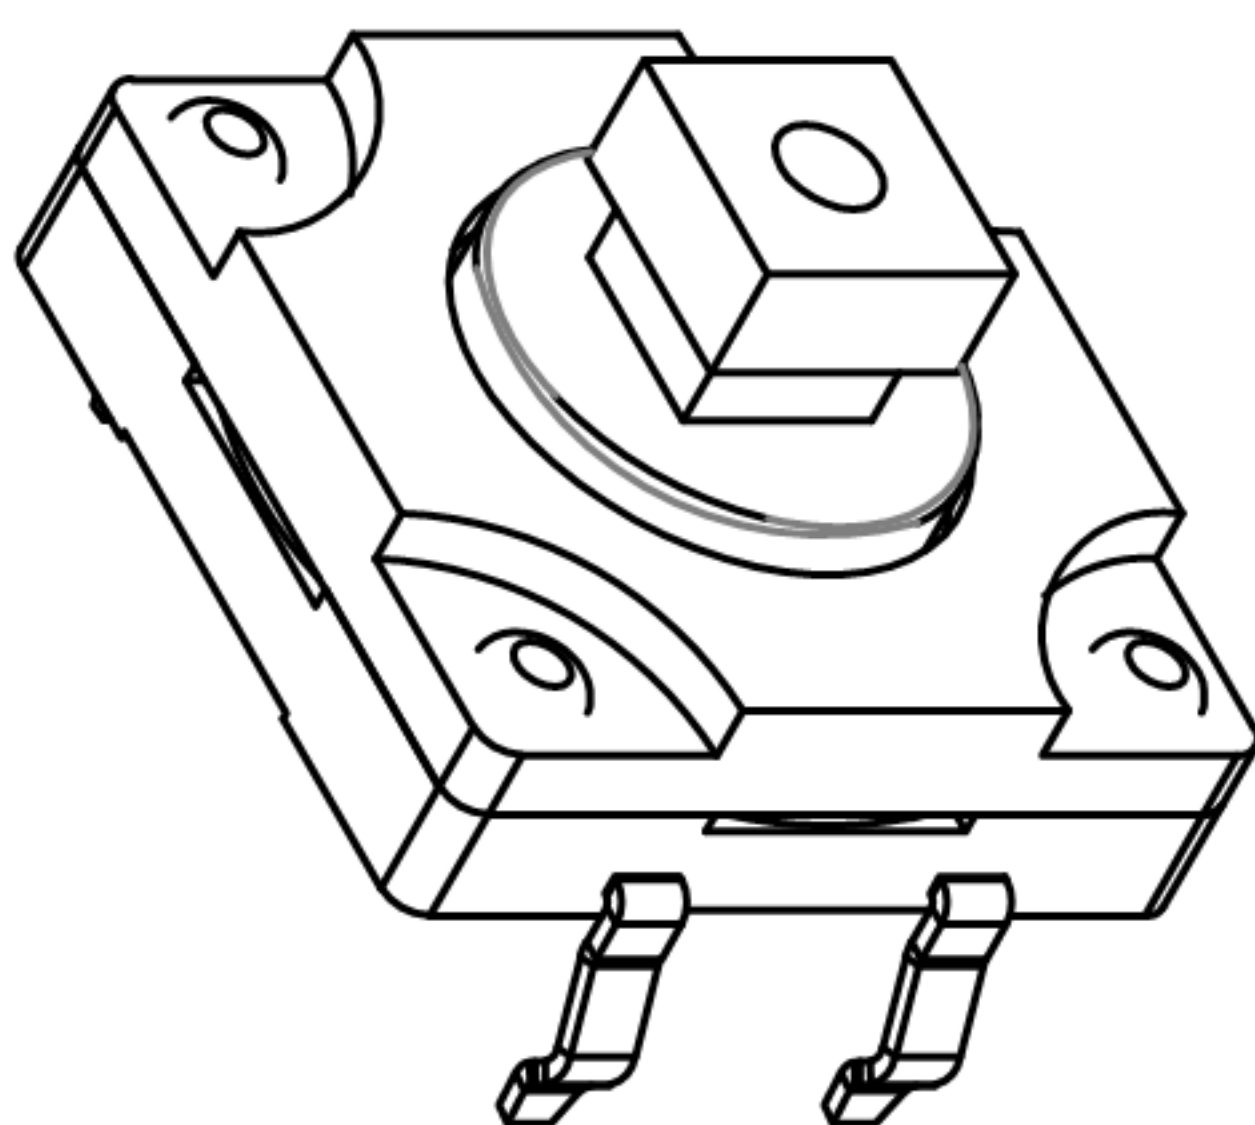

SCHEMATIC

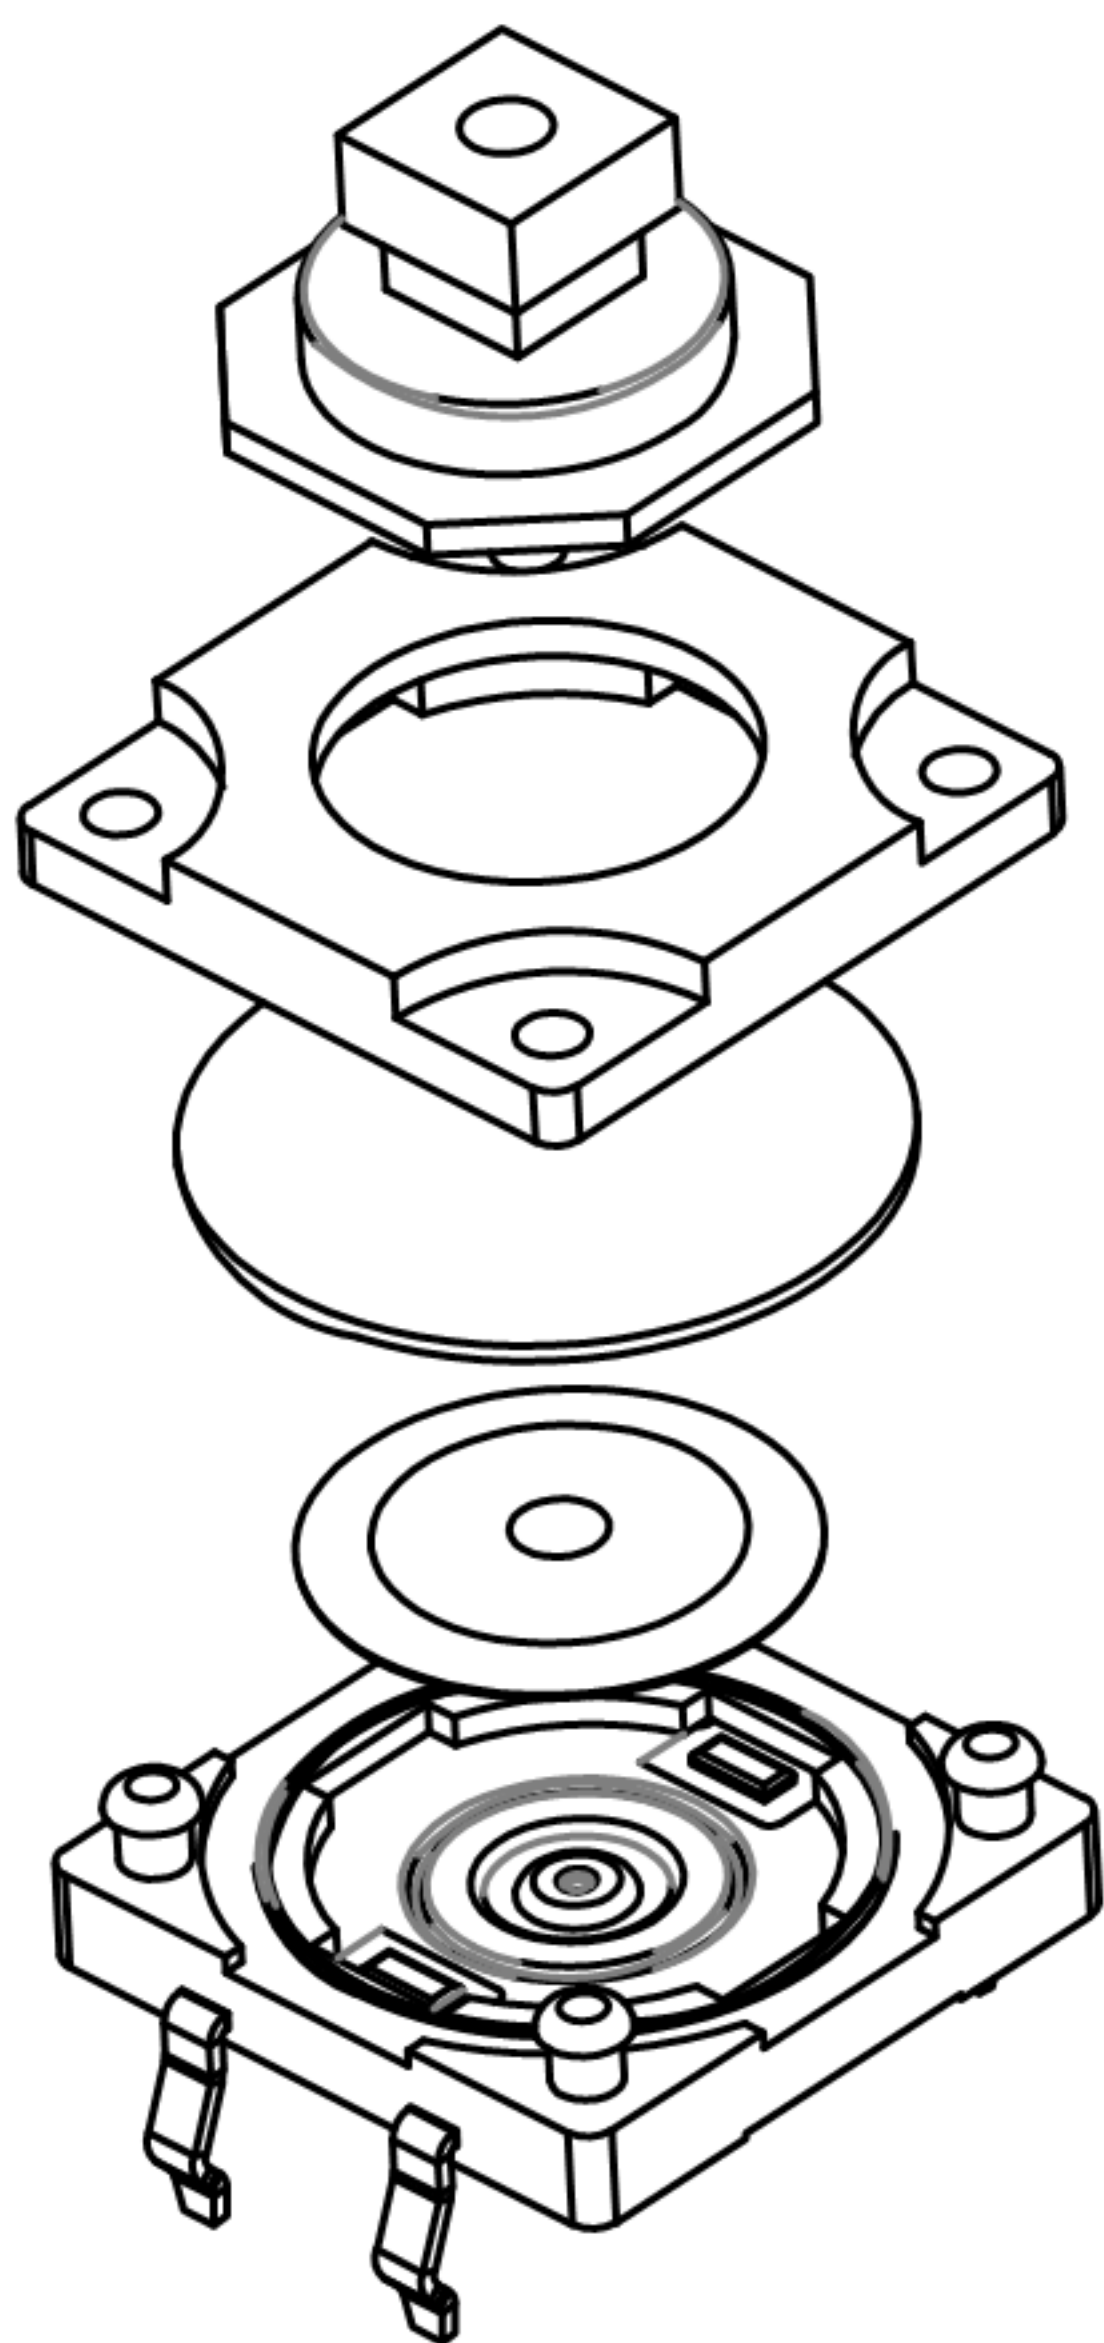

PCB. 焊接图

主要技术规格:

1. 额 定 值: 50mA DC12V
2. 接触电阻: ≤50m Ω
3. 操 作 力: 250±40gf
4. 行 程: 0.45±0.1mm
5. 绝缘电阻: ≥100M Ω
6. 抗电强度: 250V 50HZ 1Min.
7. 寿 命: 100,000 Cycles
8. 防水等级: IP67
9. 防银迁移: 60V, 85℃, 90%RH/60H

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-FS12-FX		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG		2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN		2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH							