
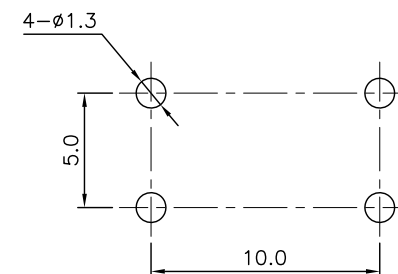
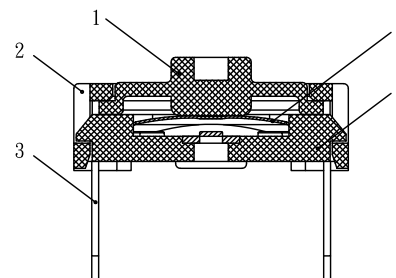
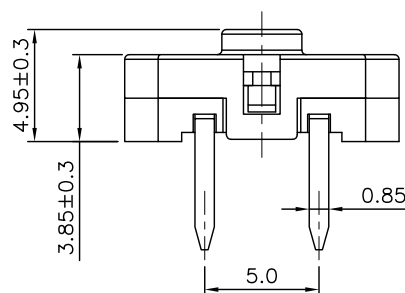
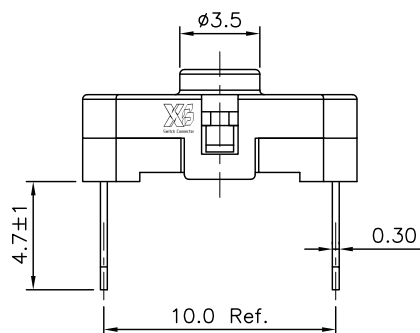
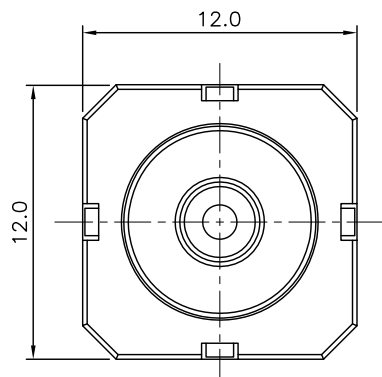


ABIDE BY ROHS



REV	DESCRIPTION	DRW	DATE
A/0	FIRST ISSUE	D X. Zhang	2016-04-27

NOTES:

- 1.RATING: 12VDC 50mA.
- 2.CONTACT RESISTANCE: 100mΩ Max.(Initial)
- 3.INSULATION RESISTANCE: 100MΩ (at 500VDC)
- 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MINUTE.
- 5.OPERATING LIFE:1,000,000 CYCLES MIN.
- 7.OPERATION FORCE:350±100gf.
- 8.TRAVEL: 0.7±0.3mm.
- 9.OPERATING TEMPERATURE: -20°C to 70°C.



P.C.B.LAYOUT

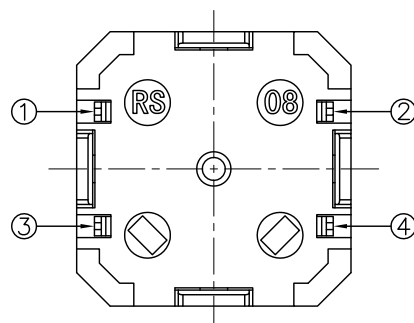


CIRCUIT

NO.	PART NAME	MATERIAL	QTY.	FINISHING
1	BUTTON	SILICONE RUBBER	1	WHITE
2	COVER	PA	1	BLACK
3	TERMINAL	H65 (C2680)	4	Ag PLATED
4	CONTACT	STAINLESS STEEL METAL	1	Ag PLATED
5	BASE	PA	1	BLACK



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE				DRAWN	DATE	TITLE	TACT SWITCH	
UNLESS OTHERWISE STATED				<i>D X. Zhang</i>	2016. 04. 27	MODEL	TD12C-1-S(350g直脚)	
X.X	±0.25		±1°	CHK'D	DATE	MATERIAL		
X.XX	±0.15	UNIT	mm	<i>XH. Ou</i>	2016. 04. 27			
REV.	A/0	SCALE	3:1	APPV'D	DATE	FINISH		
SIZE	A4	SHEET	1 OF 1	<i>S.L. Yang</i>	2016. 04. 27			