

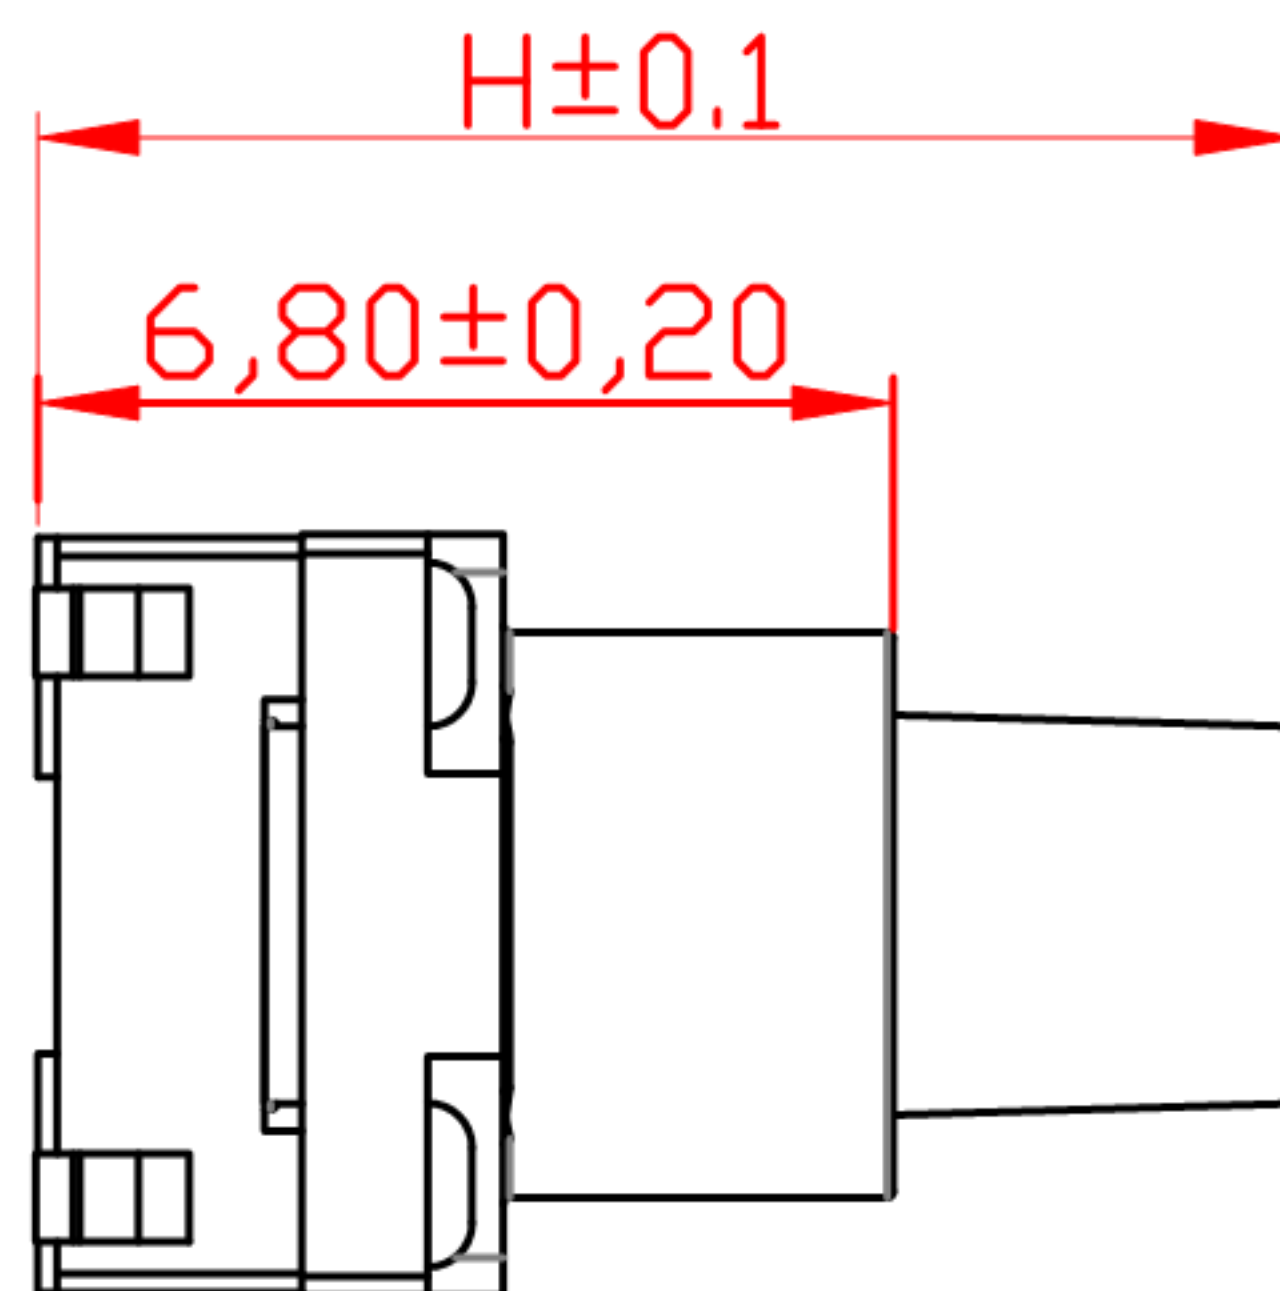
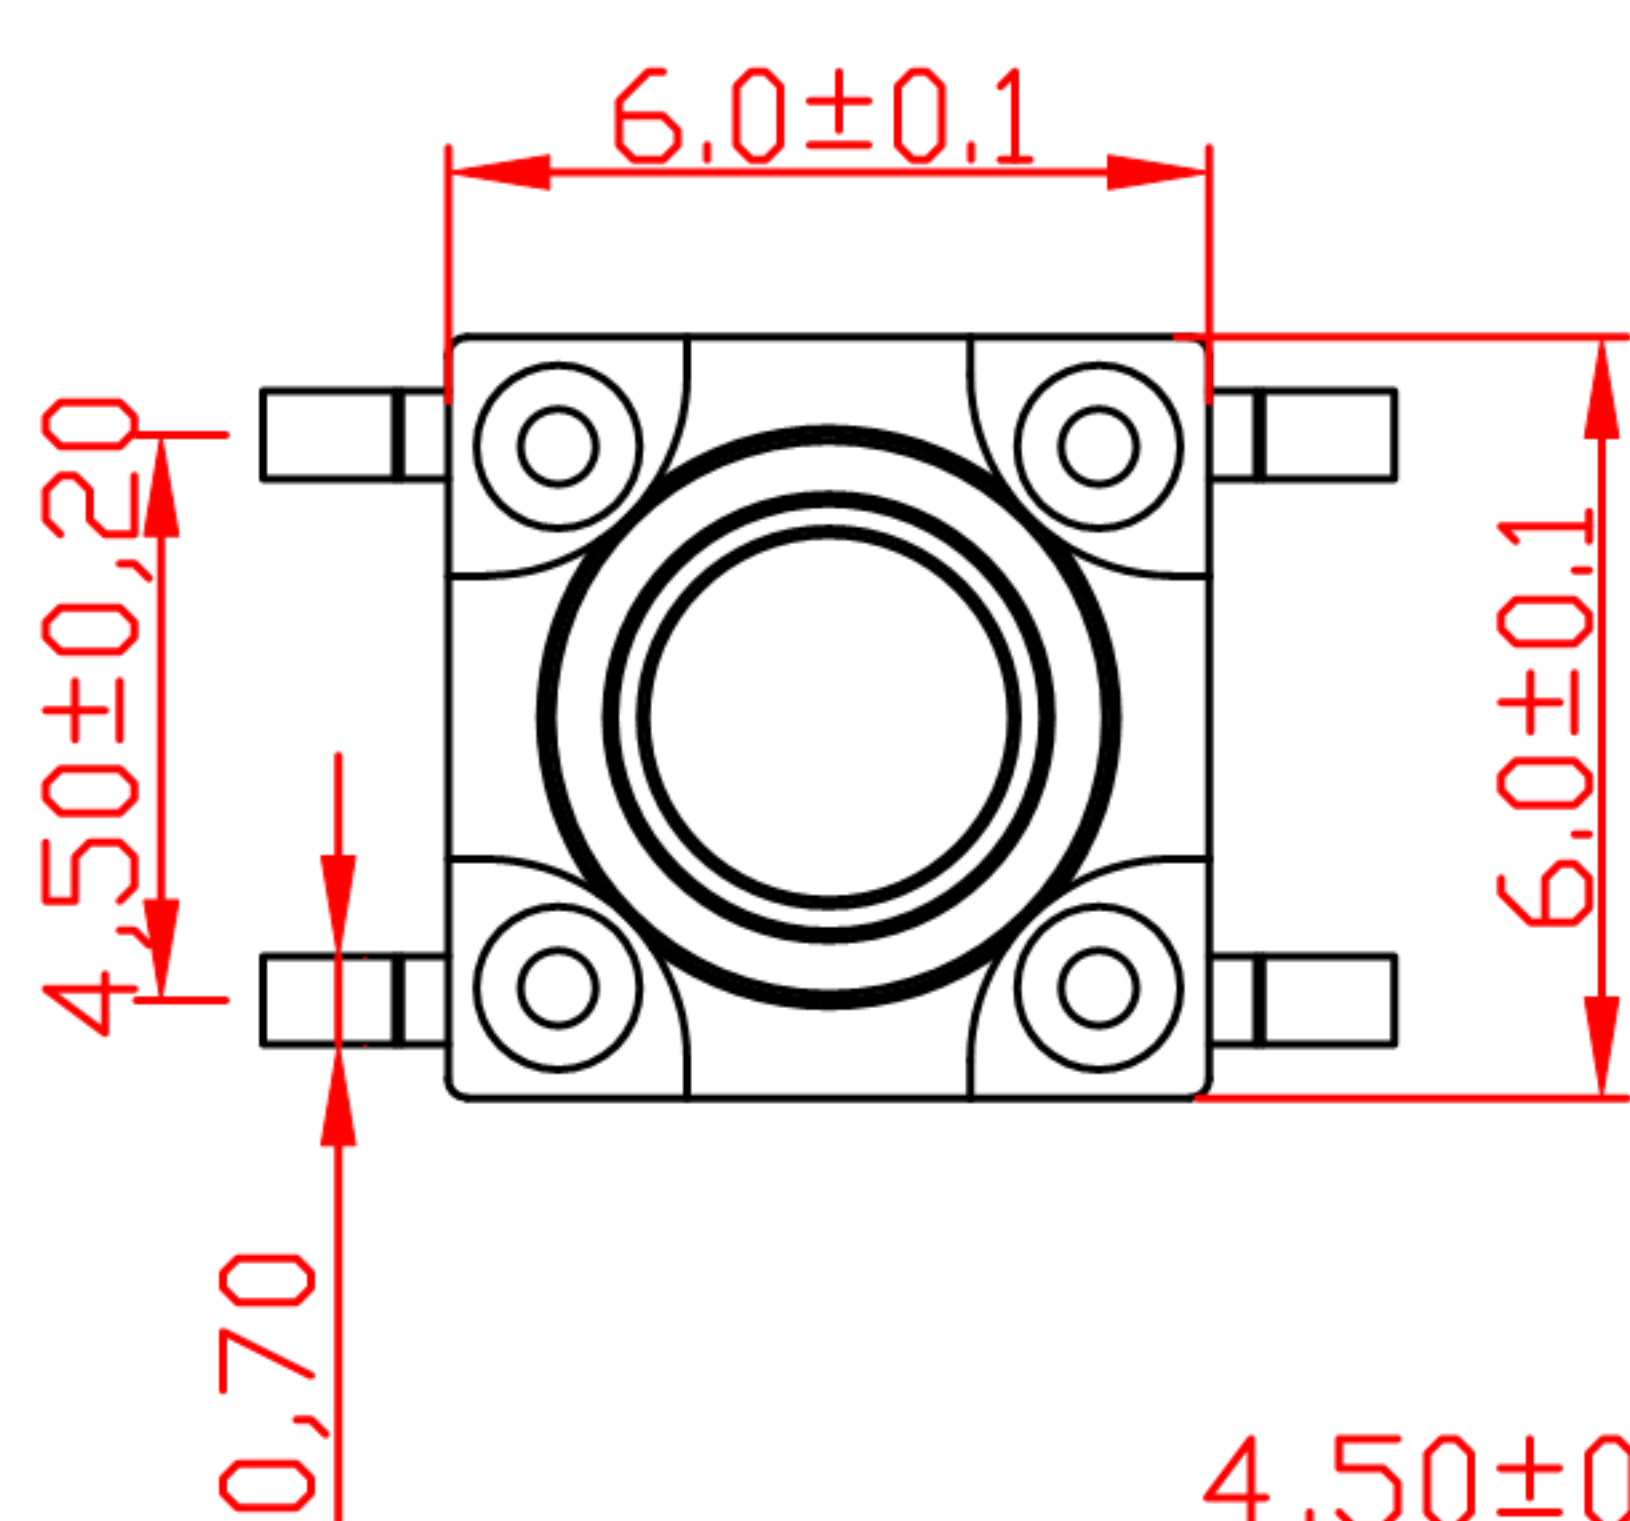


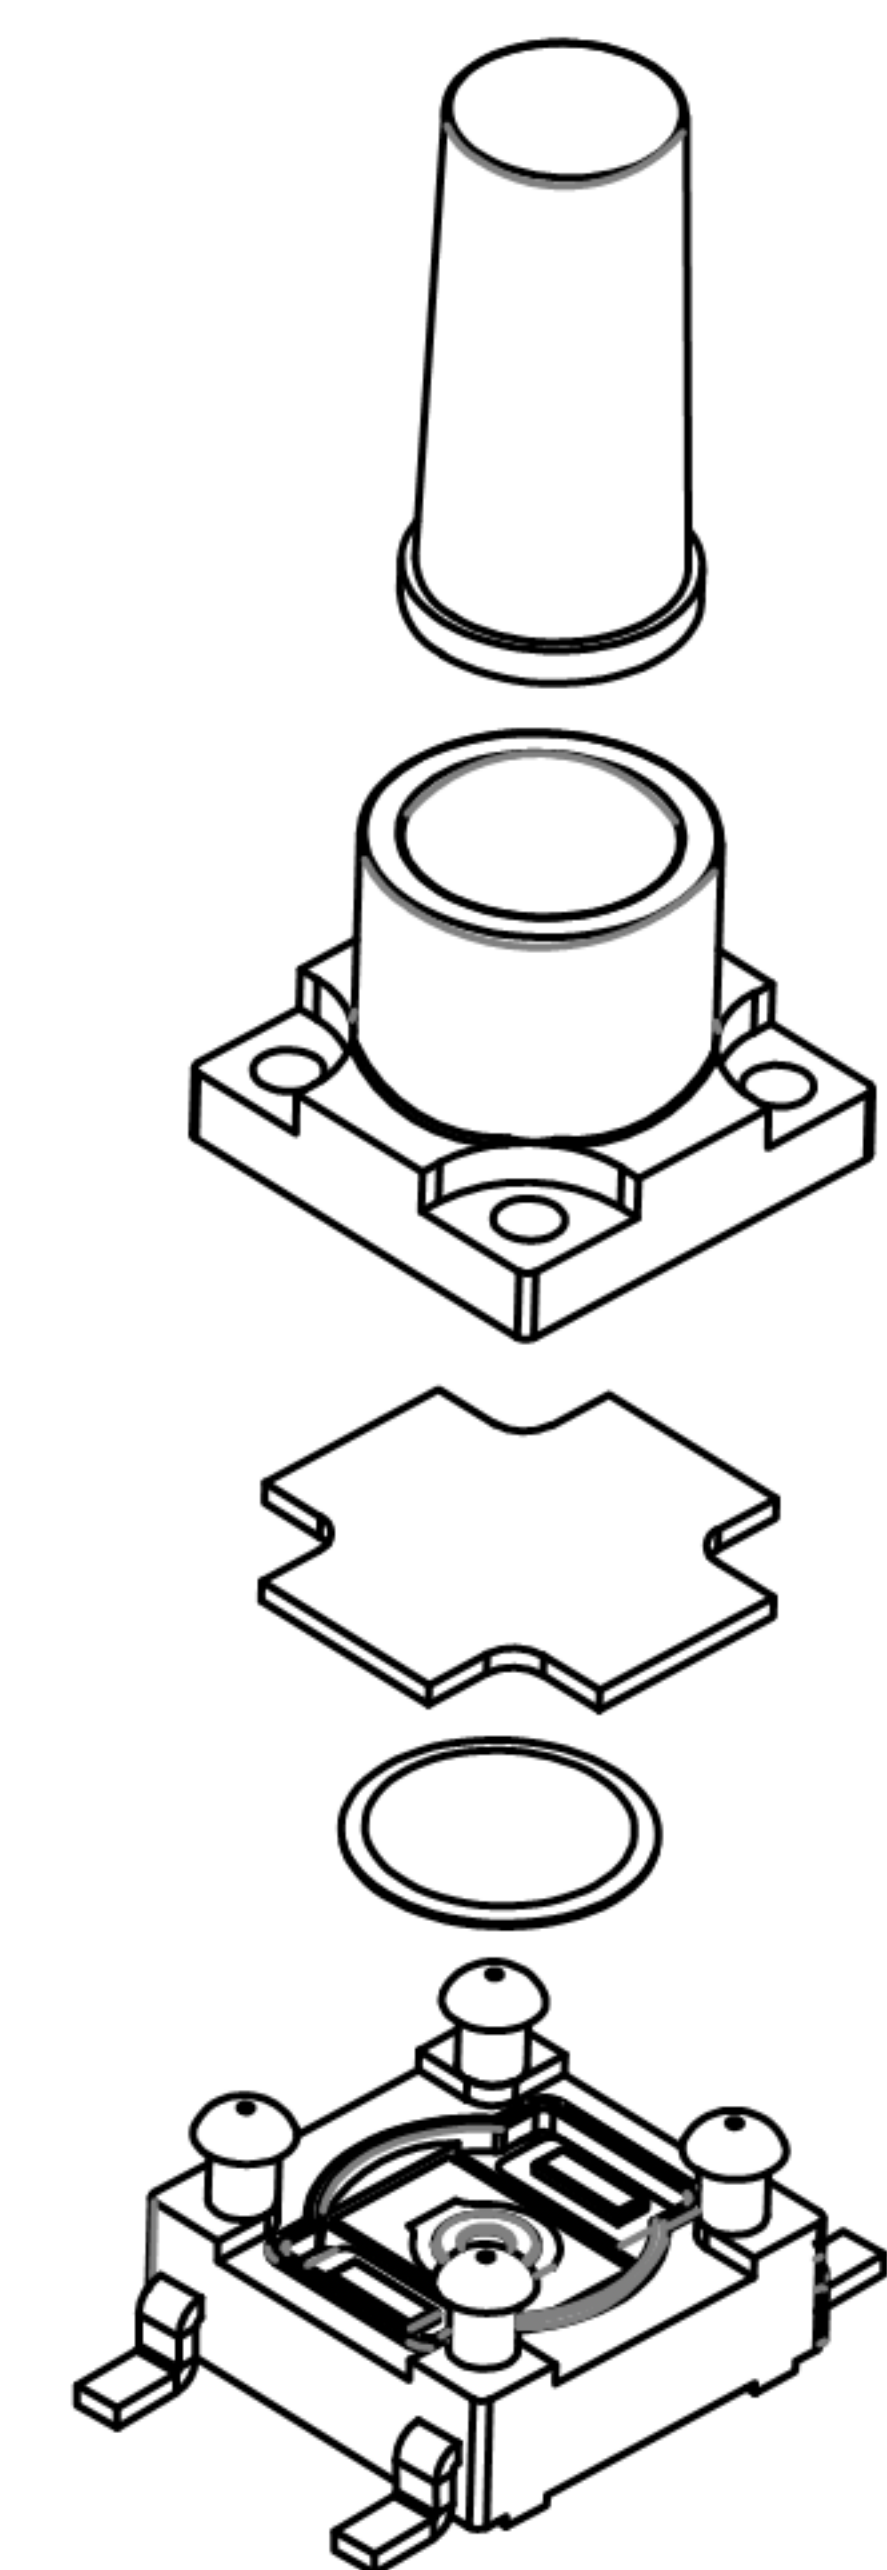




H	
8.5	9.0
9.5	10.0
11.0	12.0
12.5	13.0
15.0	

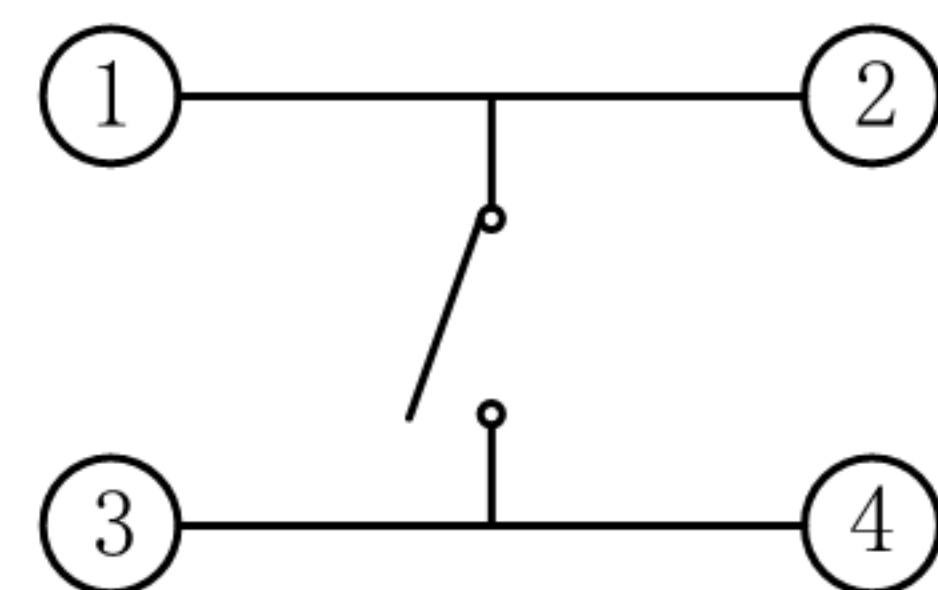

SCHEMATIC

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: ≤50mΩ
3. 操作力: 160gf±50gf&250±50gf
4. 行程: 0.3±0.1mm
5. 绝缘电阻: ≥100MΩ
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles
8. 防水等级: IP67
9. 防银迁移: 60V, 85℃, 90%RH/60H

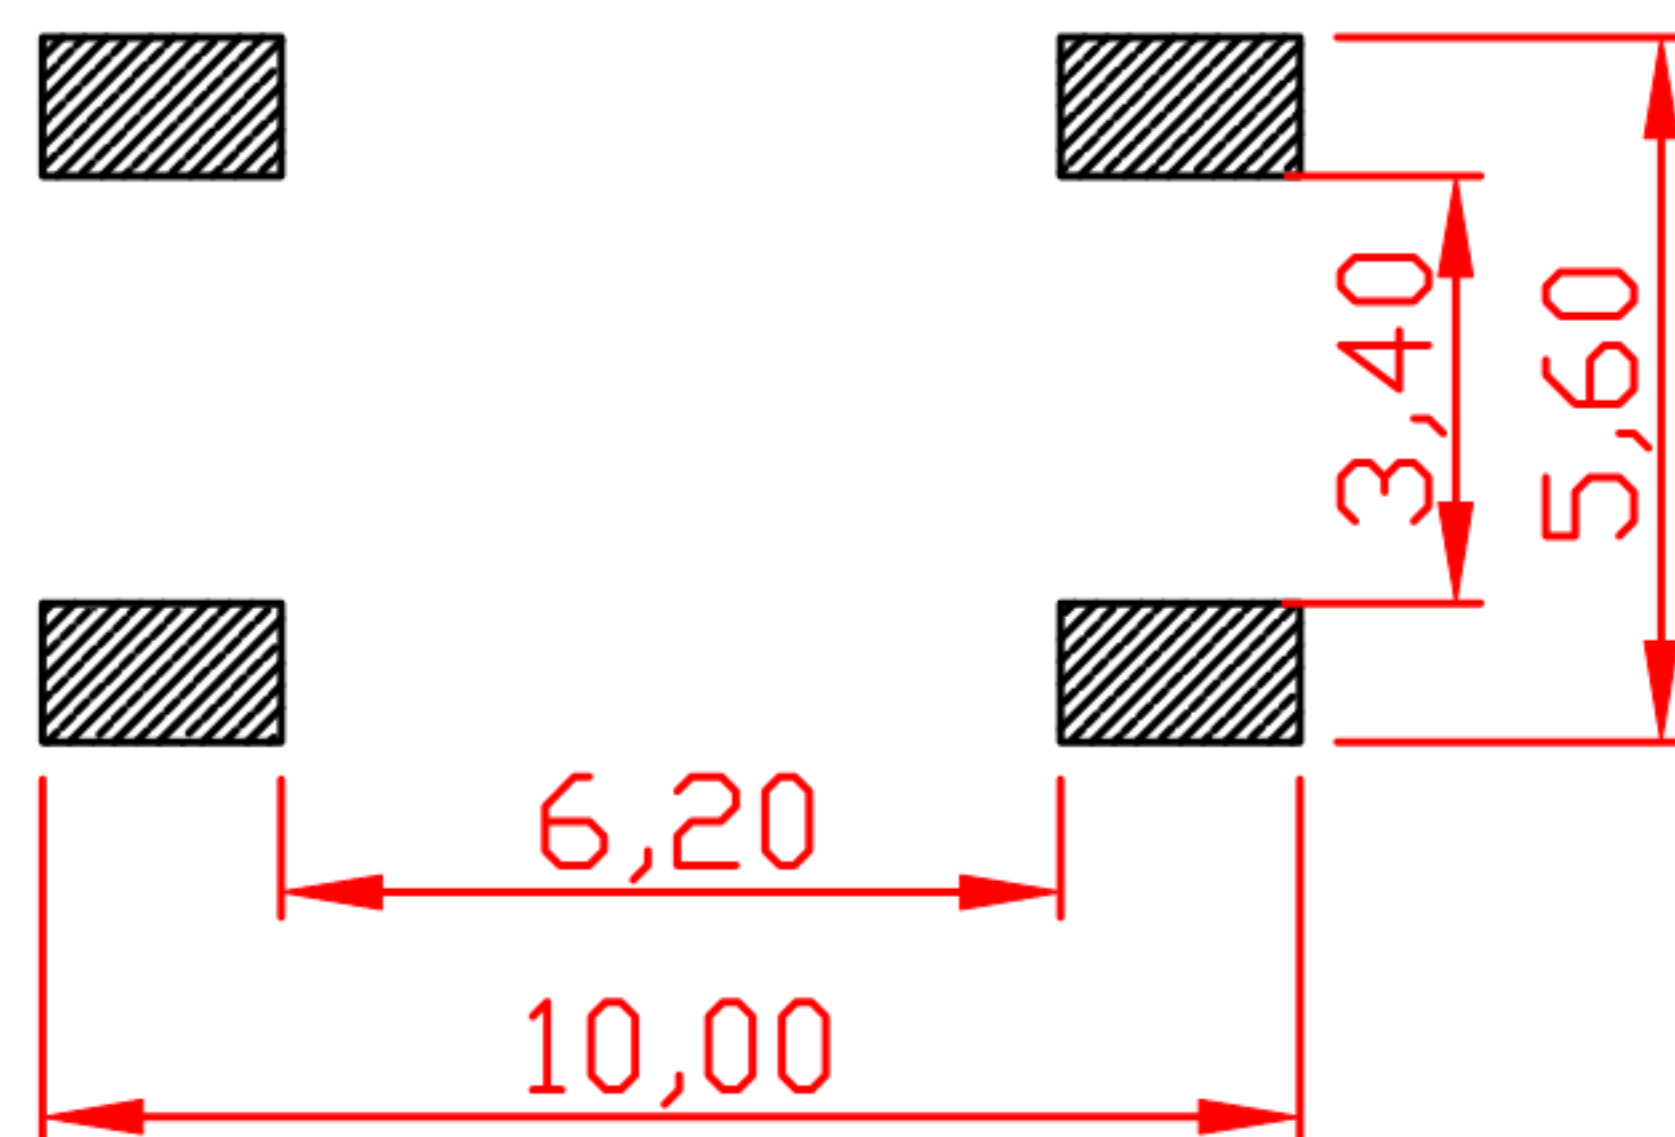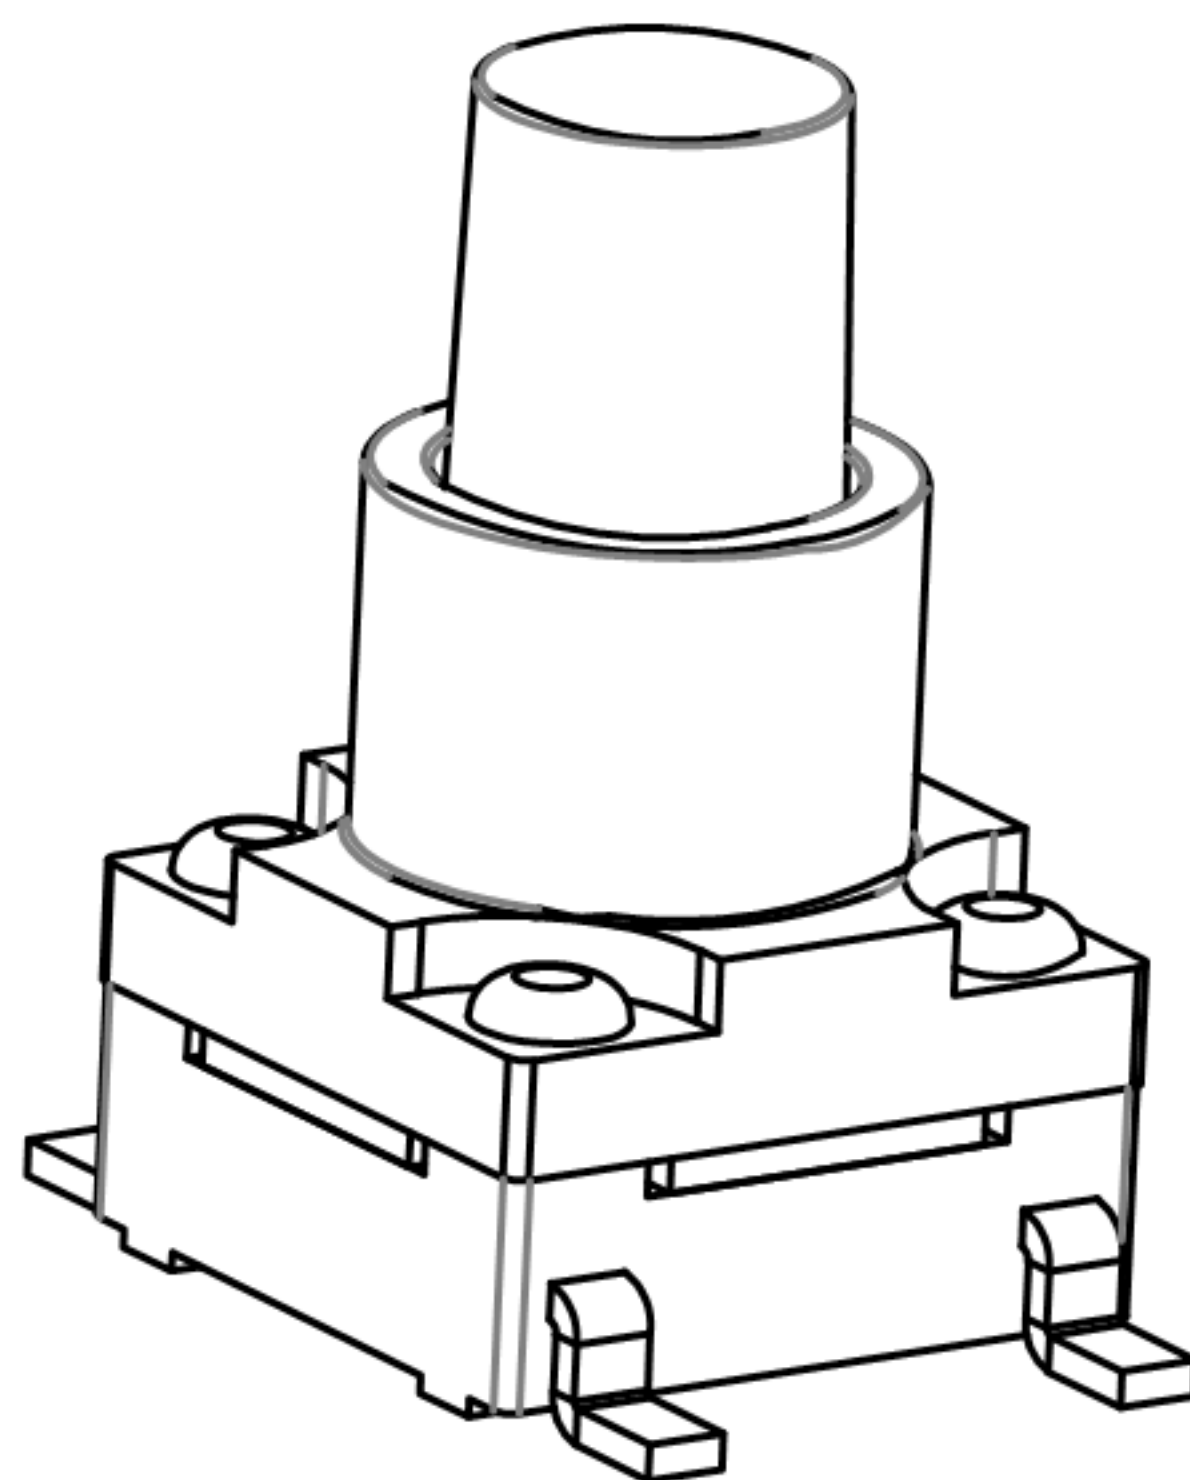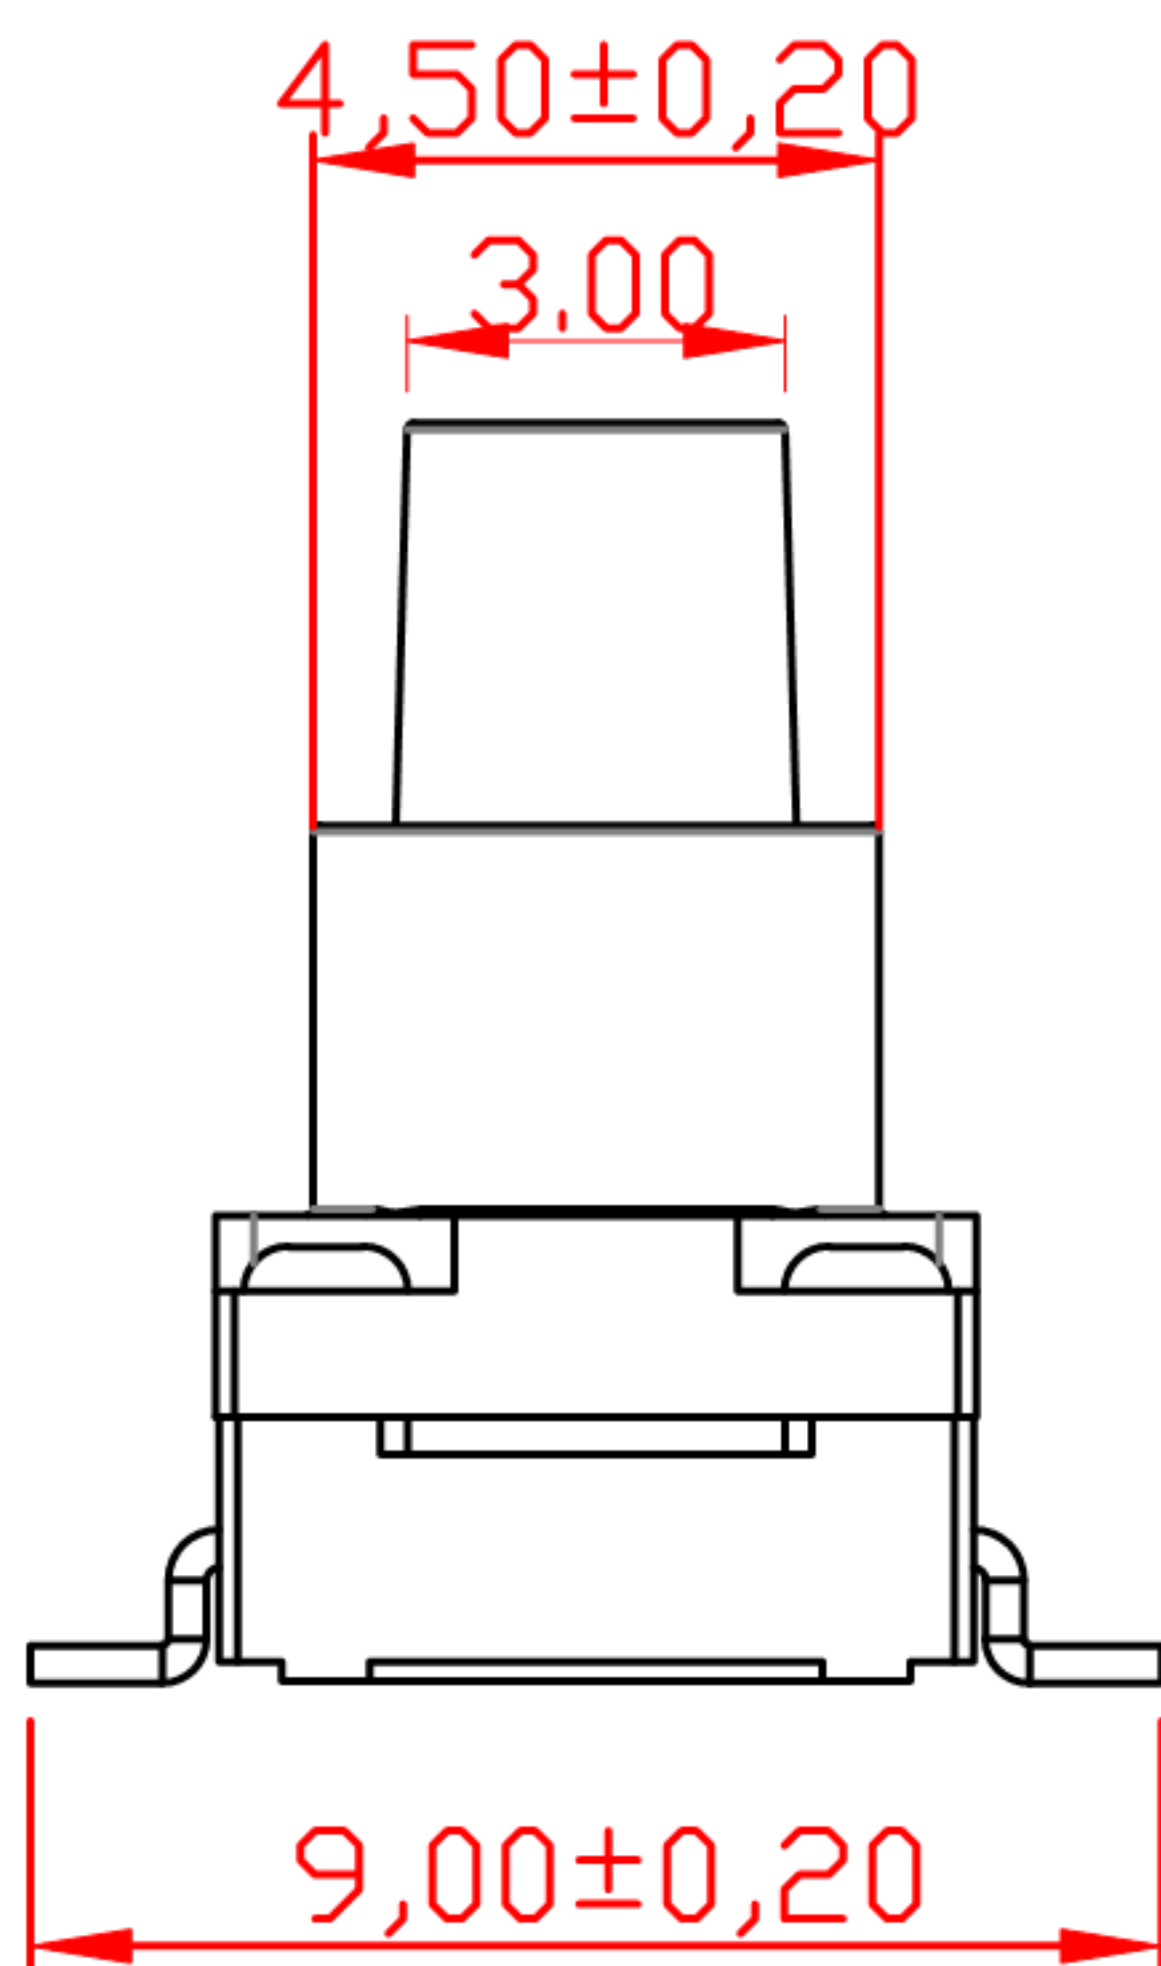

PCB. 焊接图

注：“*”表示关键尺寸(4个).

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版		ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-66FS-SMT	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED						2012-9-25
1	KNOB	PPA	1	BLACK					CHK'D	DONG. PANG
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.	ZENQ. CHEN
										2012-9-25