





CAD FILE:

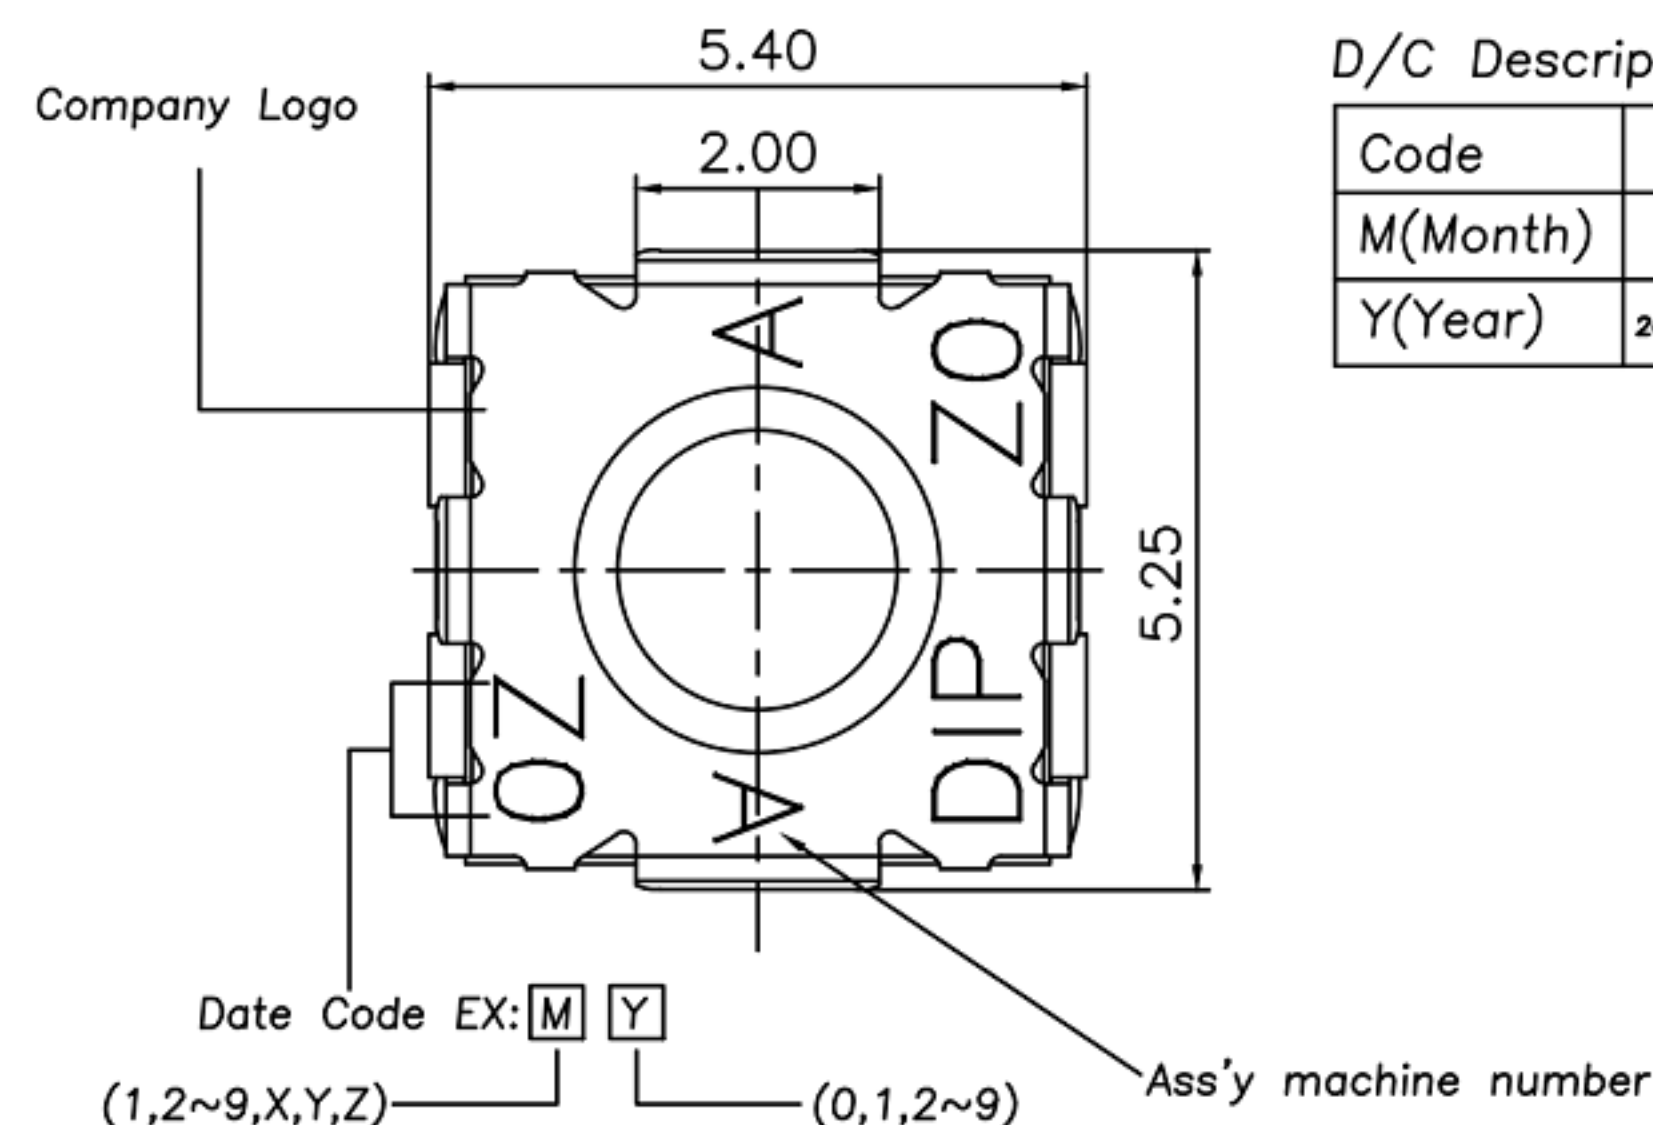




D/C Description :

Code	1	2	3	4	5	6	7	8	9	X	Y	Z
M(Month)	1	2	3	4	5	6	7	8	9	10	11	12
Y(Year)	2021	2022	2023	2024	2025	2026	2027	2028	2029	2020		

P.C.B Mounting
pattern Dimension

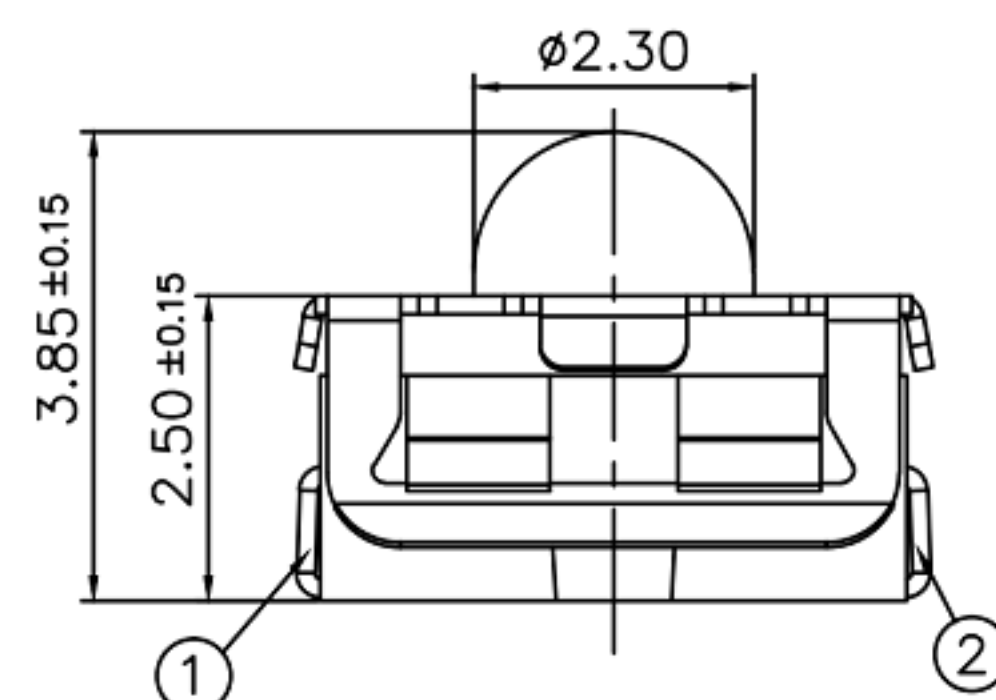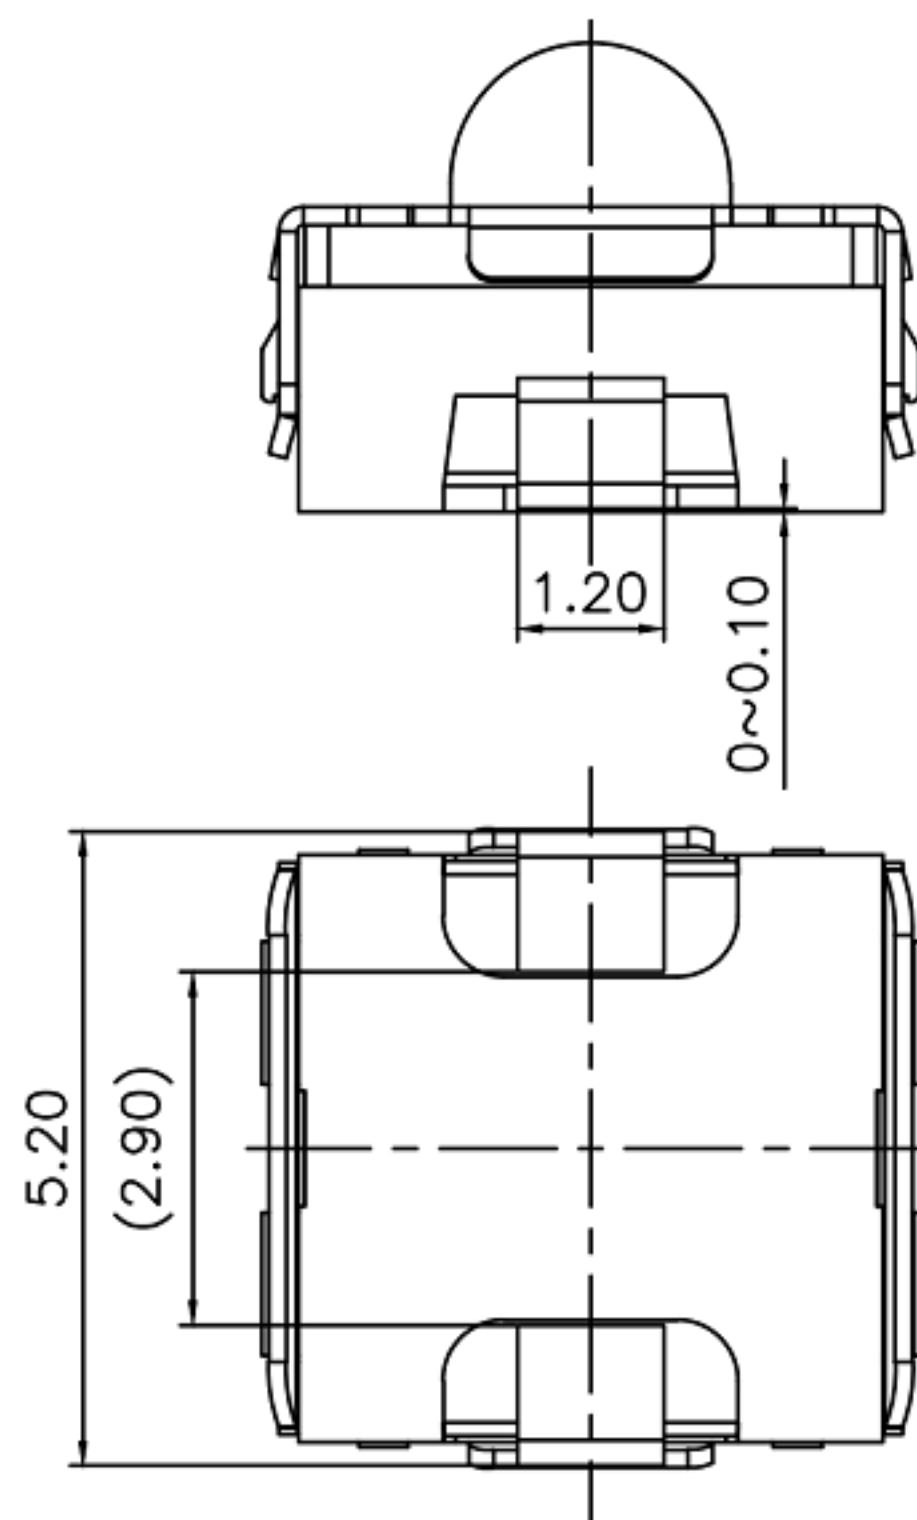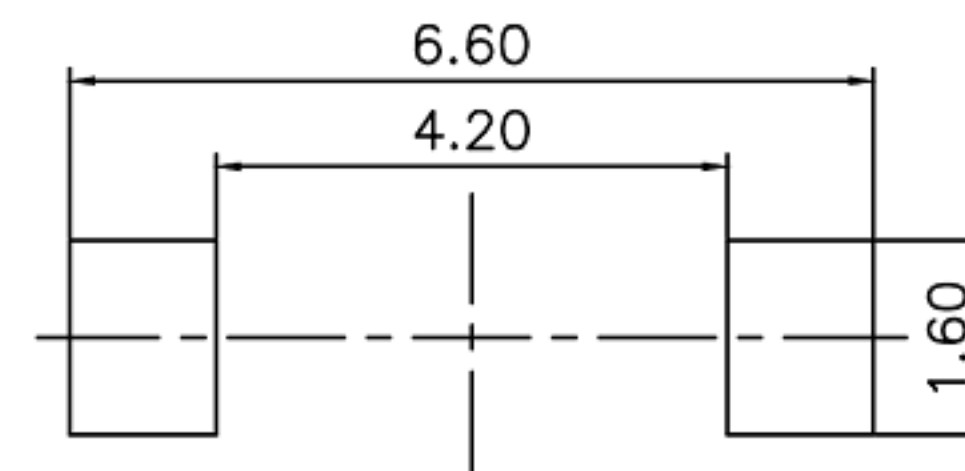

Circuit Daigram

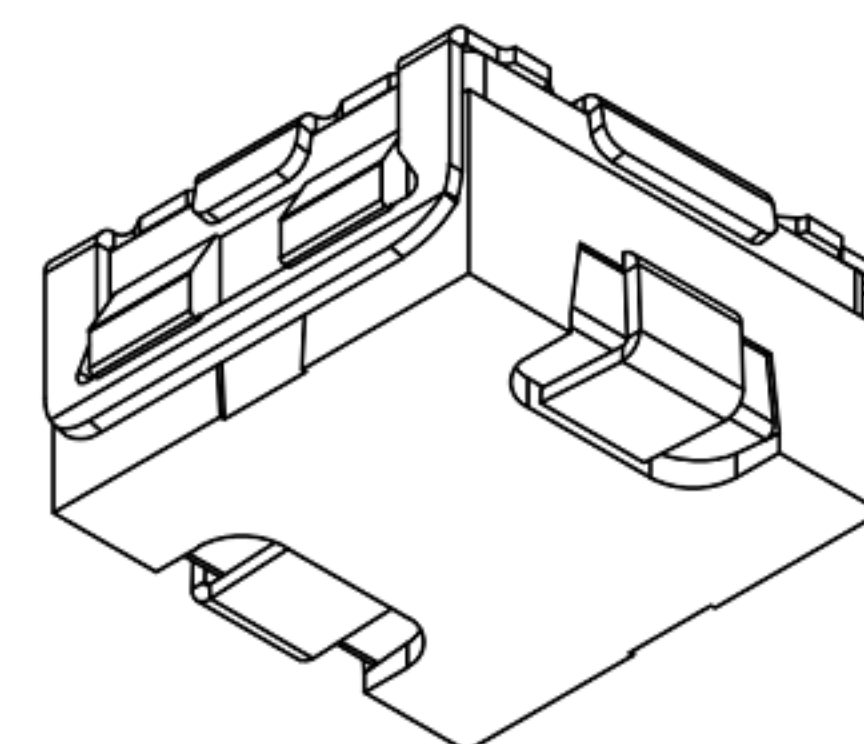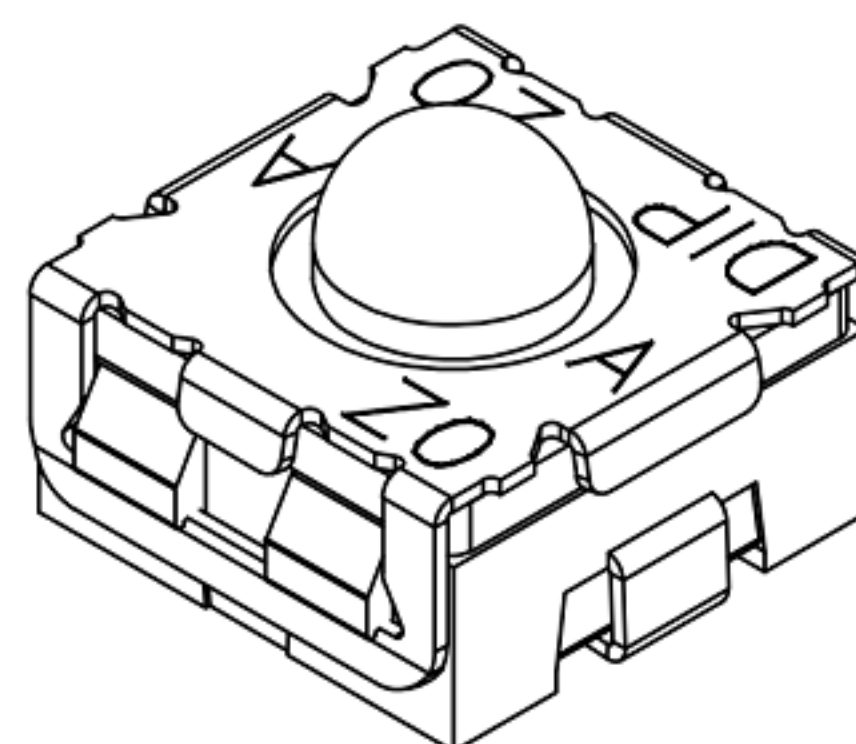

Specifications :

- Rating : 50mA,DC 16V Max.
1μA, DC 1V Min.
- Initial contact resistance : 100mΩ Max.
- Insulation resistance : DC100V-10MΩ Min.
- Dielectric strength : AC250V-1 minute.
- Operating force : see product specification
- Operating life : see product specification

Note:

- General tolerances ±0.2mm.
- Solder thickness : 0.15mm

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	11-Apr-2019	初版	CHEN ZENQ
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag PLATED	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-FS-5201
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. CHEN ZENQ 11-Apr-2019
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	PANG JUN 11-Apr-2019
1	KNOB	PPA	1	BLACK				APPD.	WU LIANG 11-Apr-2019
NO.	PARTS	MATERIALS	Q'TY	FINISH					