
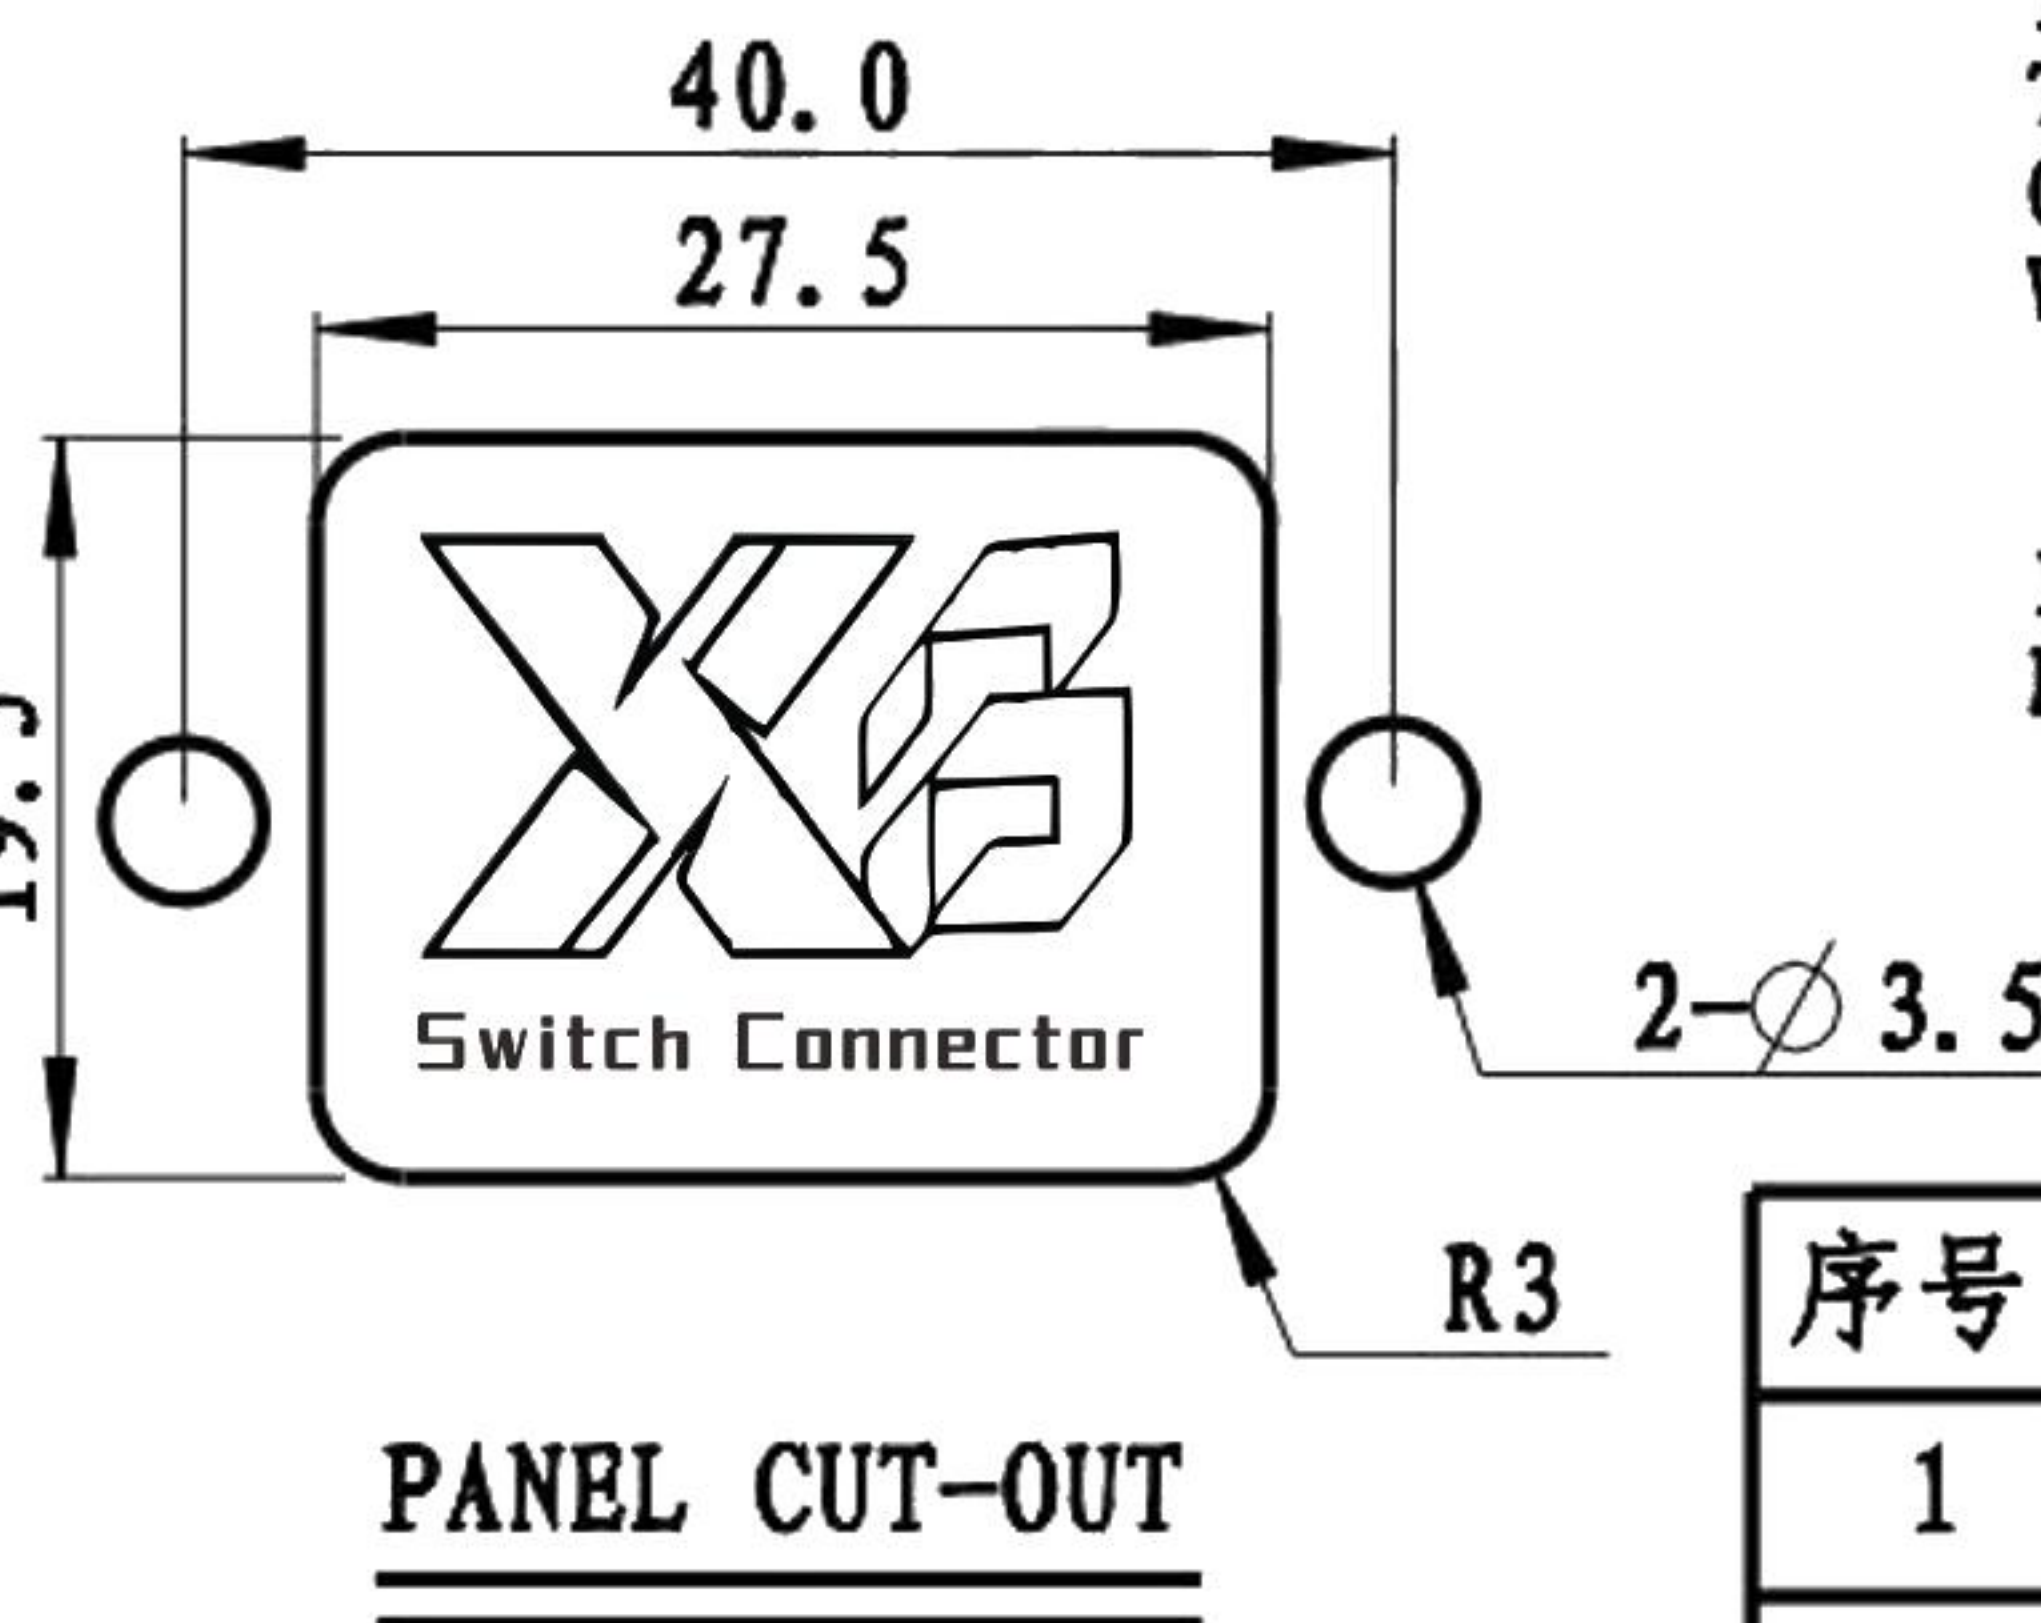
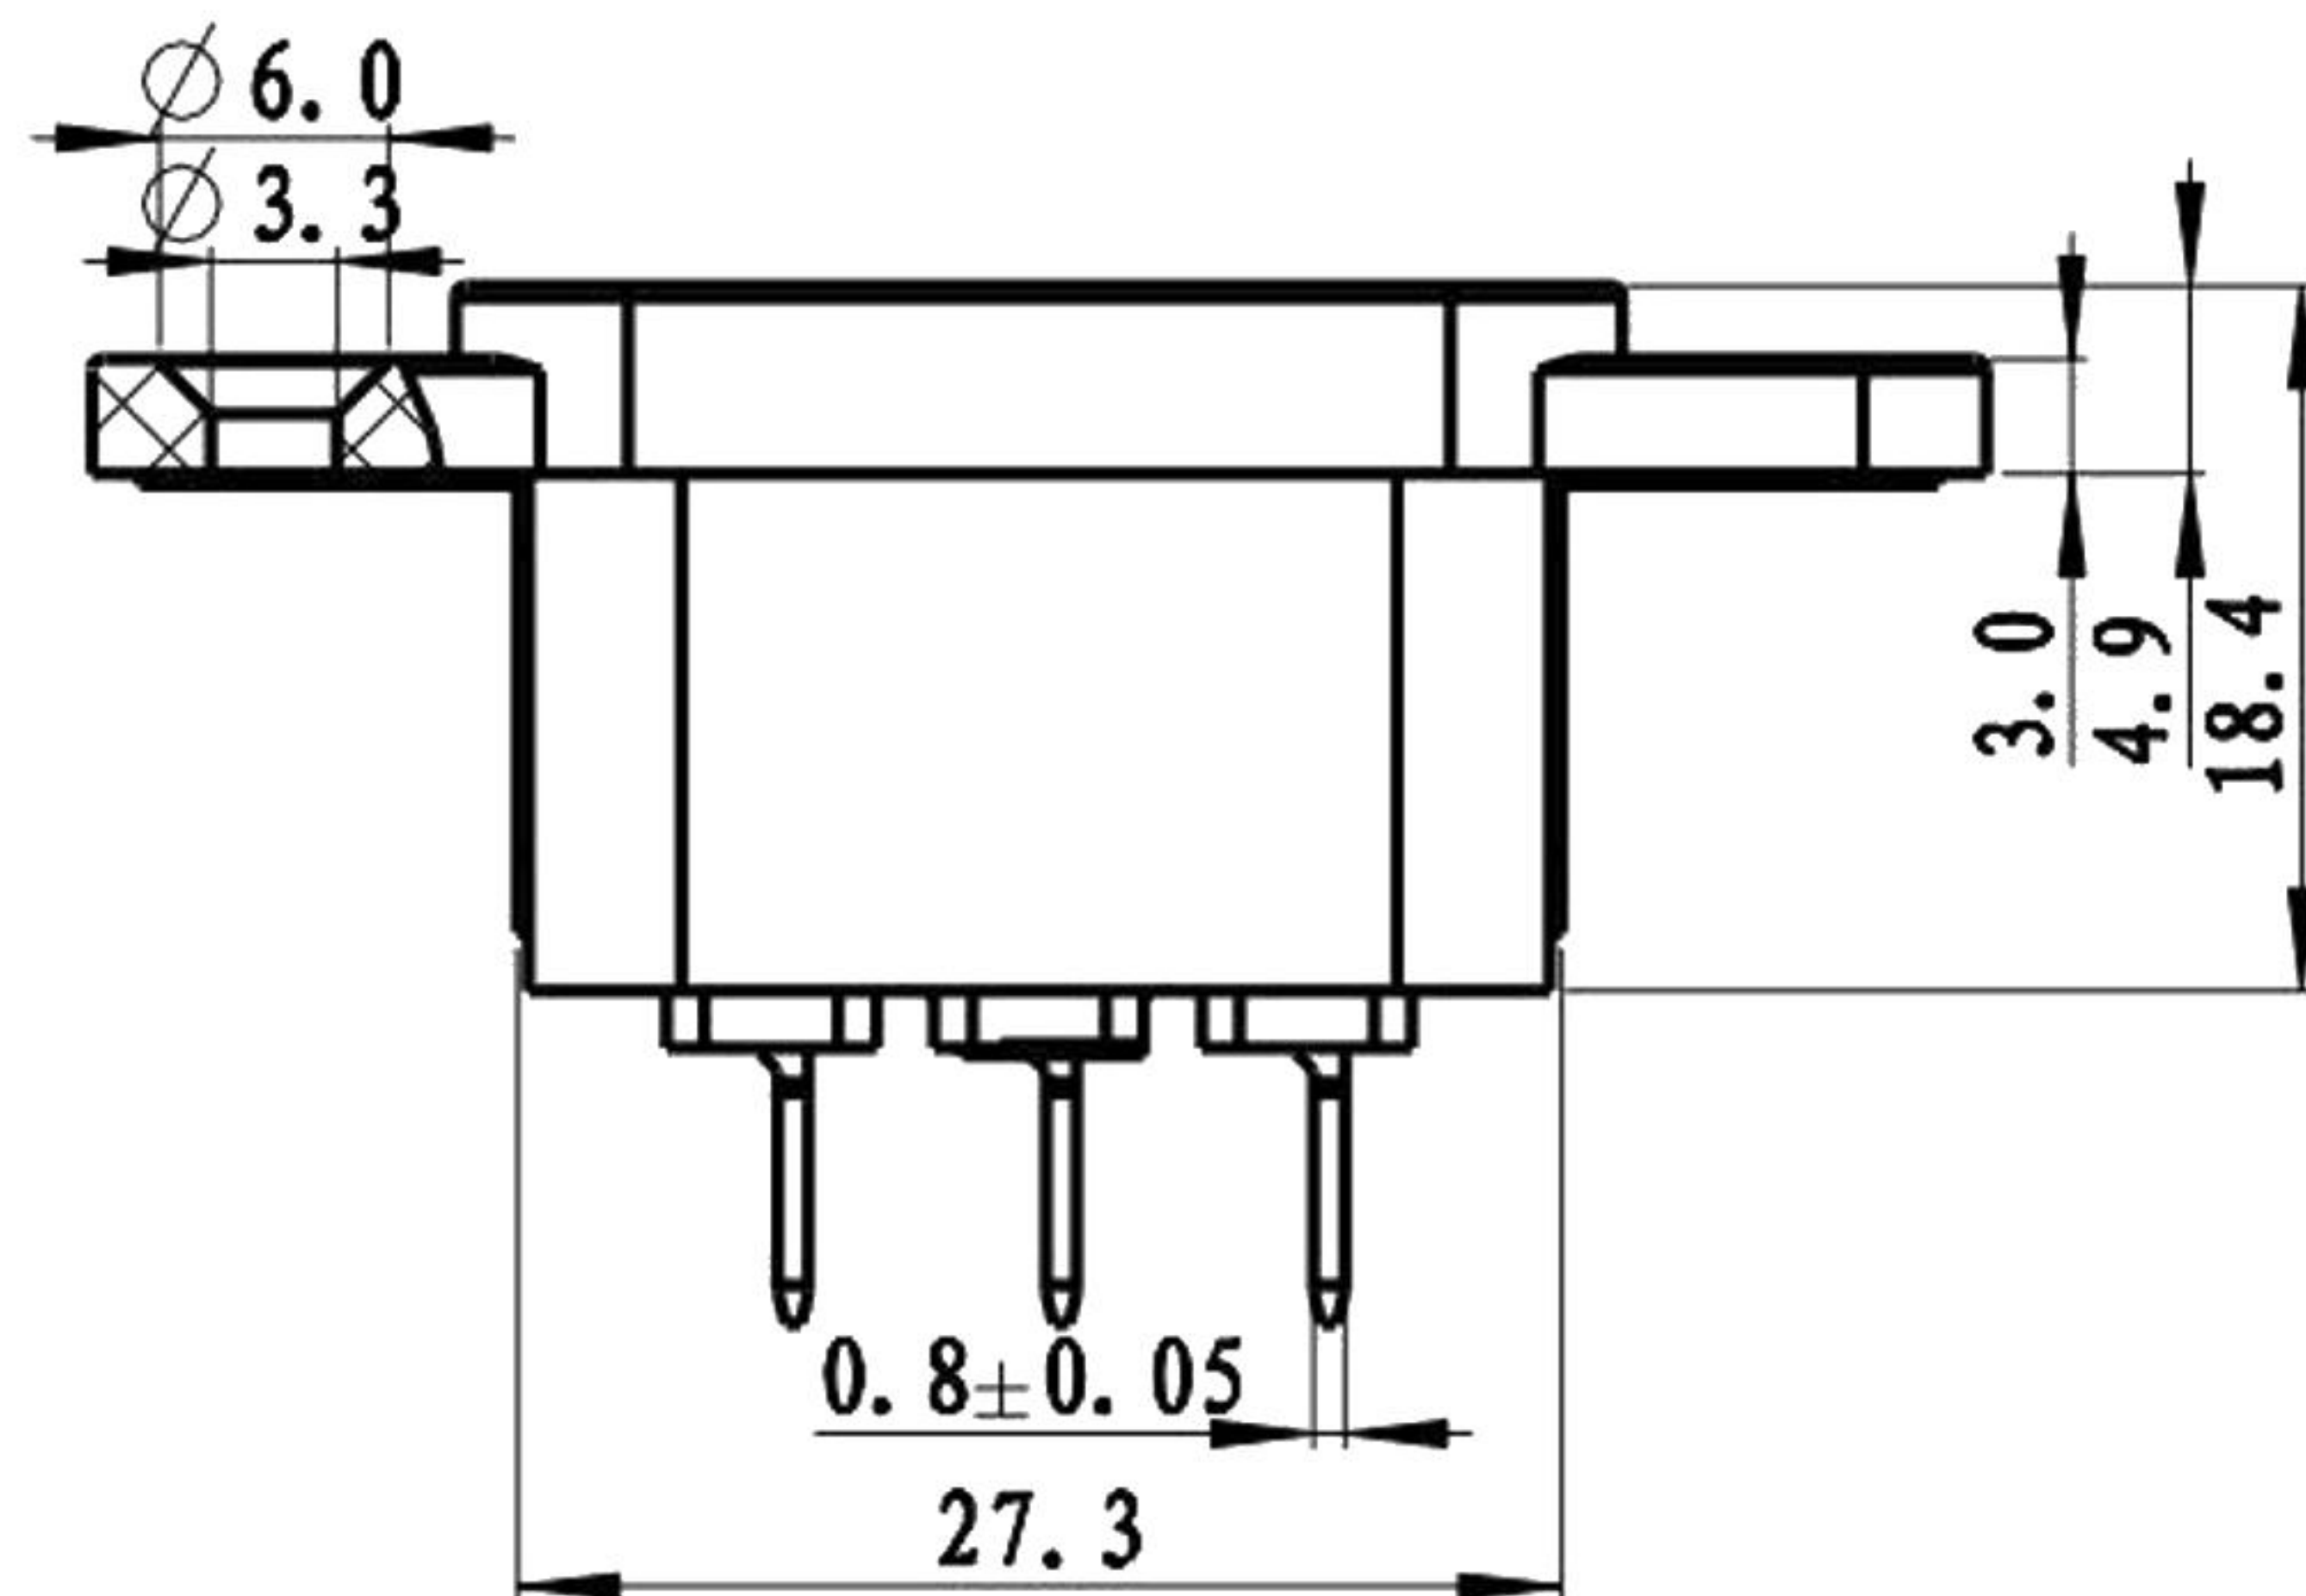
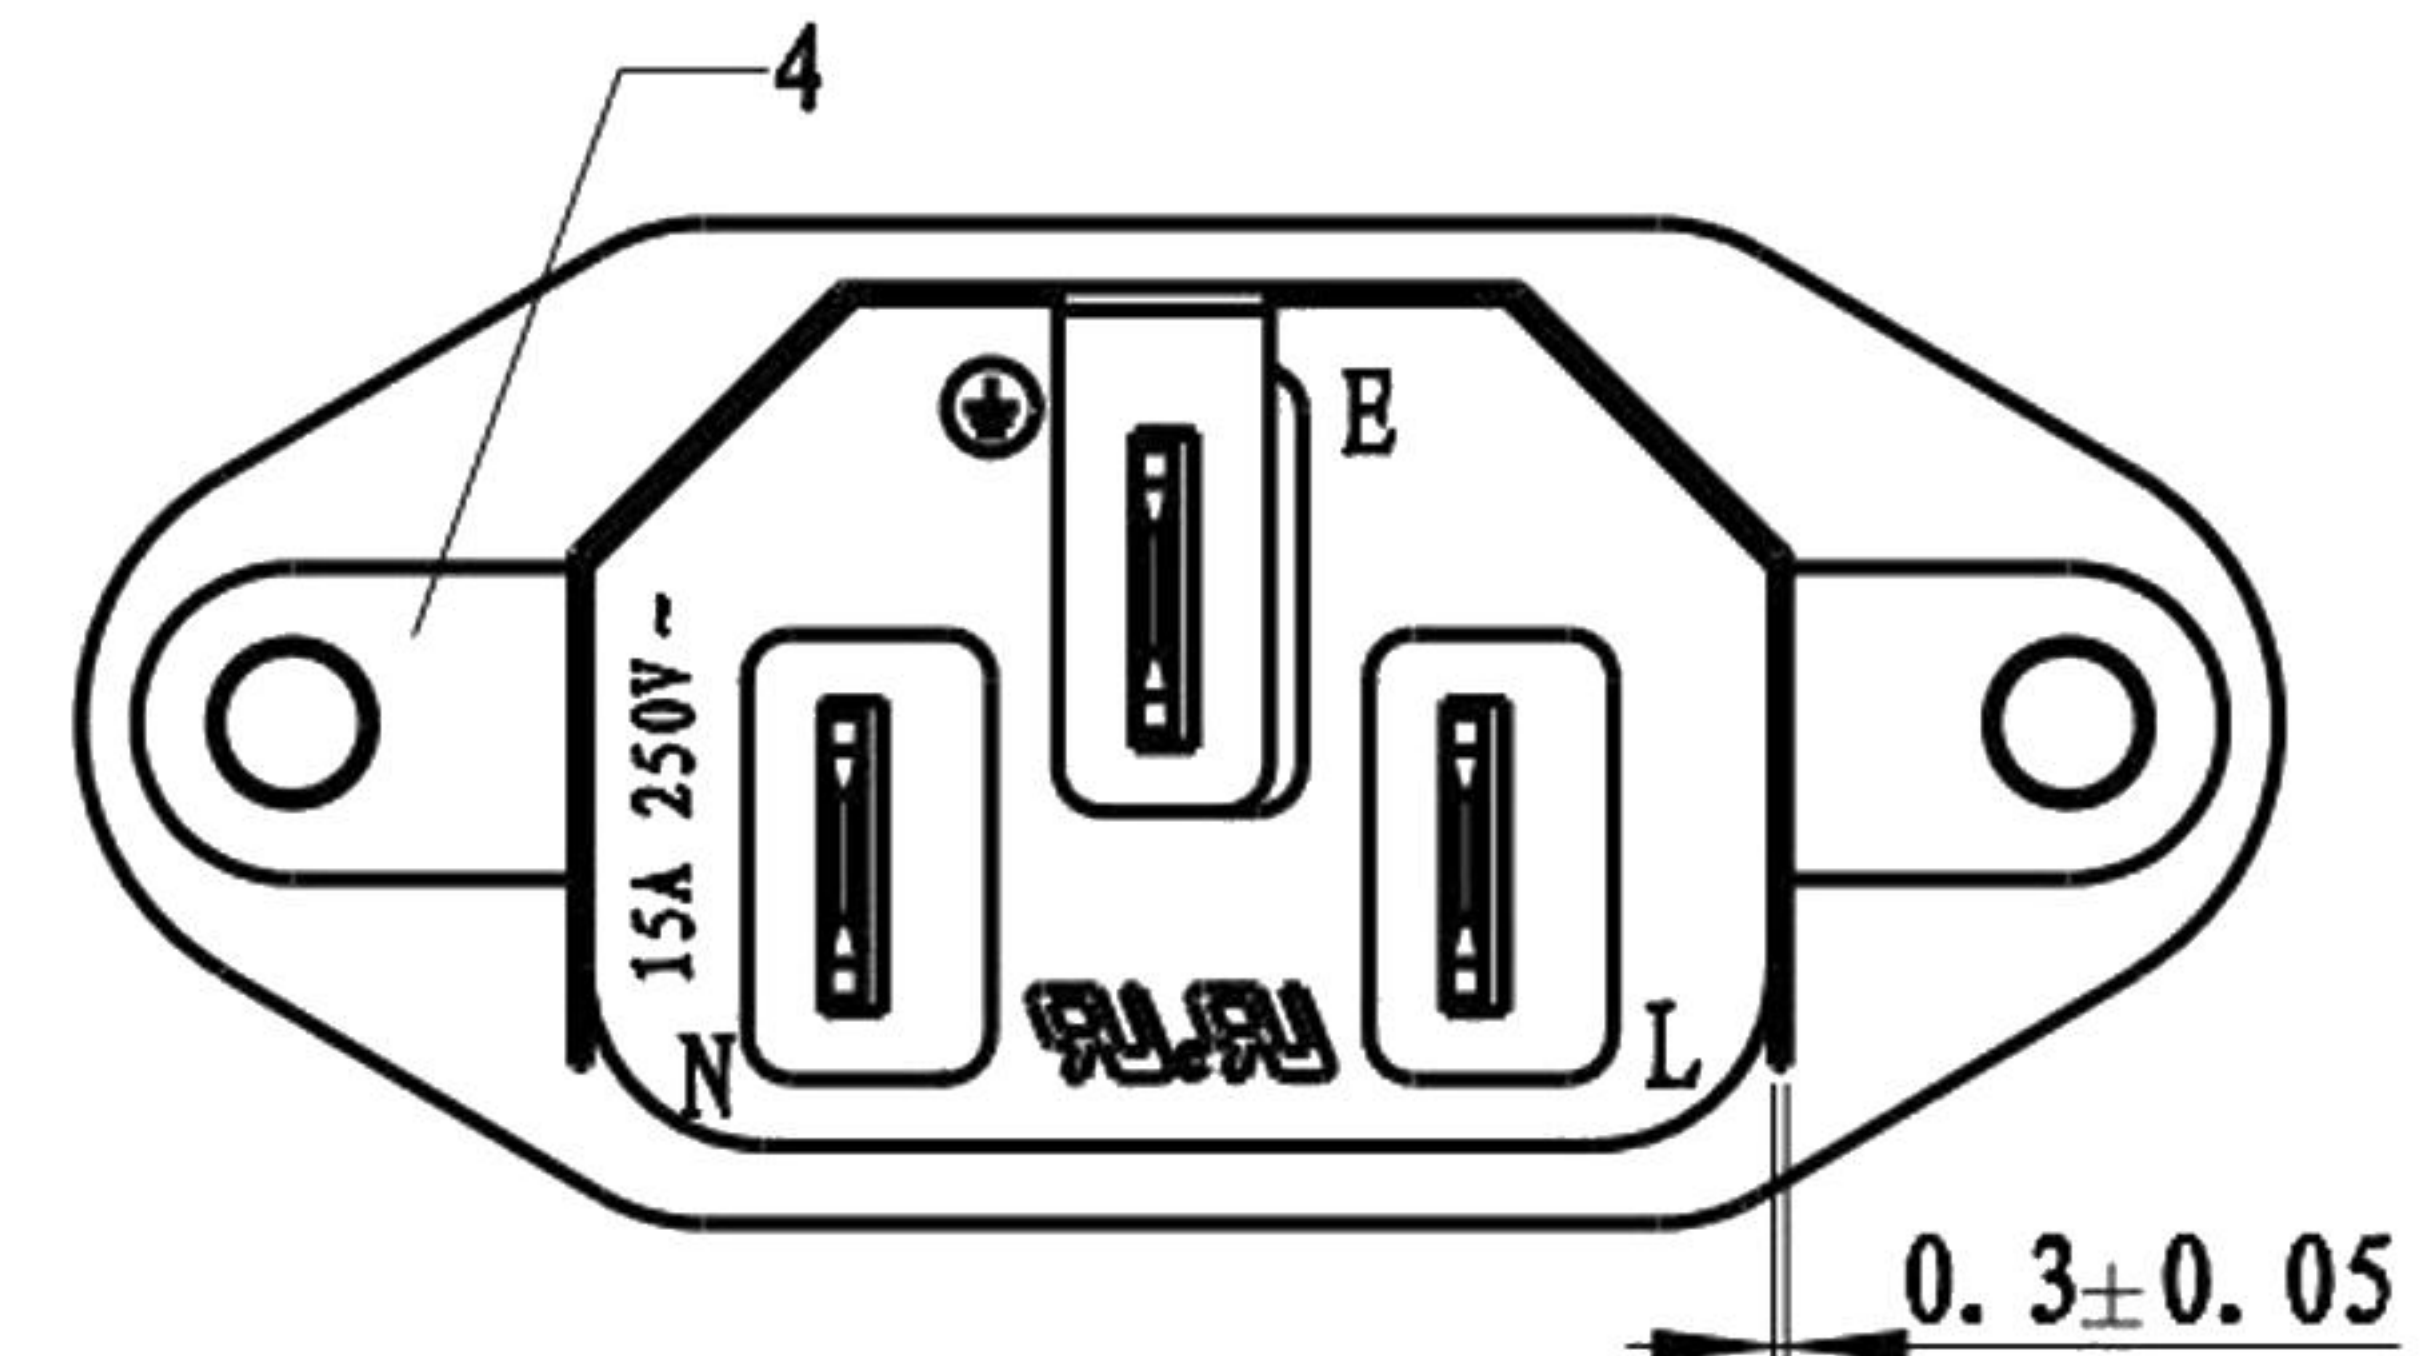
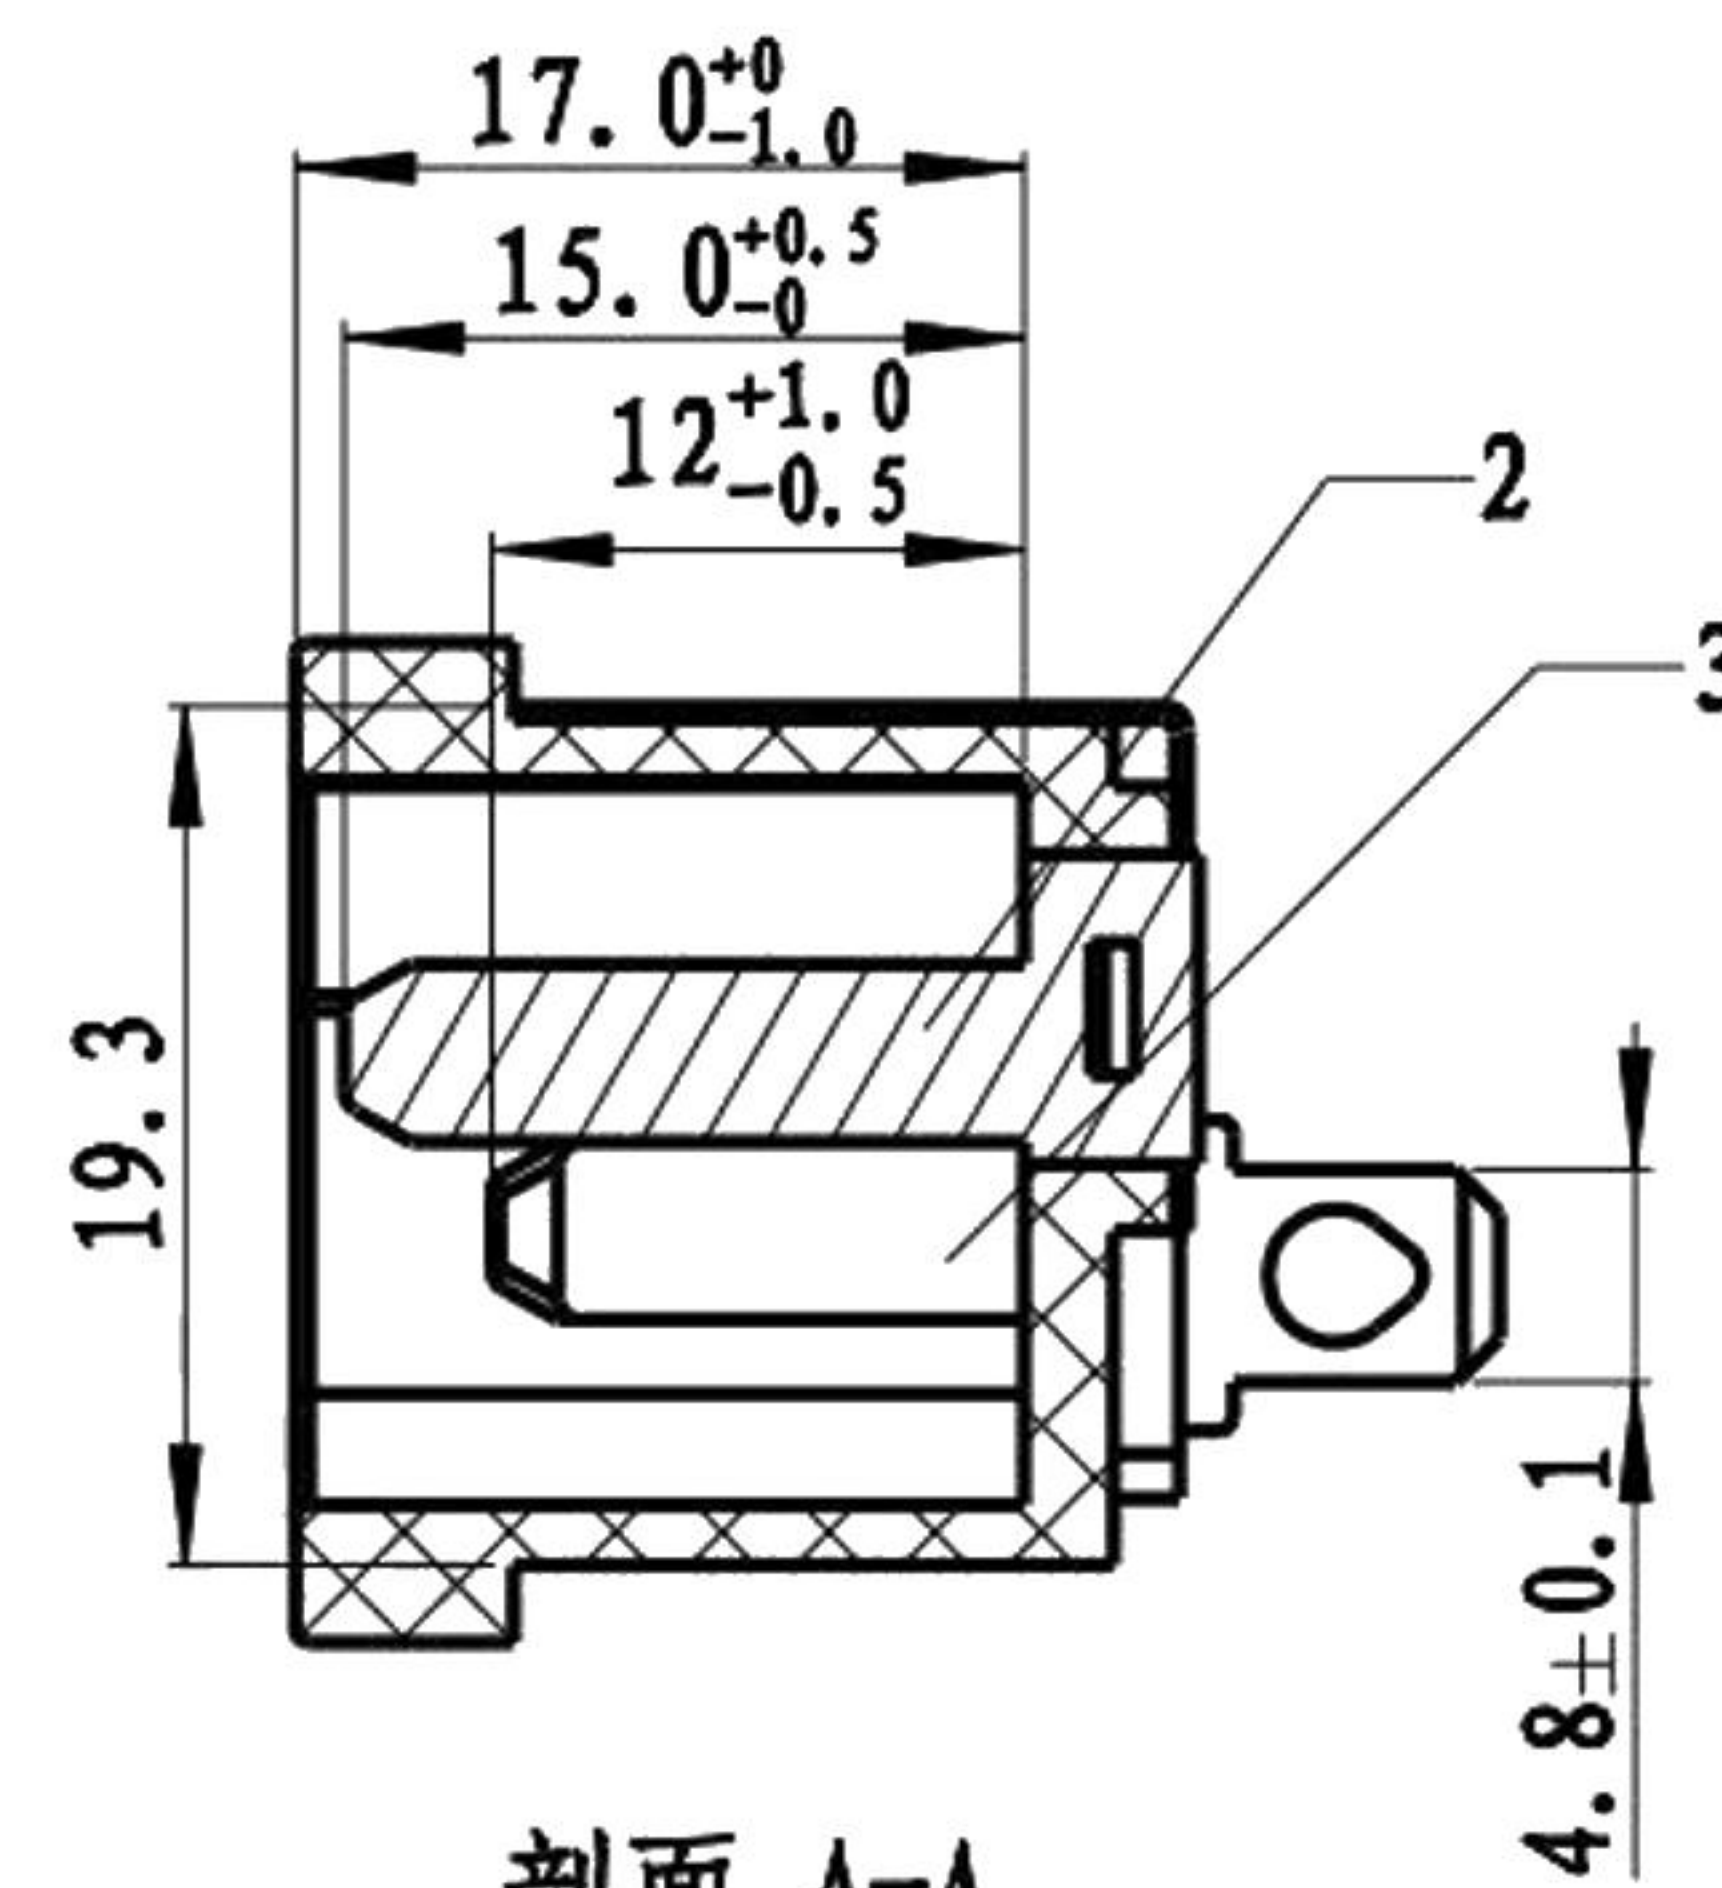


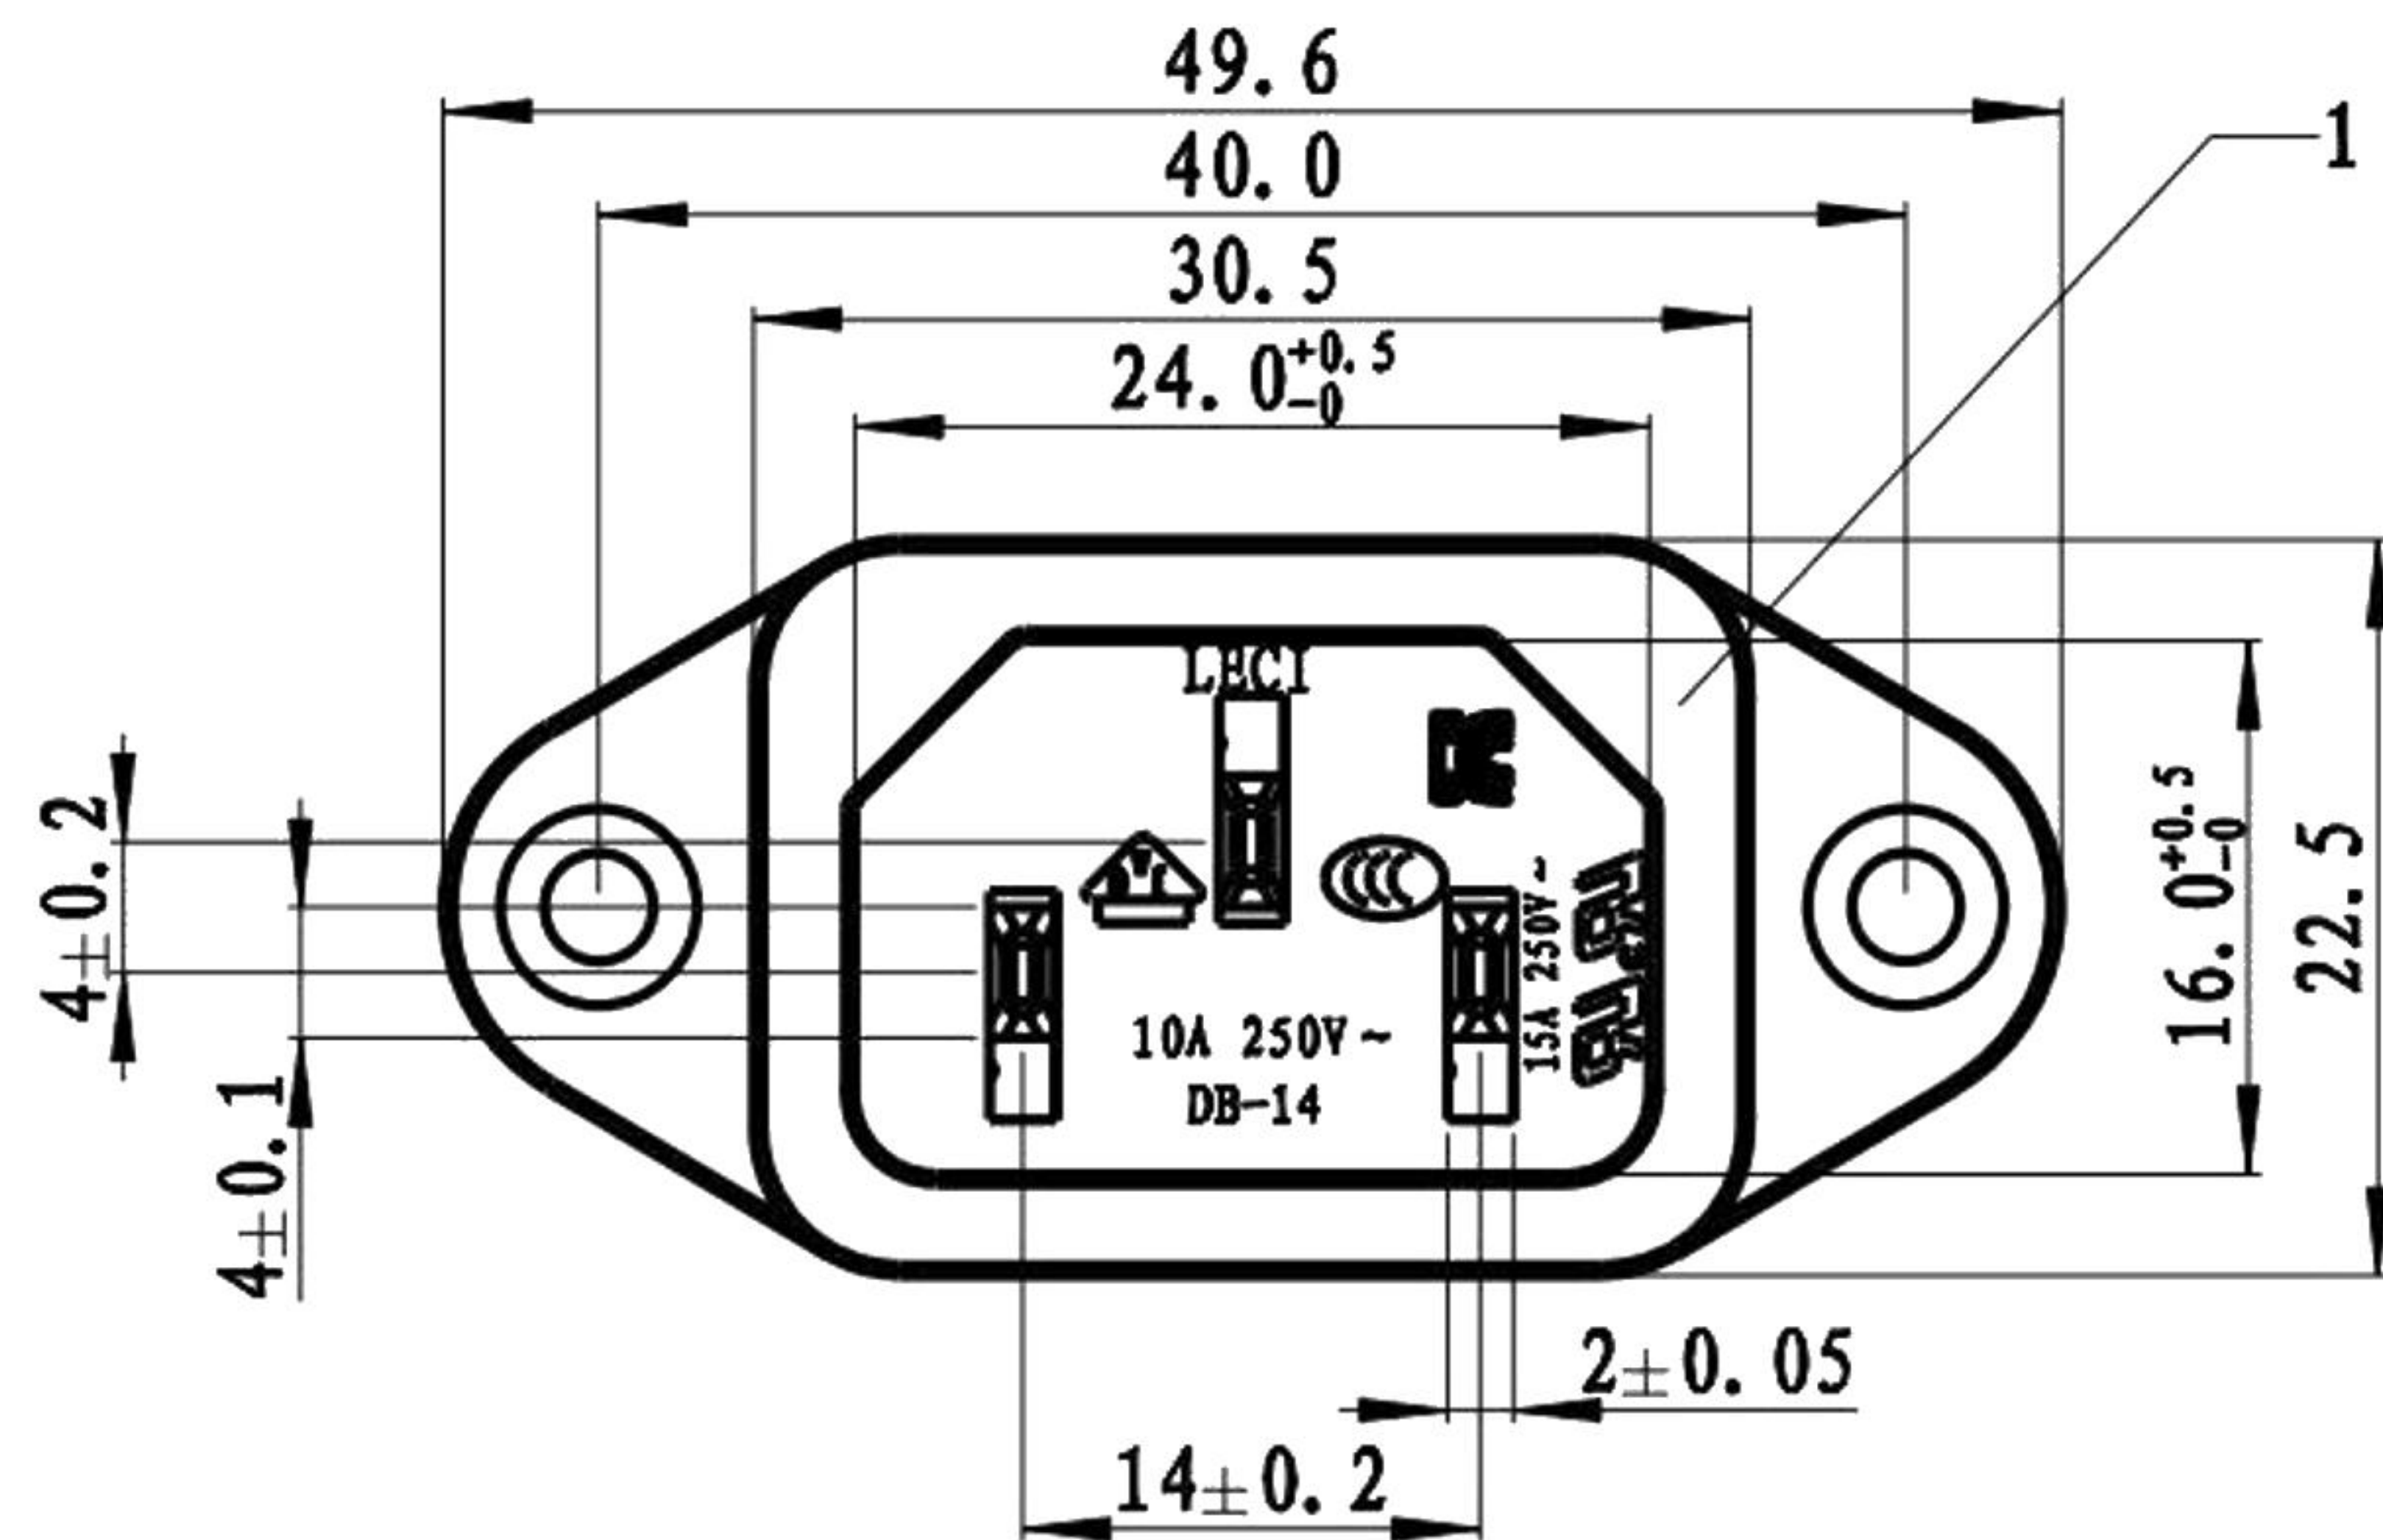

Rating :

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N

Terminal Strength: $\geq 60N$

Operating Life: ≥ 6000 cycles

Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: $>100M\Omega$ 500V DC

Body Material: PBT 94V-2~0

46*46*24.5cm箱, 100只*20袋装=2k件, 净重: 24.2 毛重: 26.2=KG,

序号	名称	材料	处理	数量	备注
1	DB-14-1塑料件	环阻PBT	黑色	1	
2	DB-14-FL插销	黄铜	镀锡	1	Plating Thickness 40u" -80u"
3	DB-14-FS插销	黄铜	镀镍	2	Plating Thickness 40u" -80u"
4	DB-14-D05铁架	锰铜	镀镍	1	Plating Thickness 40u" -80u"

普通公差:

COMMON TOLERANCE :

UP TO 5 ± 0.20

ABOVE 5 TO 30 ± 0.30

ABOVE 30 ± 0.50

ANGULAR $\pm 5^\circ$

单位

mm

投影

Ac Inlet C14型

品名

Ac Inlet C14型

比例

Free

绘图

金泽杰

核对

张华龙

型号

/DB-14

日期

2022/4/6

核准

周培雷

料号

DB-14-1F(T)-ZP

REV.

DATE

REVISION DESCRIPTION

ISSUE



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.