

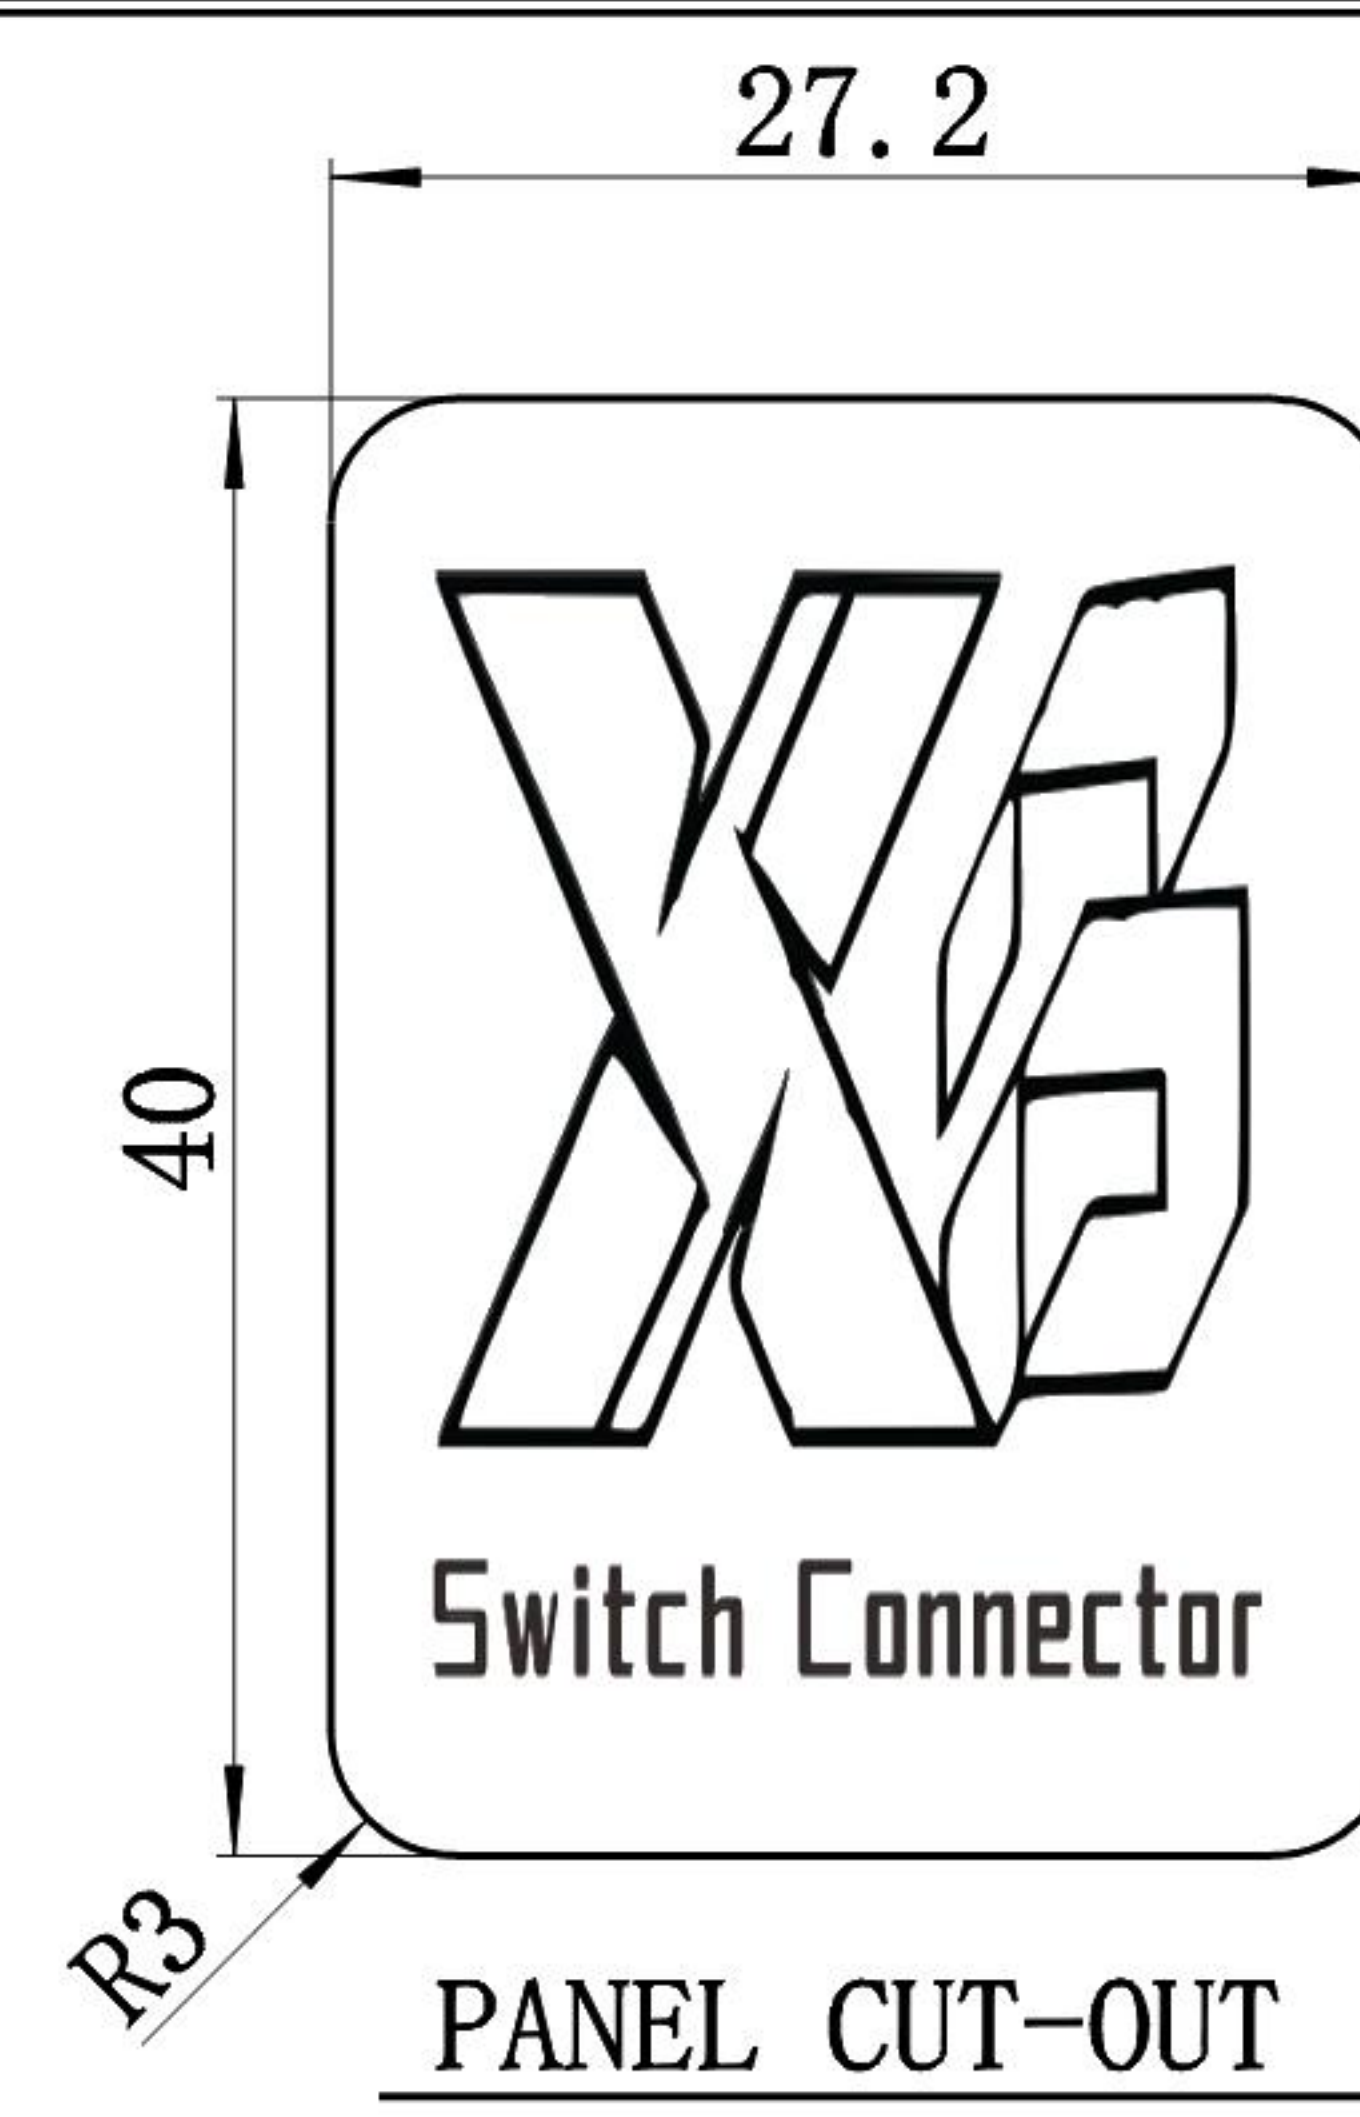
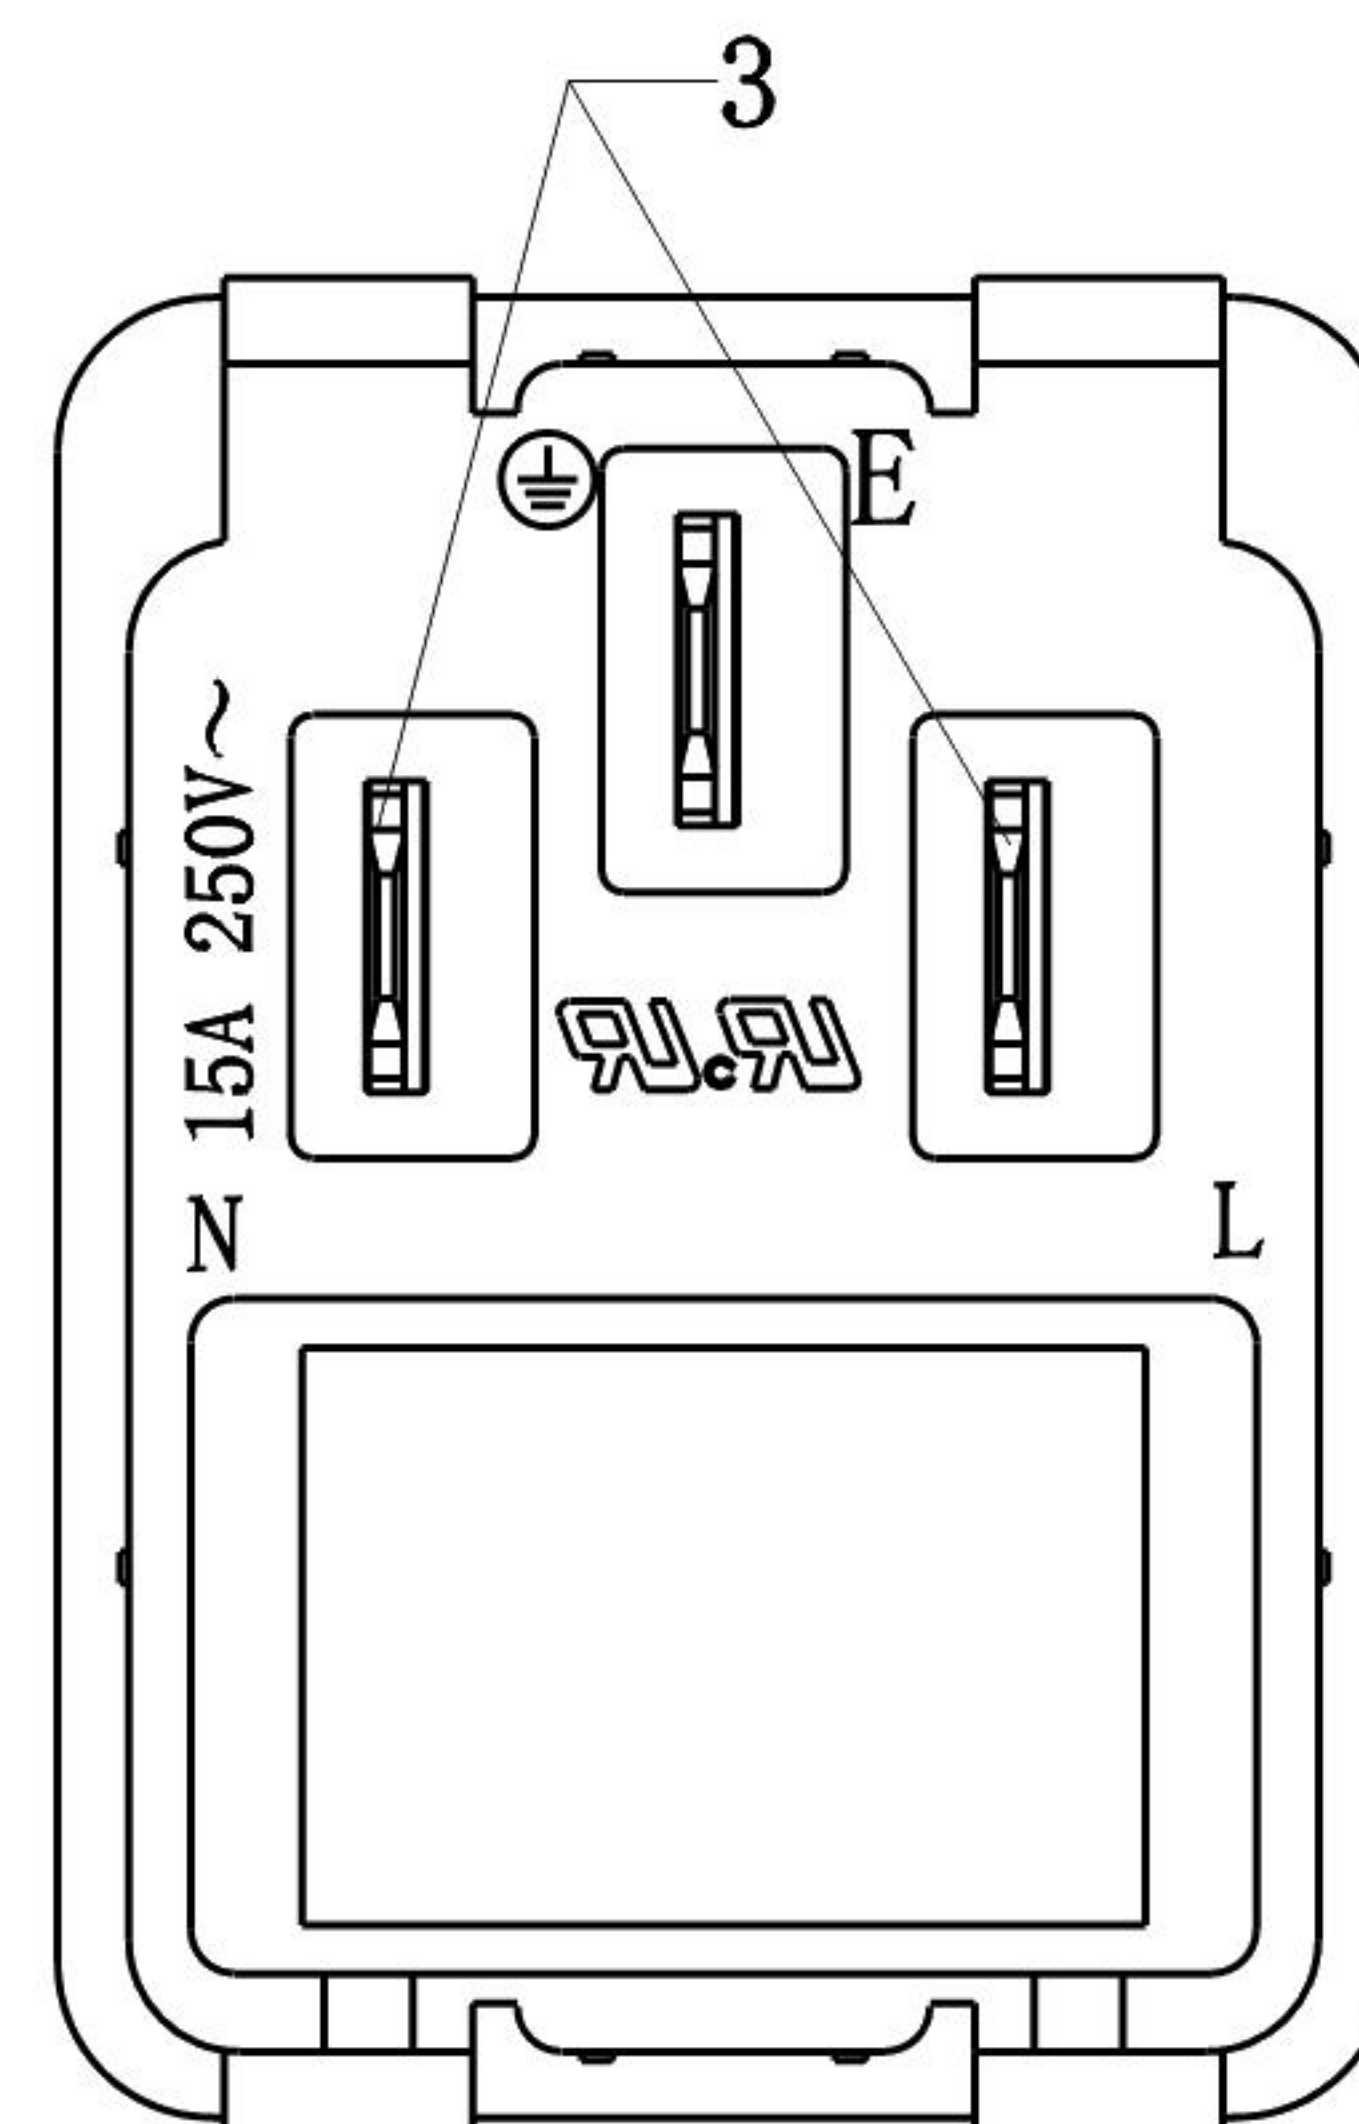
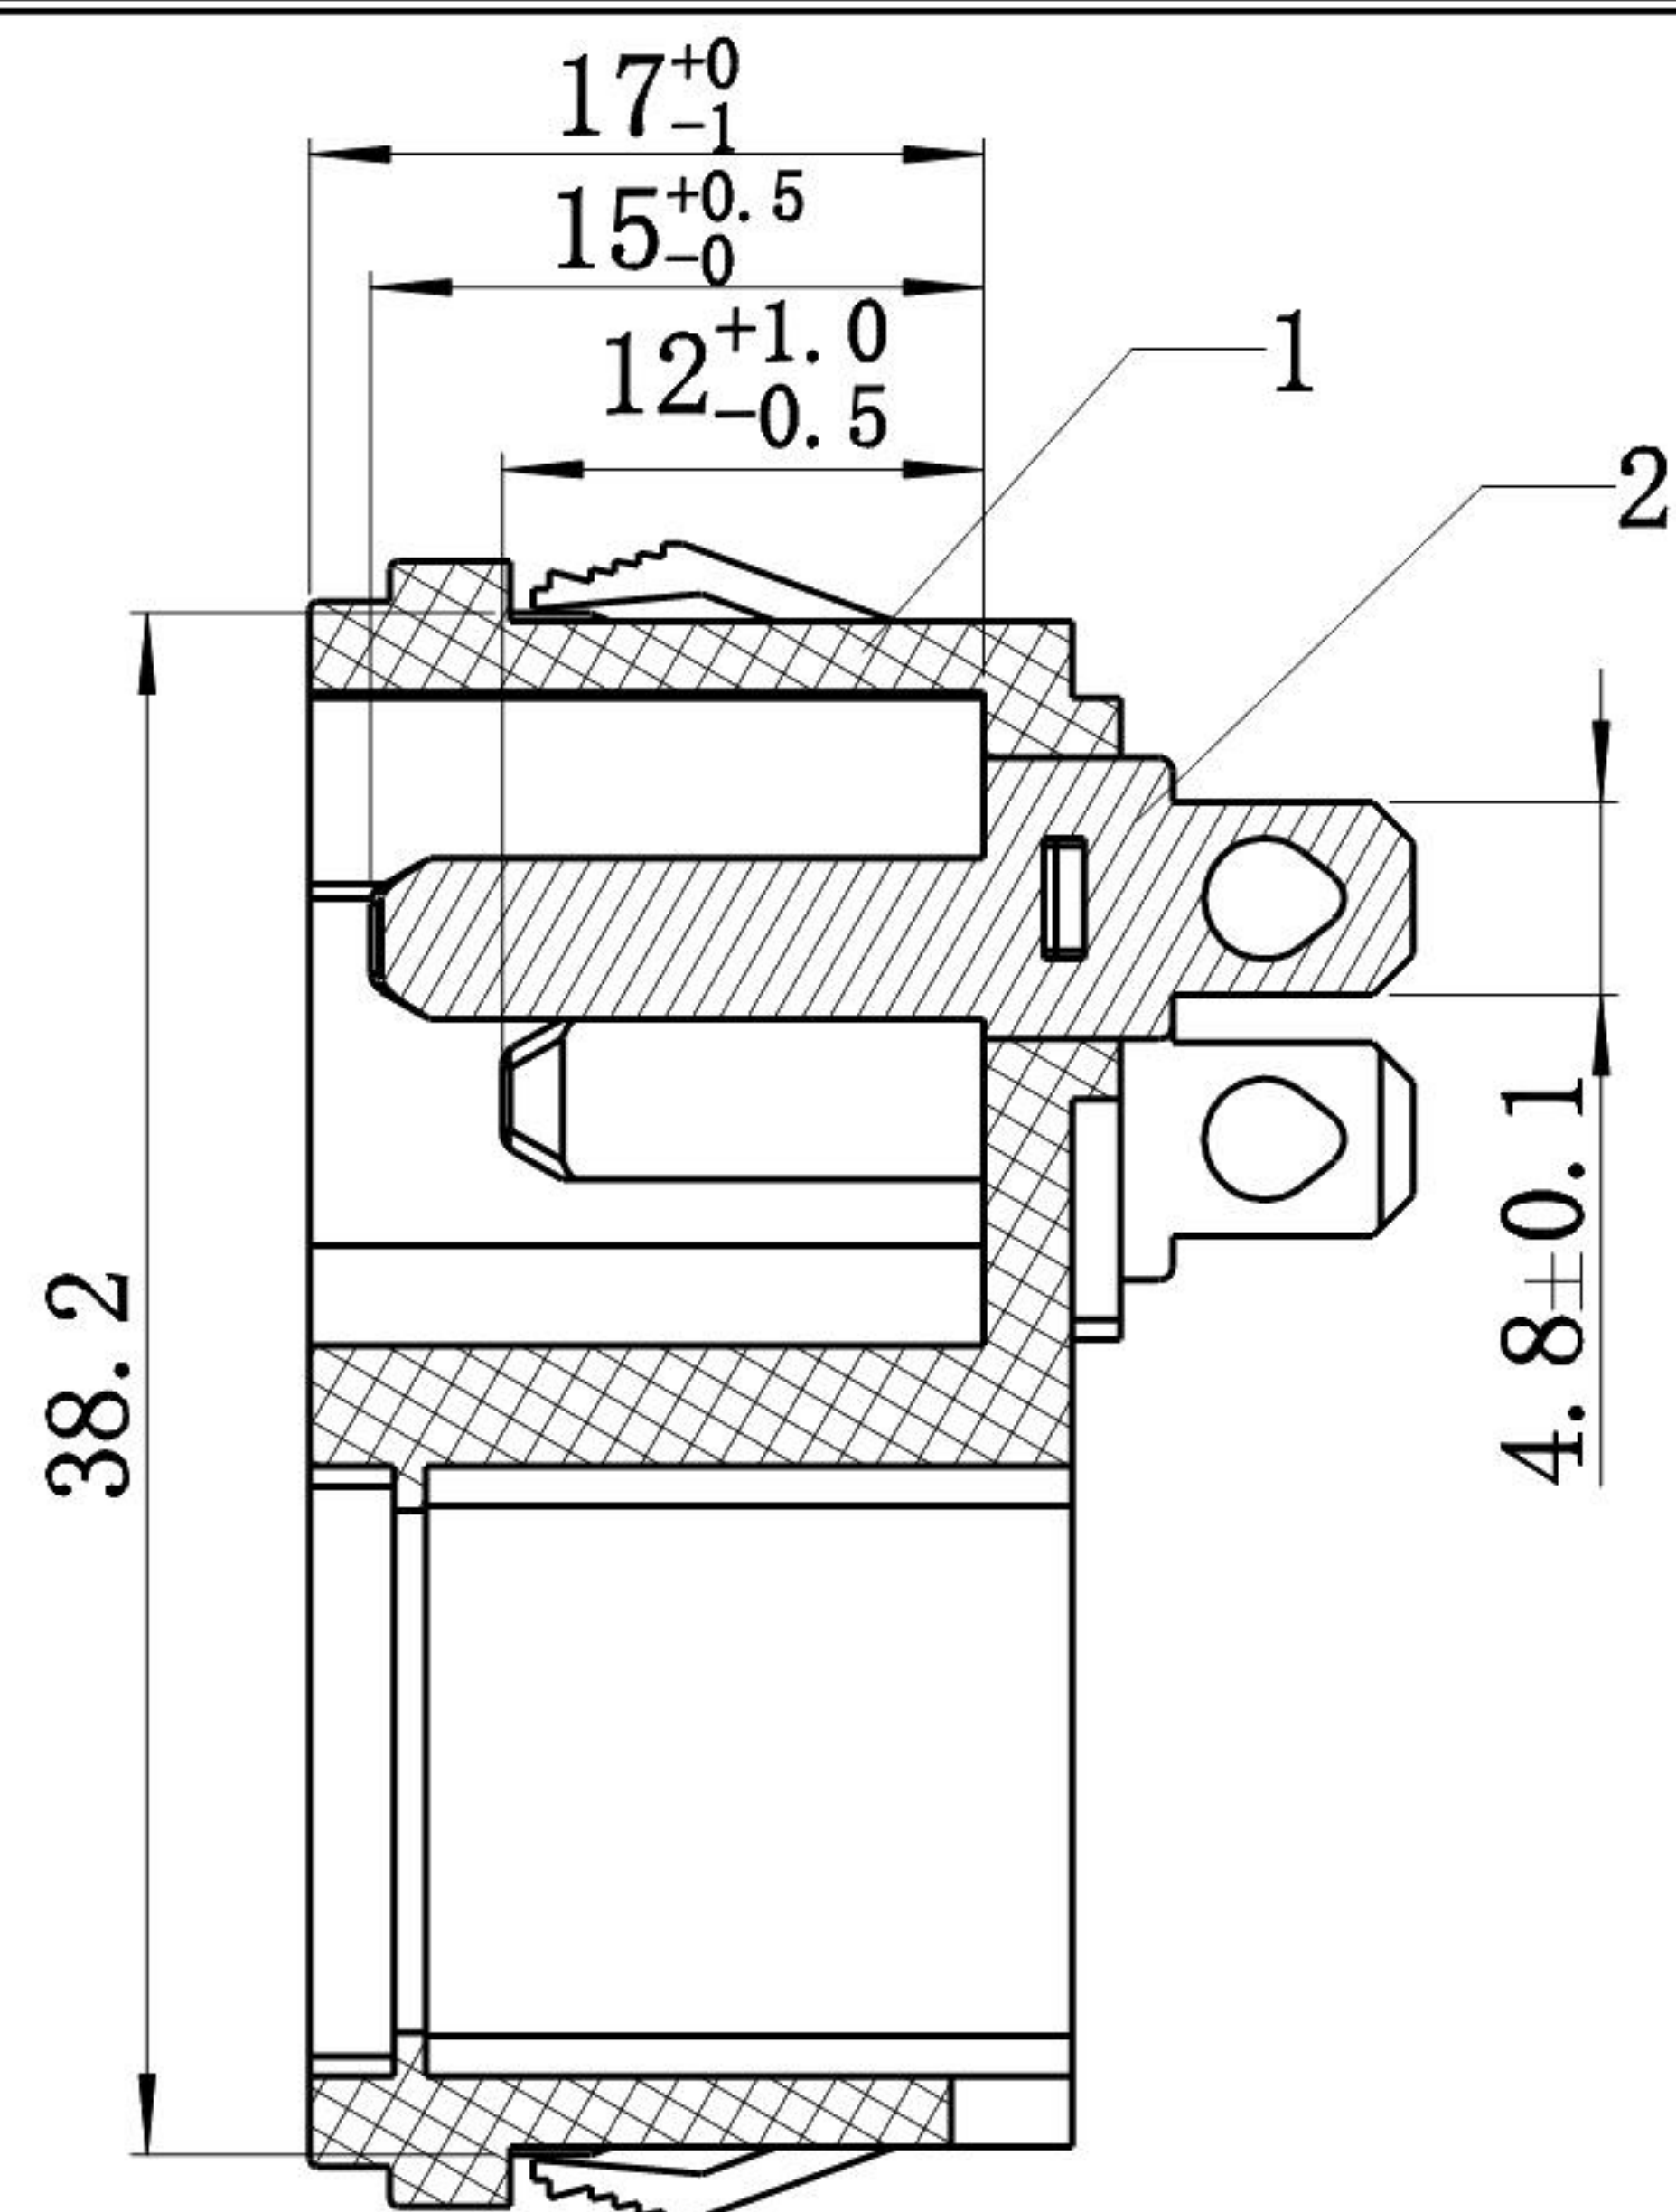


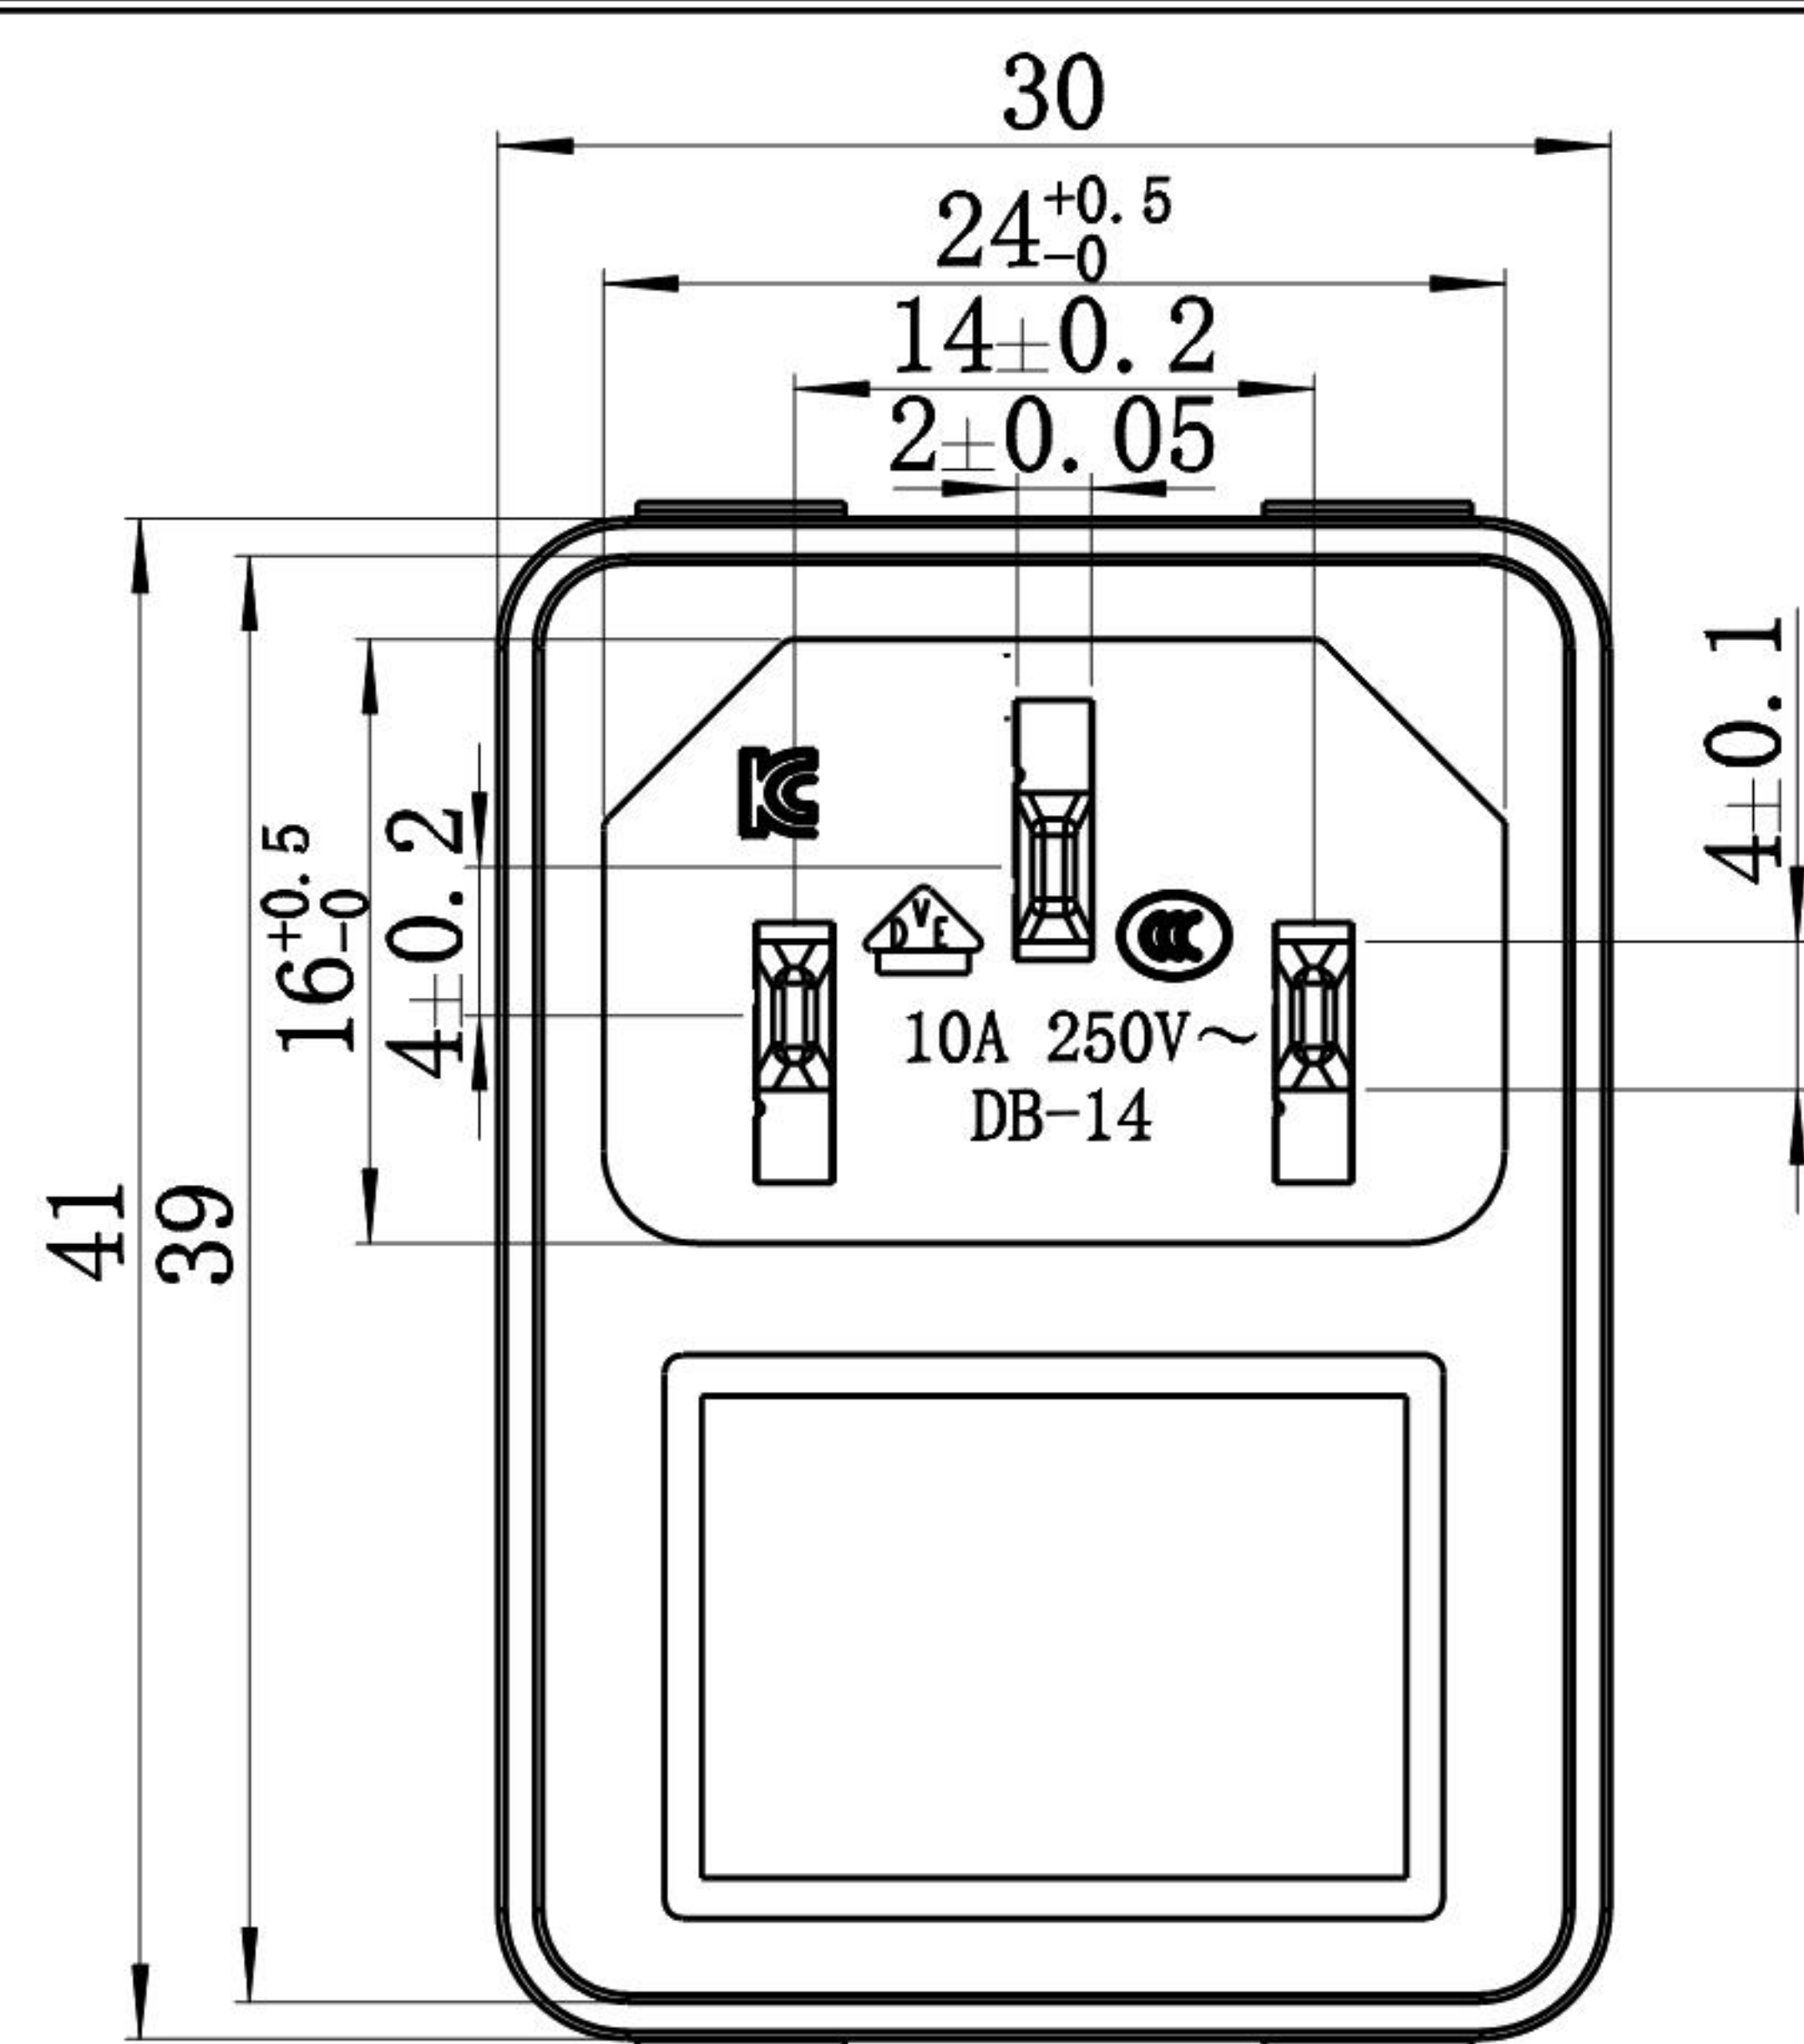

剖面 B-B

Rating:
15A 250V AC UL cUL
10A 250V AC VDE 3C KC
Insert And Extract Force: 20N~50N
Terminal Strength: $\geq 60N$
Operating Life: ≥ 6000 cycles
Withstand Voltage: Between all terminals:2500VAC(50-60Hz)1min
Terminals to Base:3750V AC(50-60Hz)1min
Leakage Current:1mA
Insulation Resistance: $\geq 100M\Omega$ 500V DC
Body Materil: NYLON 94V-2~0

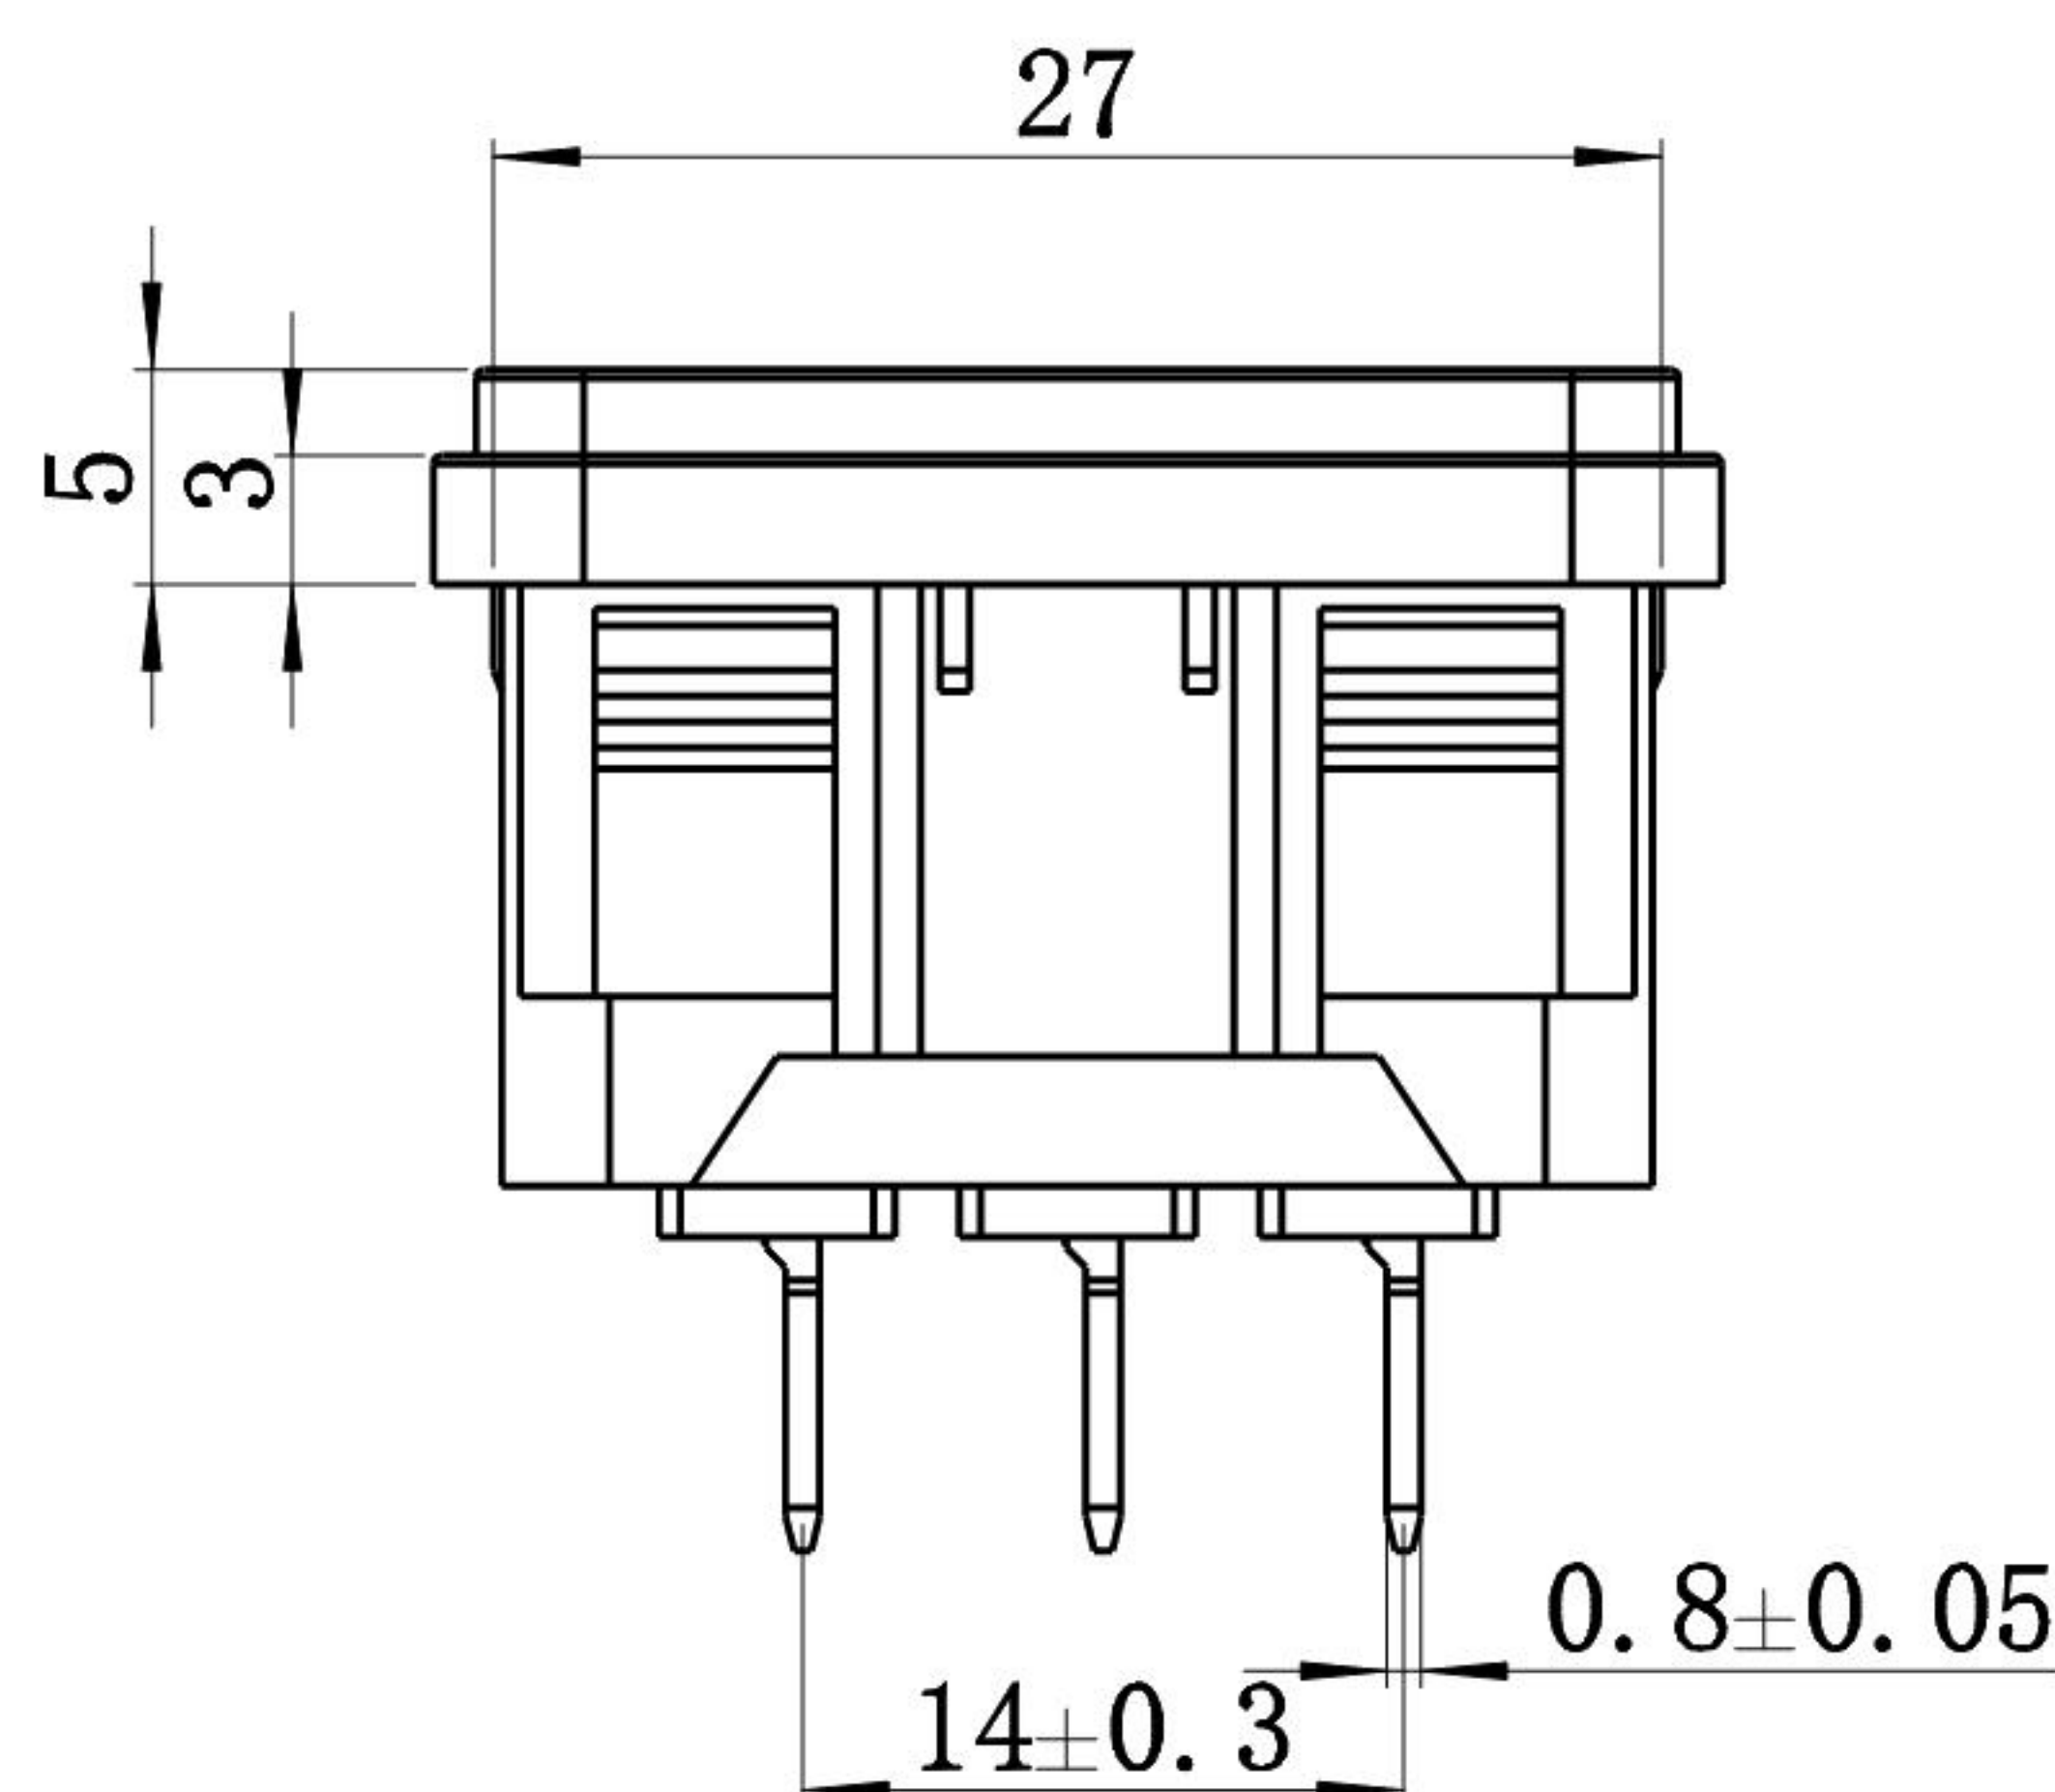

序号	名称	材料	处理	数量	备注
1	DB-14-2+RS塑料件	环阻PA66	黑色	1	
2	DB-14-FL长插销	黄铜	镀锡	1	
3	DB-14-FS短插销	黄铜	镀锡	2	

				普通公差:		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.							
				COMMON TOLERANCE :									
				UP TO 5	±0.20	单位 UNIT	mm	投影 PROJECTED		品名 PRODUCT NAME	Ac Inlet C14型	比例 SCALE	Free
				ABOVE 5 TO 30	±0.30	绘图 DRAWN BY	金泽杰	核对 CHECKED BY		型号 MODEL NO.	DB-14		
				ABOVE 30	±0.50								
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期 DATE	2022/7/17	核准 APPROVAL BY		料号 PART NO.	DB-14-2F+RS		