

Rating:

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N

Operating Life: ≥6000 cycles



Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

Terminals to Base: 3750V AC (50-60Hz) 1min


Leakage Current: 1mA

Insulation Resistance: >100MΩ 500V DC

Body Material: PBT 94V-2~0

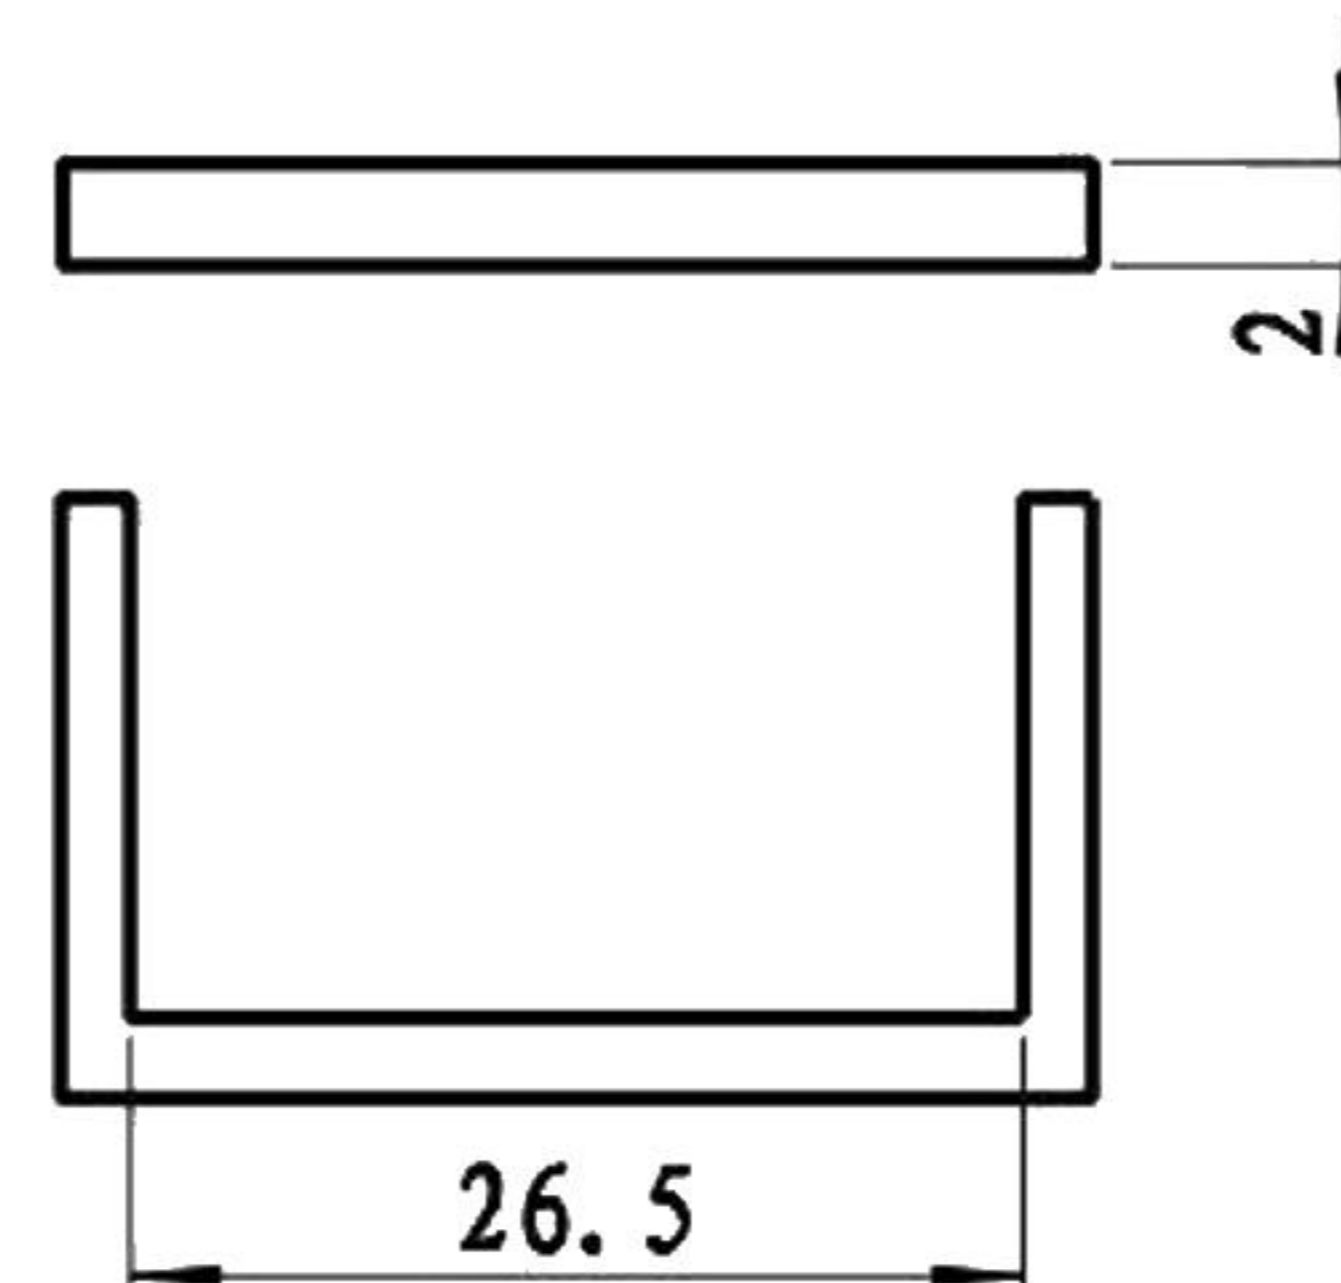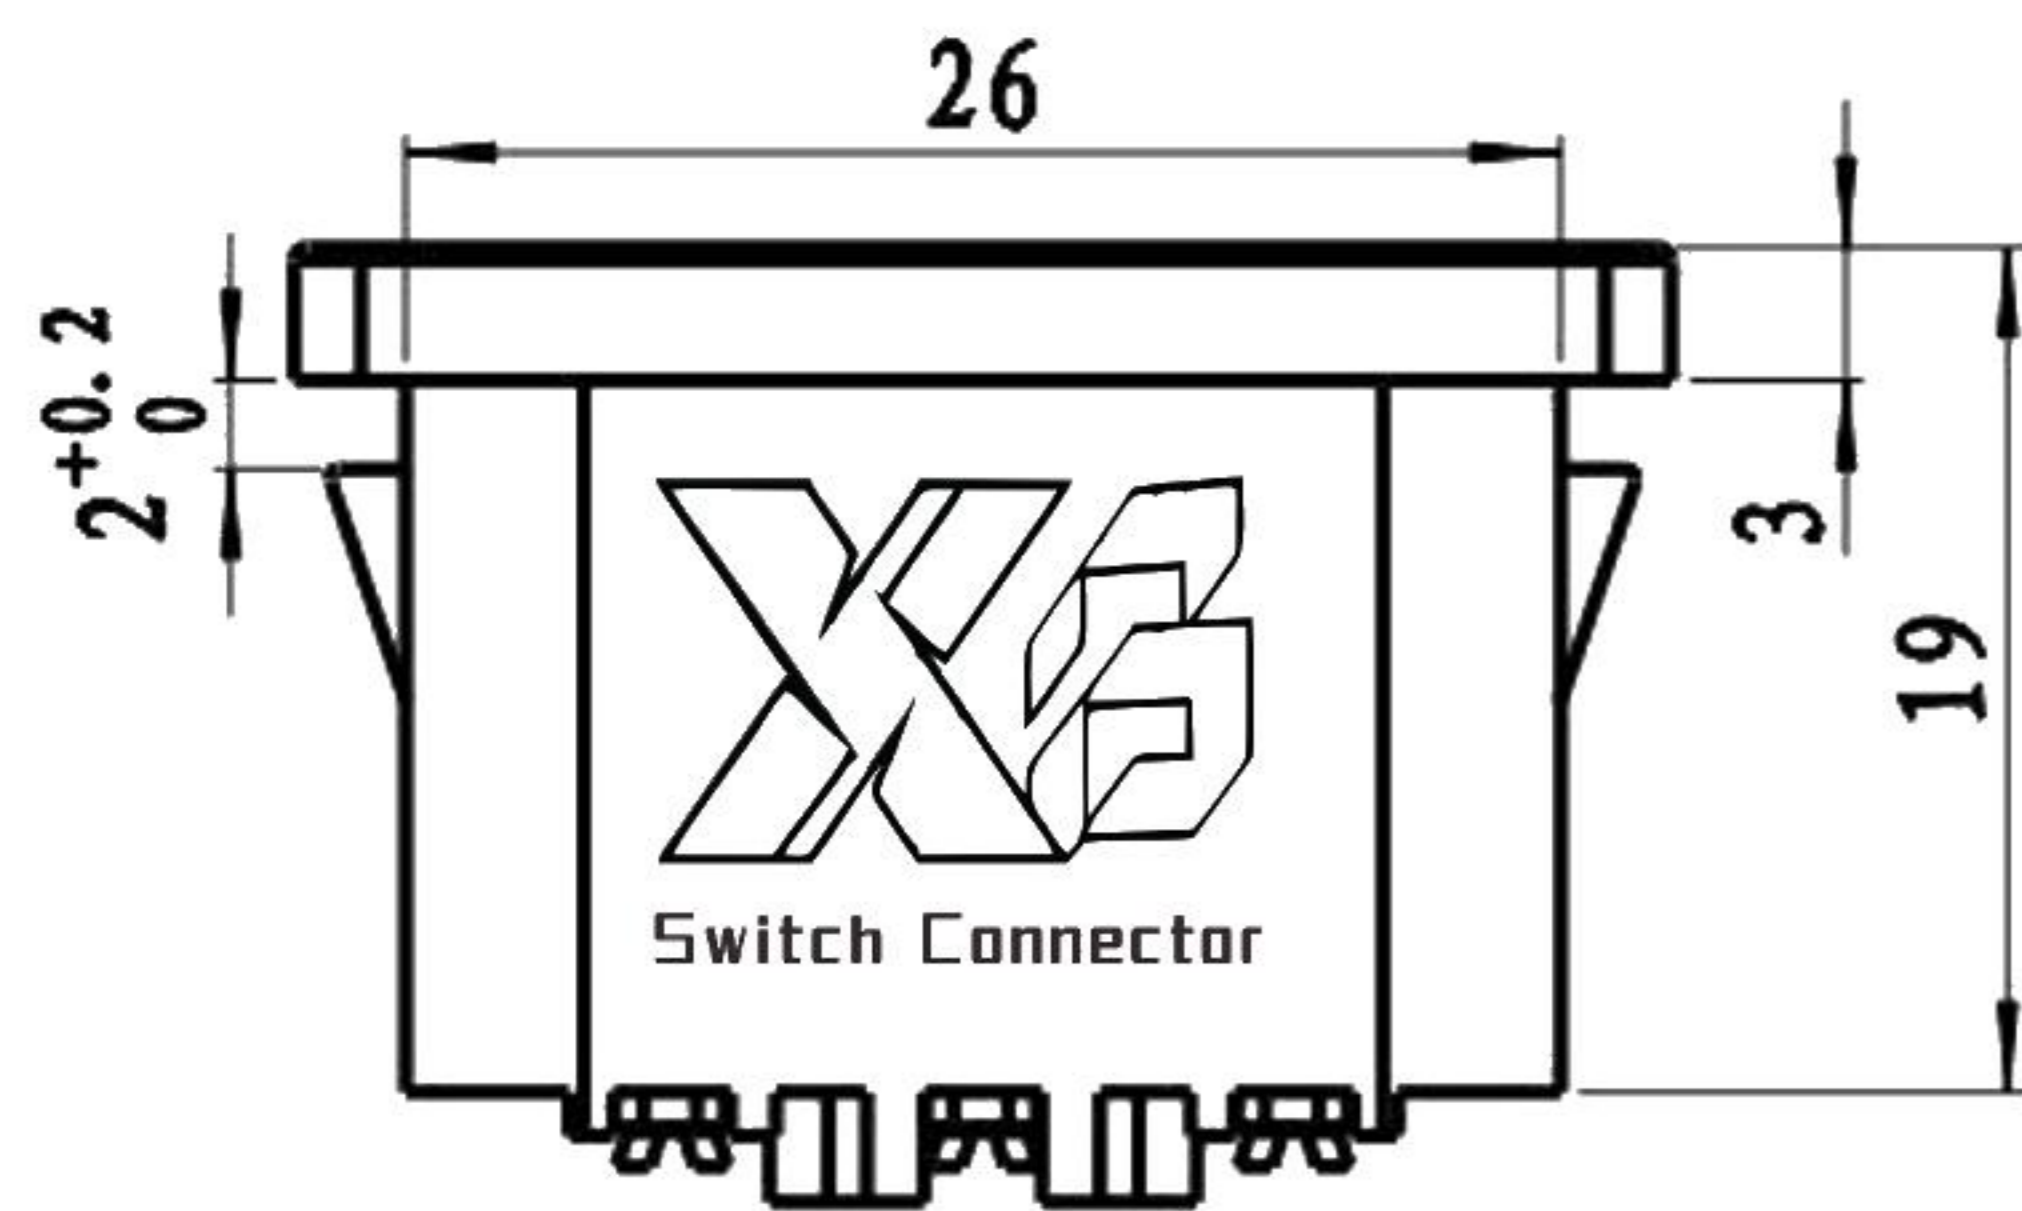

PANEL CUT-OUT

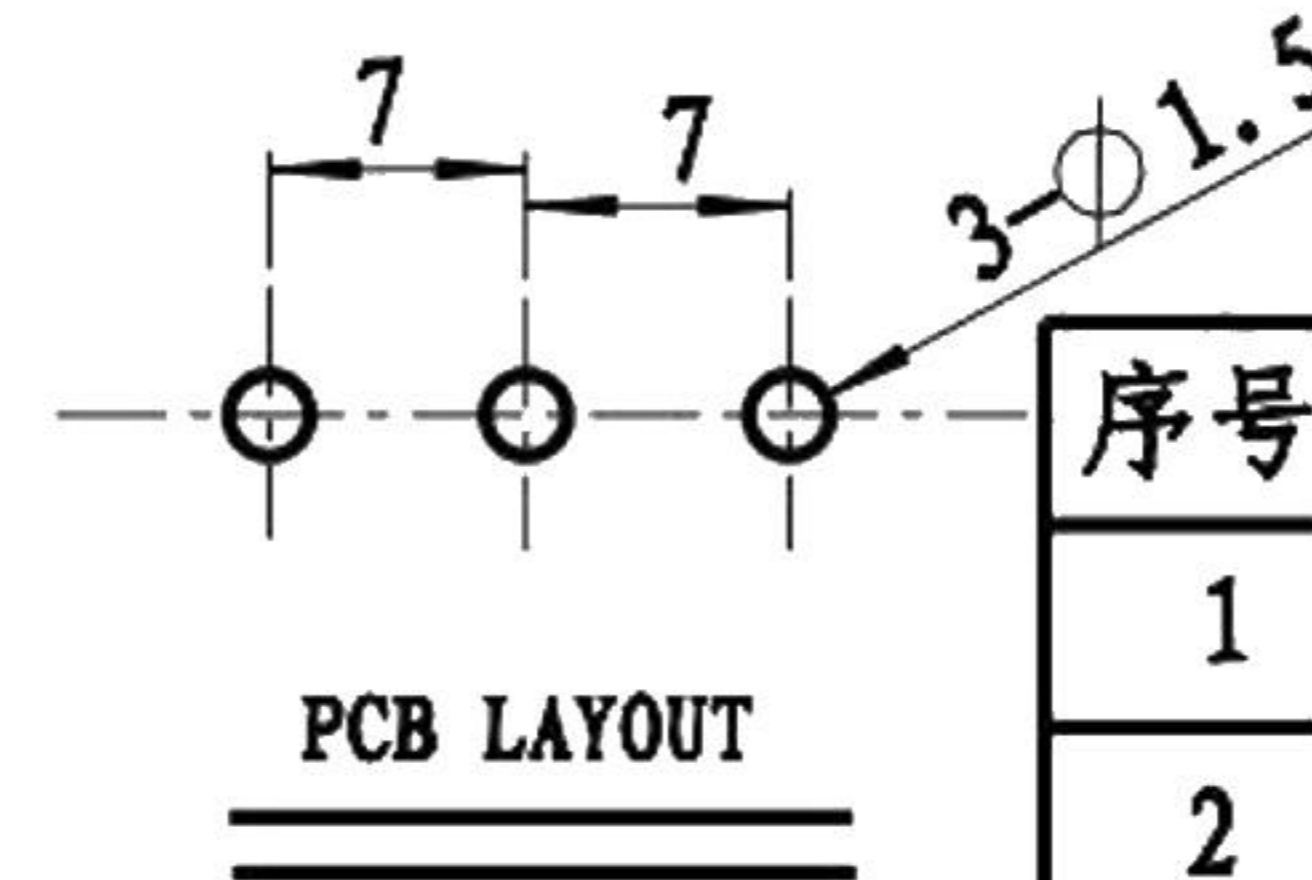

PCB LAYOUT

序号	名称	材料	处理	数量	备注
1	DB-14-3P塑料件	PBT	黑色	1	
2	DB-14-PL (L) 长插销	黄铜	镀镍	1	Plating Thickness 40u" -80u"
3	DB-14-PS (S) 短插销	黄铜	镀镍	2	Plating Thickness 40u" -80u"
4	DB-14-10L	黄铜	镀锡	1	Plating Thickness >80u"
5	DB-14-10S	黄铜	镀锡	2	Plating Thickness >80u"

55*43*23.5cm箱, 50只*40吸盒装=2k件, 净重:17.2 毛重:19.7=KG,

普通公差:

COMMON TOLERANCE :

UP TO 5 ±0.20

ABOVE 5 TO 30 ±0.30

ABOVE 30 ±0.50

ANGULAR ±5°

单位

mm

绘图

金泽木

日期

2022/4/15

投影



核对

张群龙

核准

周培雷

品名

Ac Inlet C14型

型号

--- i/DB-14

料号

DB-14-3P-11(2.0)-ZP

比例

Free



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. DATE REVISION DESCRIPTION ISSUE