
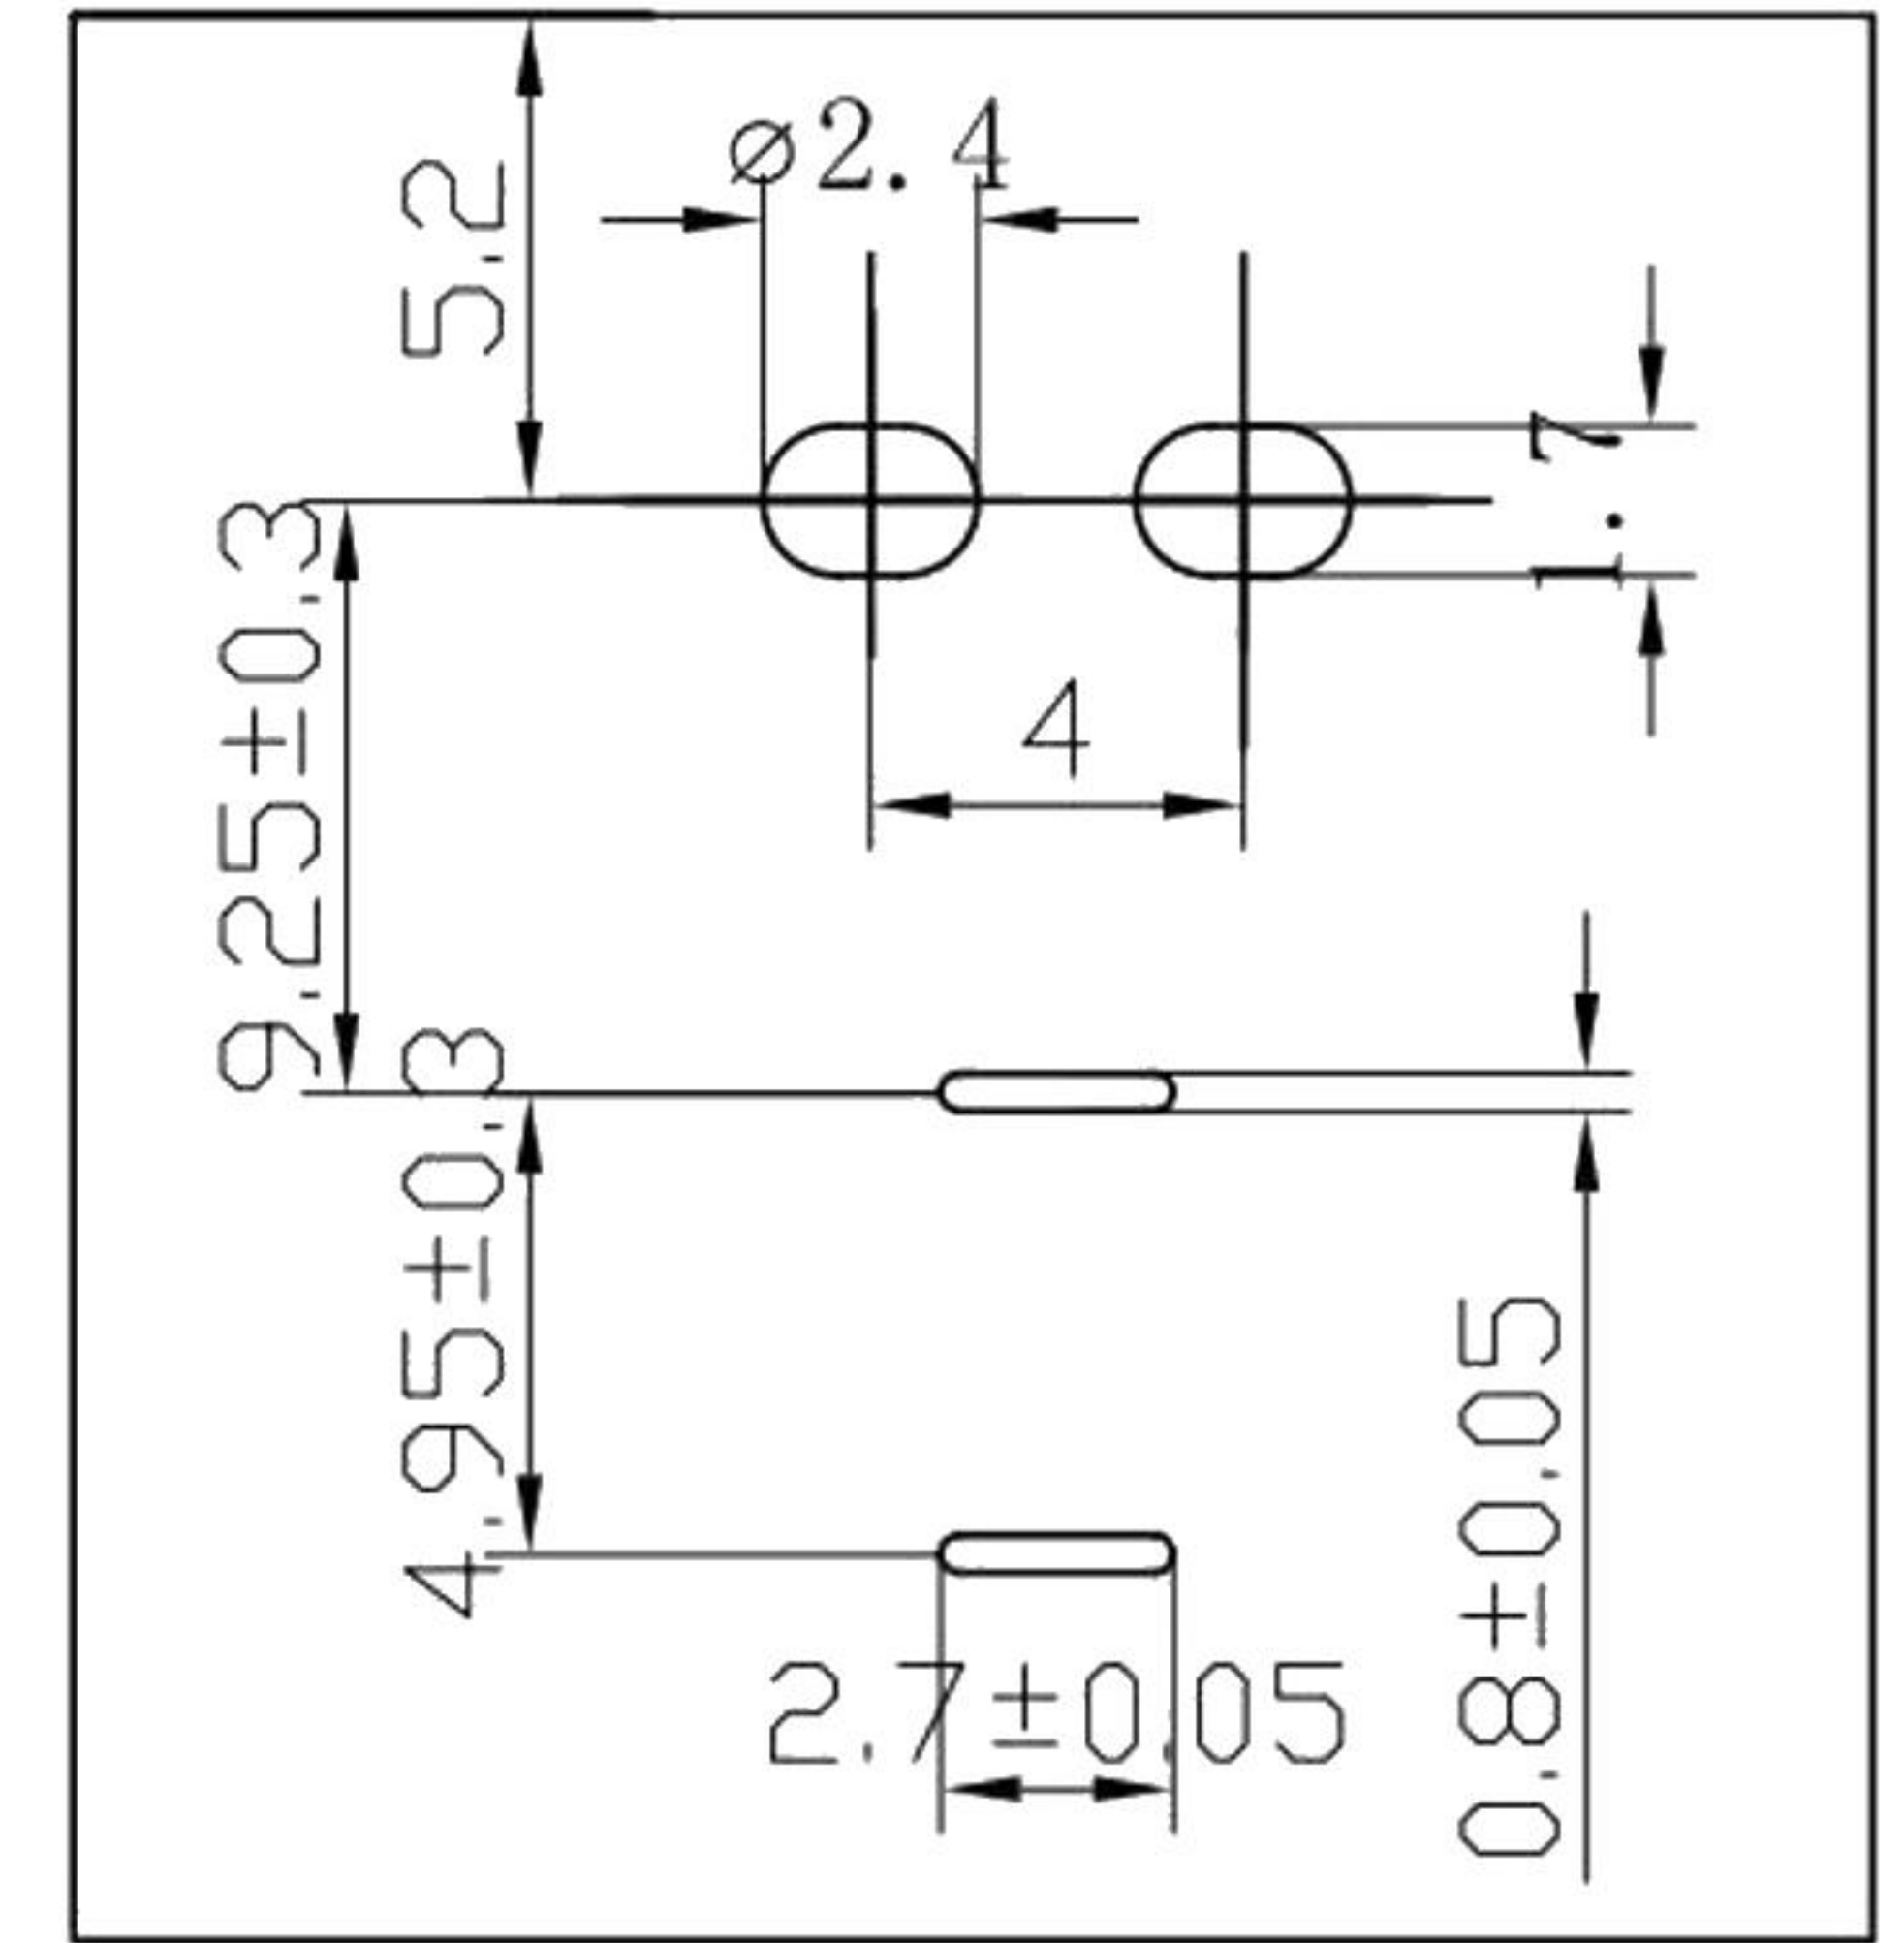
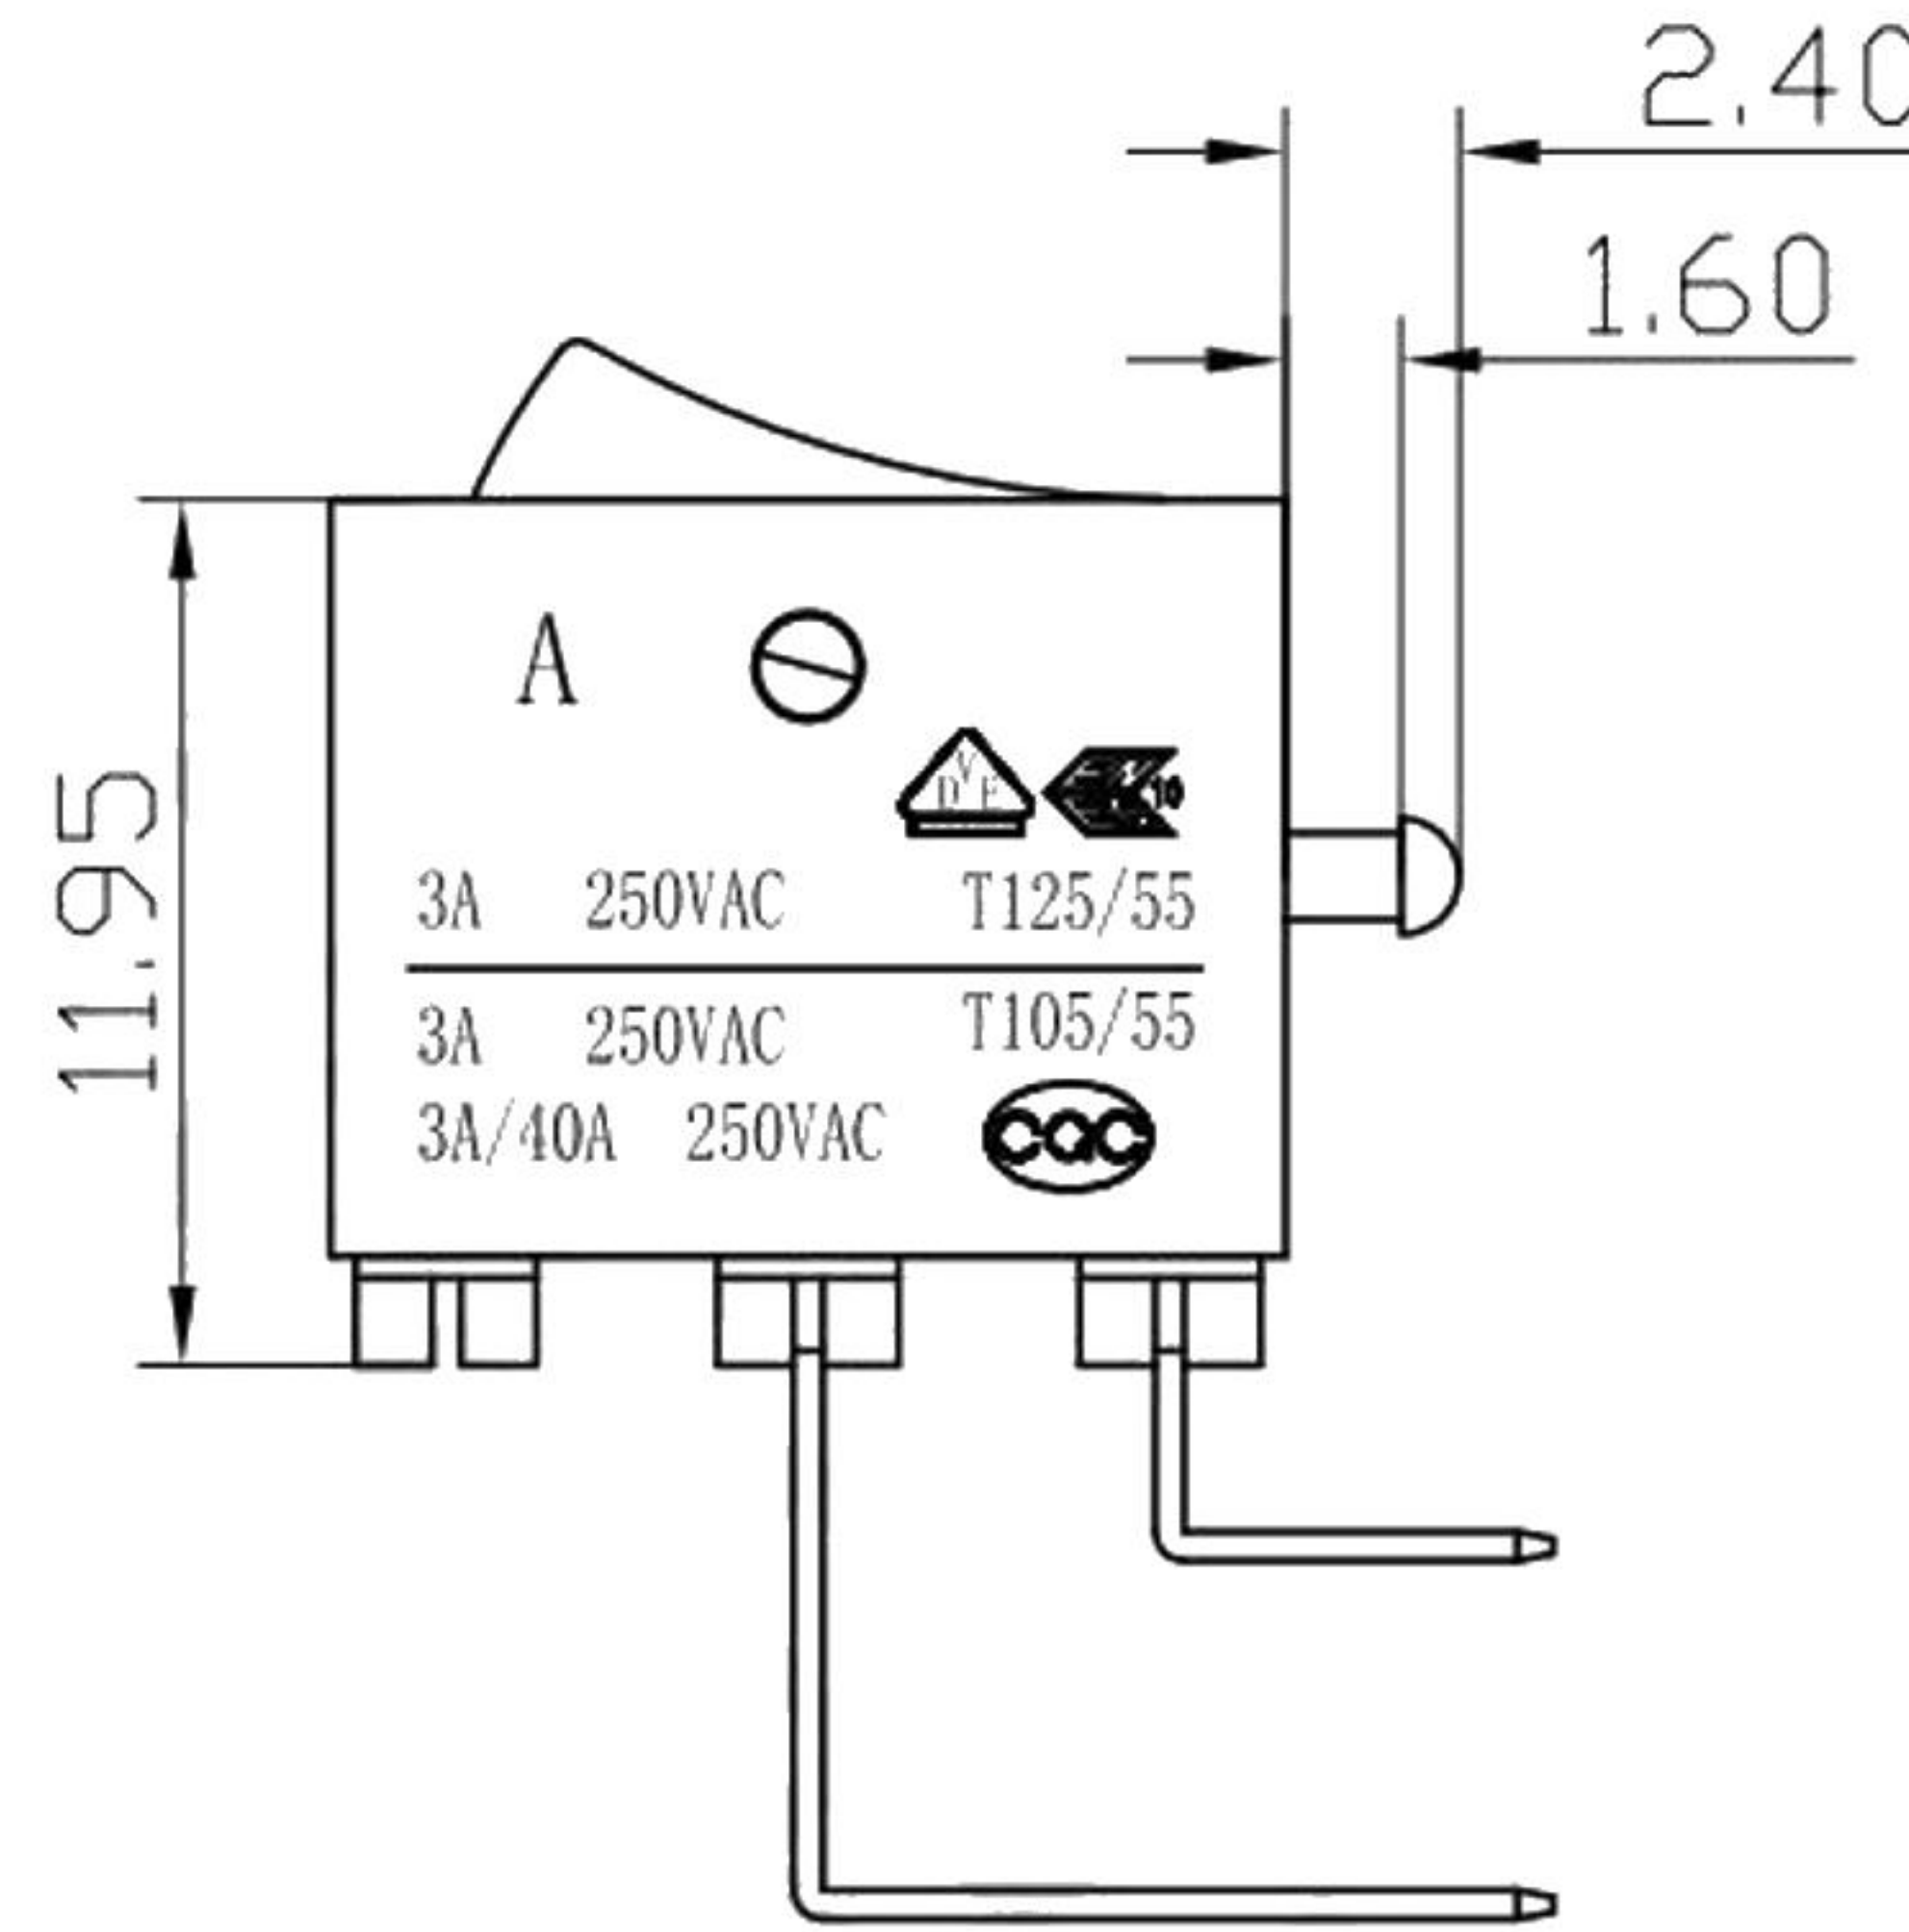
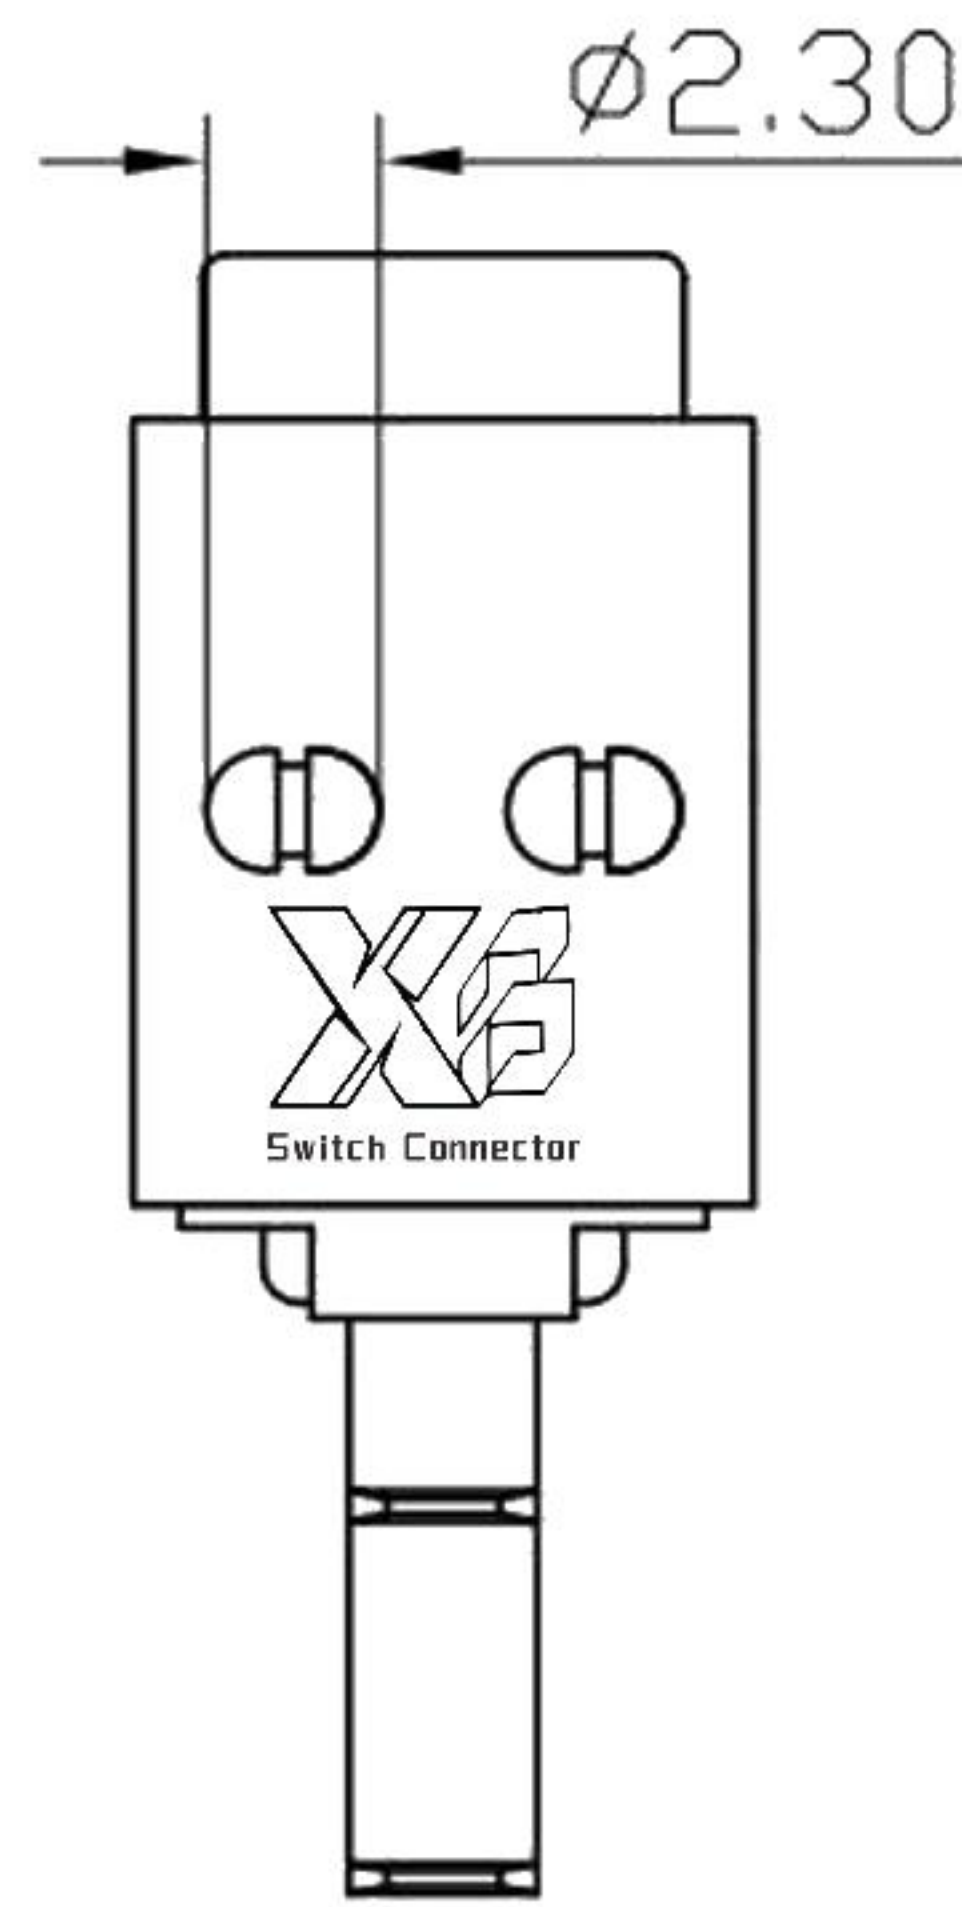
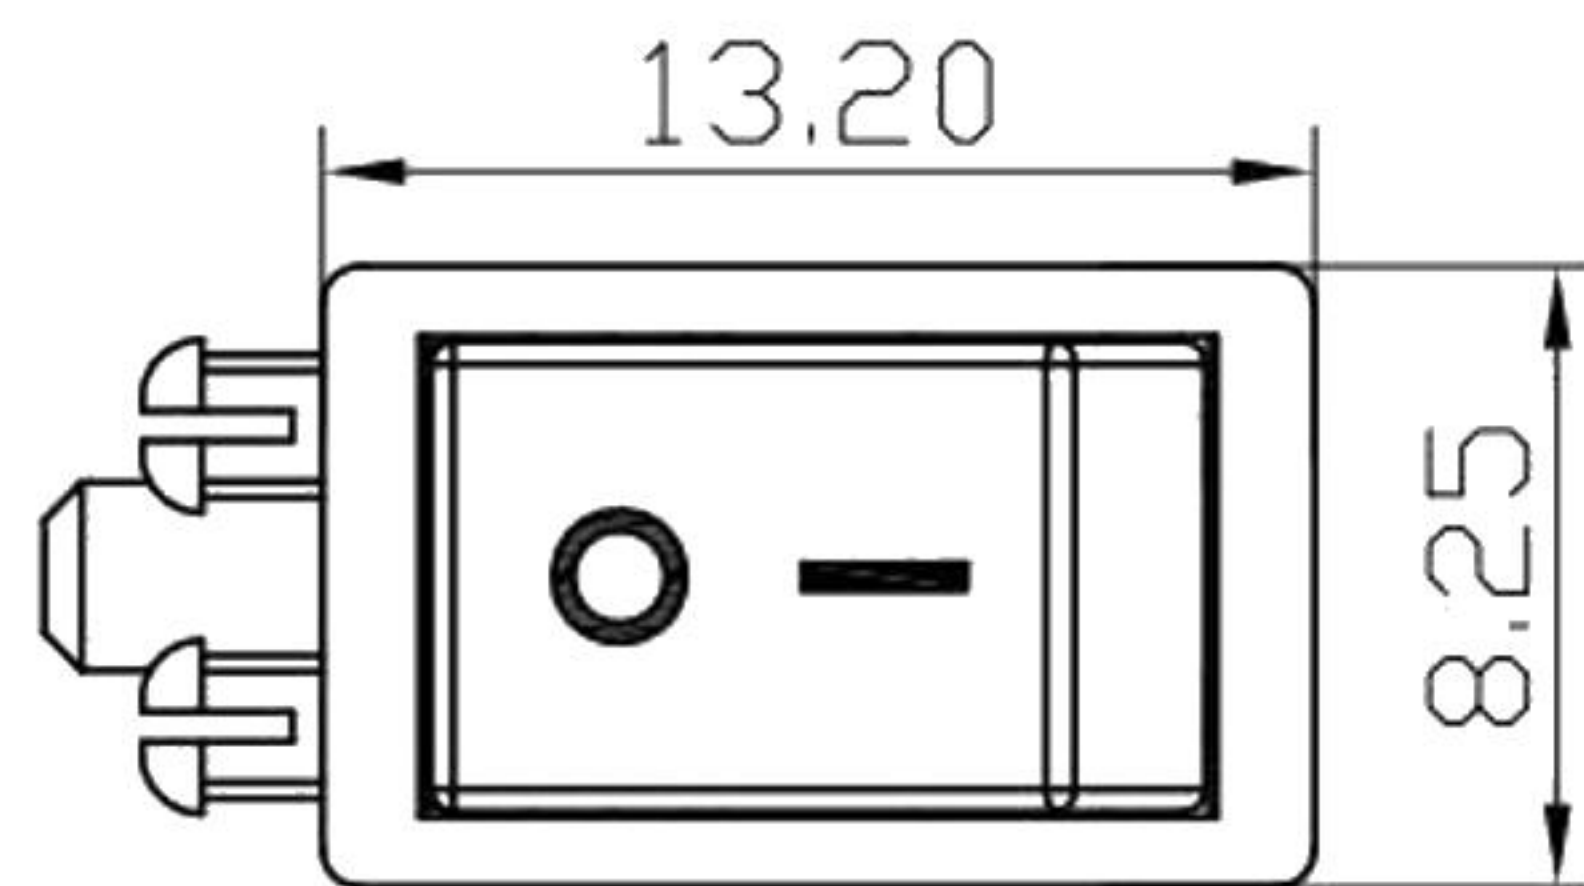
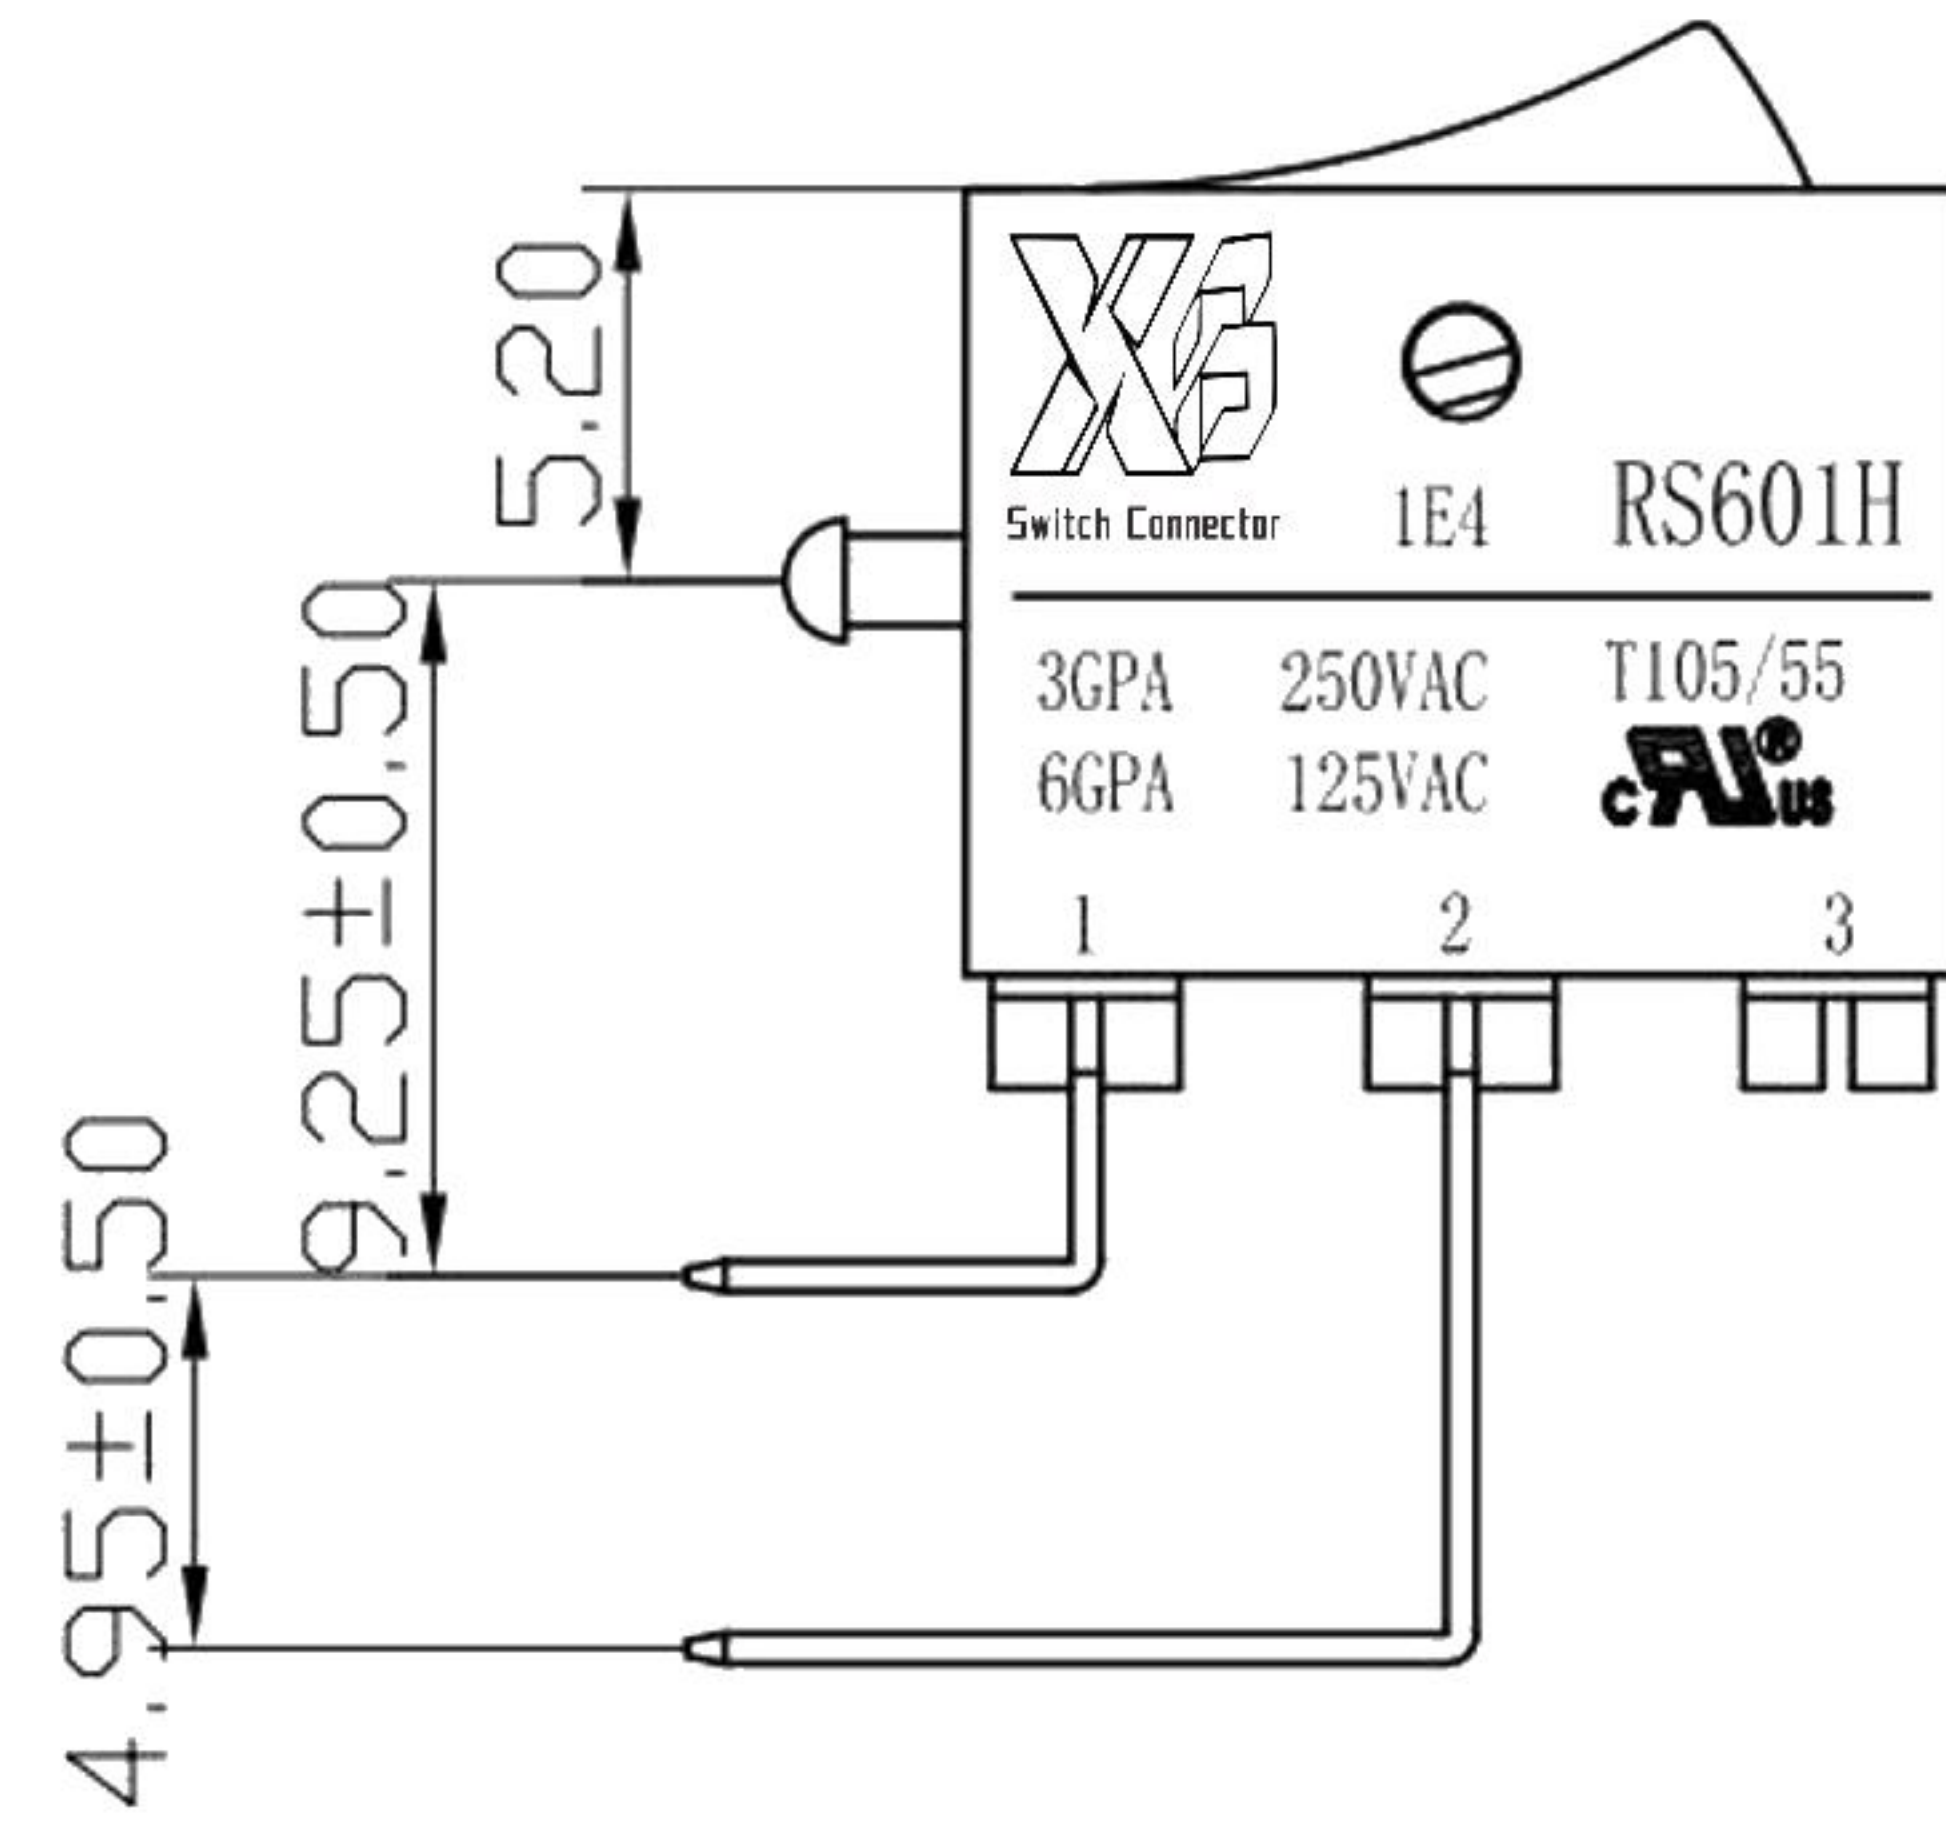


安装孔尺寸

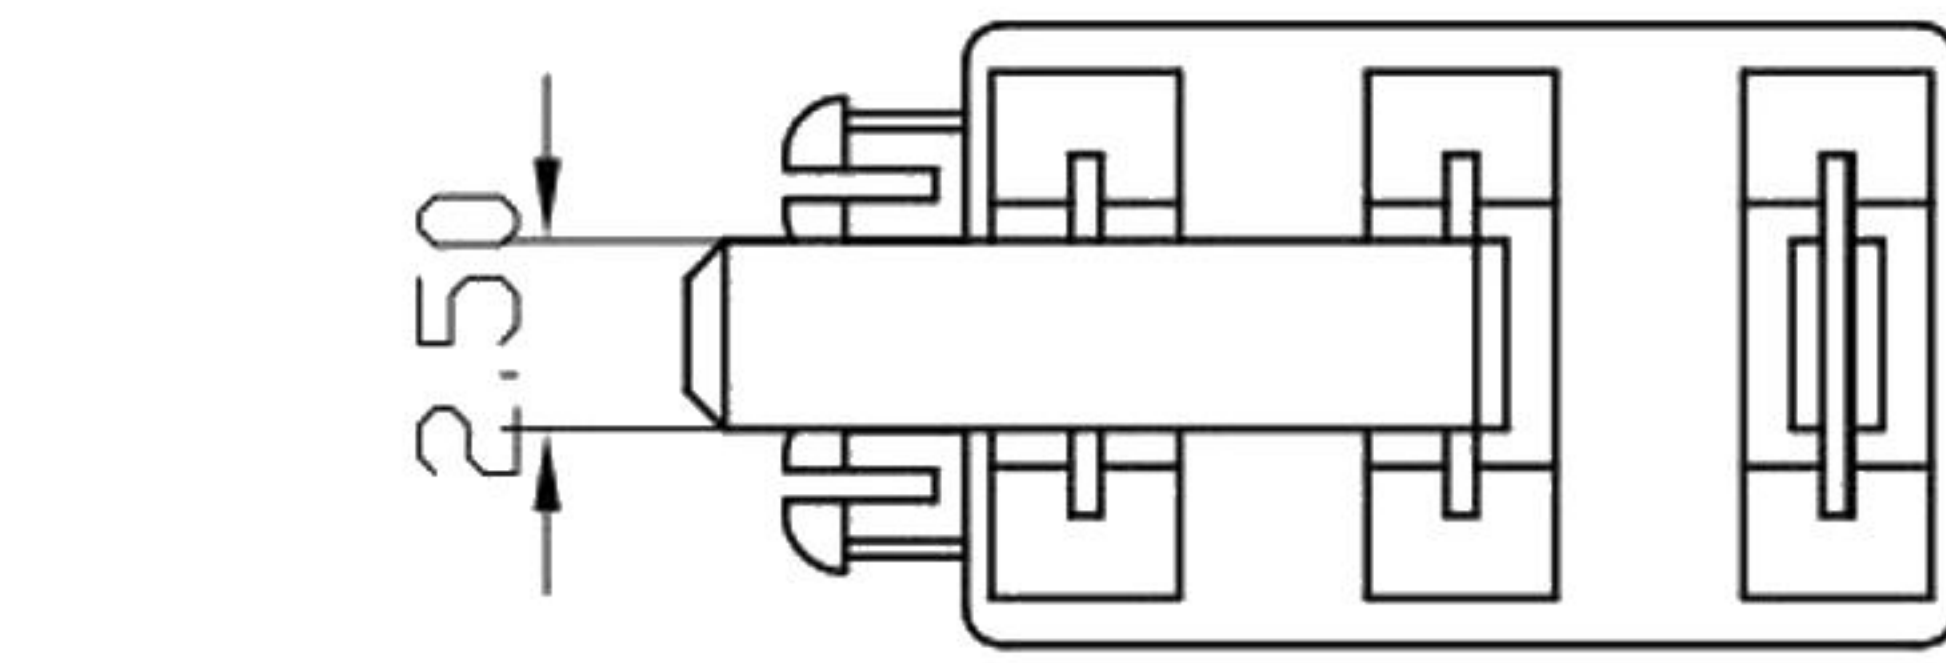

NOTES:

1. Rating:

VDE ENEC 3A 250VAC T125/55

UL cUL 6GPA 125VAC/3GPA 250VAC T105/55

CQC 3A 250VAC, 3A/40A 250VAC T105/55

KC 3A 250VAC T85

2. Circuit Diagram: 2P ON-OFF

3. Terminal Strength: $\geq 40N$

4. Electrical life: ≥ 10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min Terminals to Button: 3000VAC 1min Leakage Current: 1mA


6. Current resistance: $\leq 50m\Omega$ (initial)

7. Insulation resistance: $\geq 100M\Omega$


8. Body Material: NYLON 66 94V-0~2

7	基座	1	环保阻燃PA66		
6	弯端部件	1	0.4mm黄铜带 +复合银触点	镀锡	
5	中端	1	0.4mm黄铜带	镀锡	
4	跳片部件	1	0.4mm黄铜带 +复合银触点	镀银	
3	套管	1	0.3mm拉伸钢		
2	弹簧	1	$\phi 0.3$ 弹簧钢丝	发黑	
1	按钮	1	环保阻燃PA66		
序号	名称	数量	材料	处理	备注

SWITCHING CIRCUIT

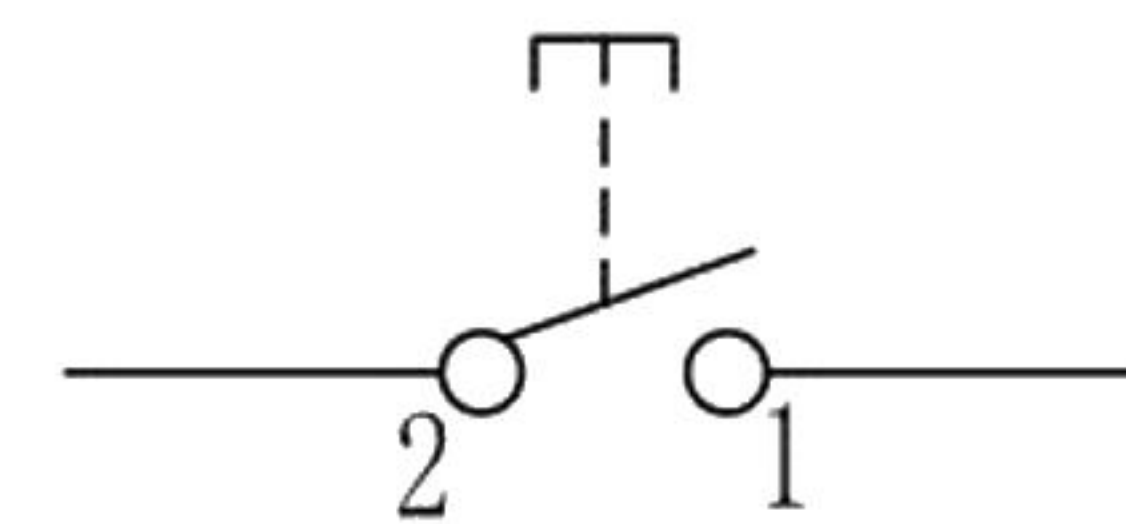

51*31*21cm箱, 100只*40塑盒装=4K件, 净重: 6.4 KG, 毛重: 7.9=KG,

A4				普通公差:		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	干 方 毅	核 对 CHECKED BY	吴 飞	型 号 MODEL NO.	RS601H3A-1010017BB-ZP		
				ABOVE 30	±0.50								
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期 DATE	2021.10.07	核 准 APPROVAL BY	周 培 雷	图 号 DWG NO.	/RS601H		