
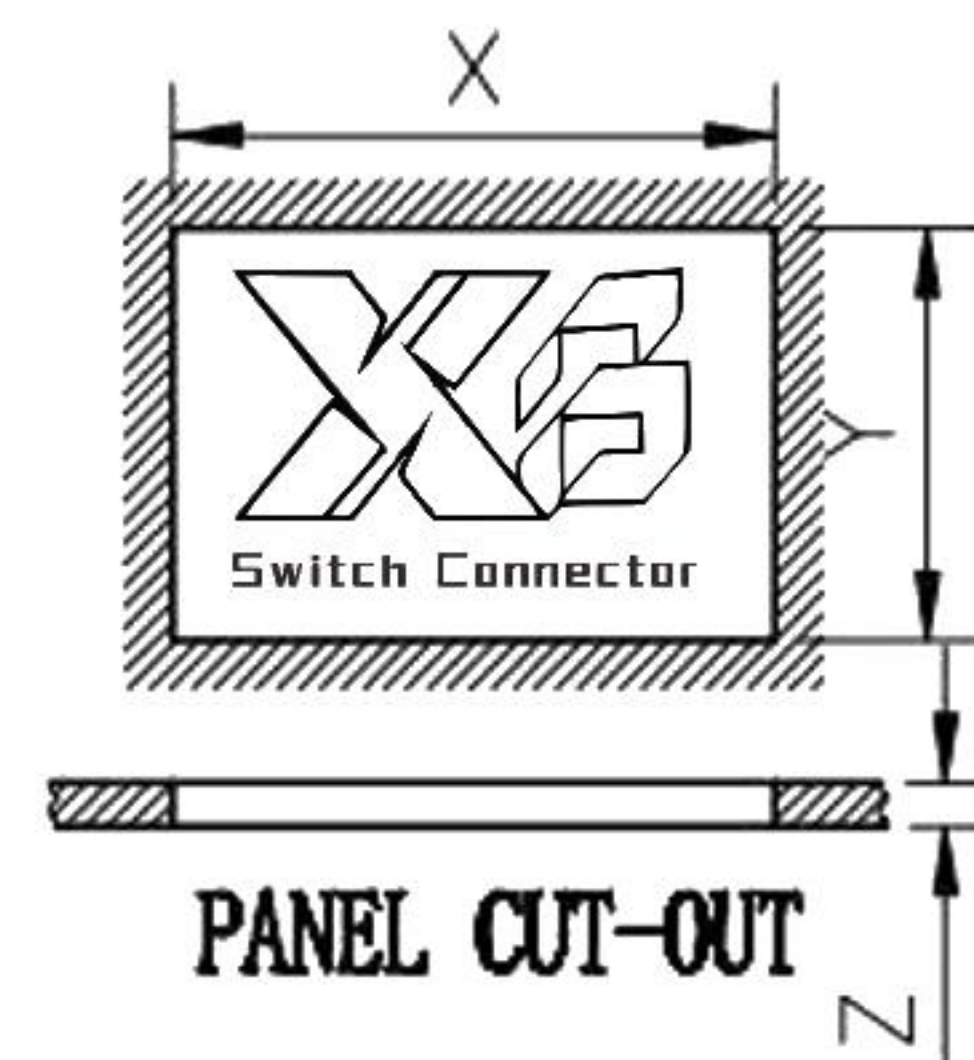
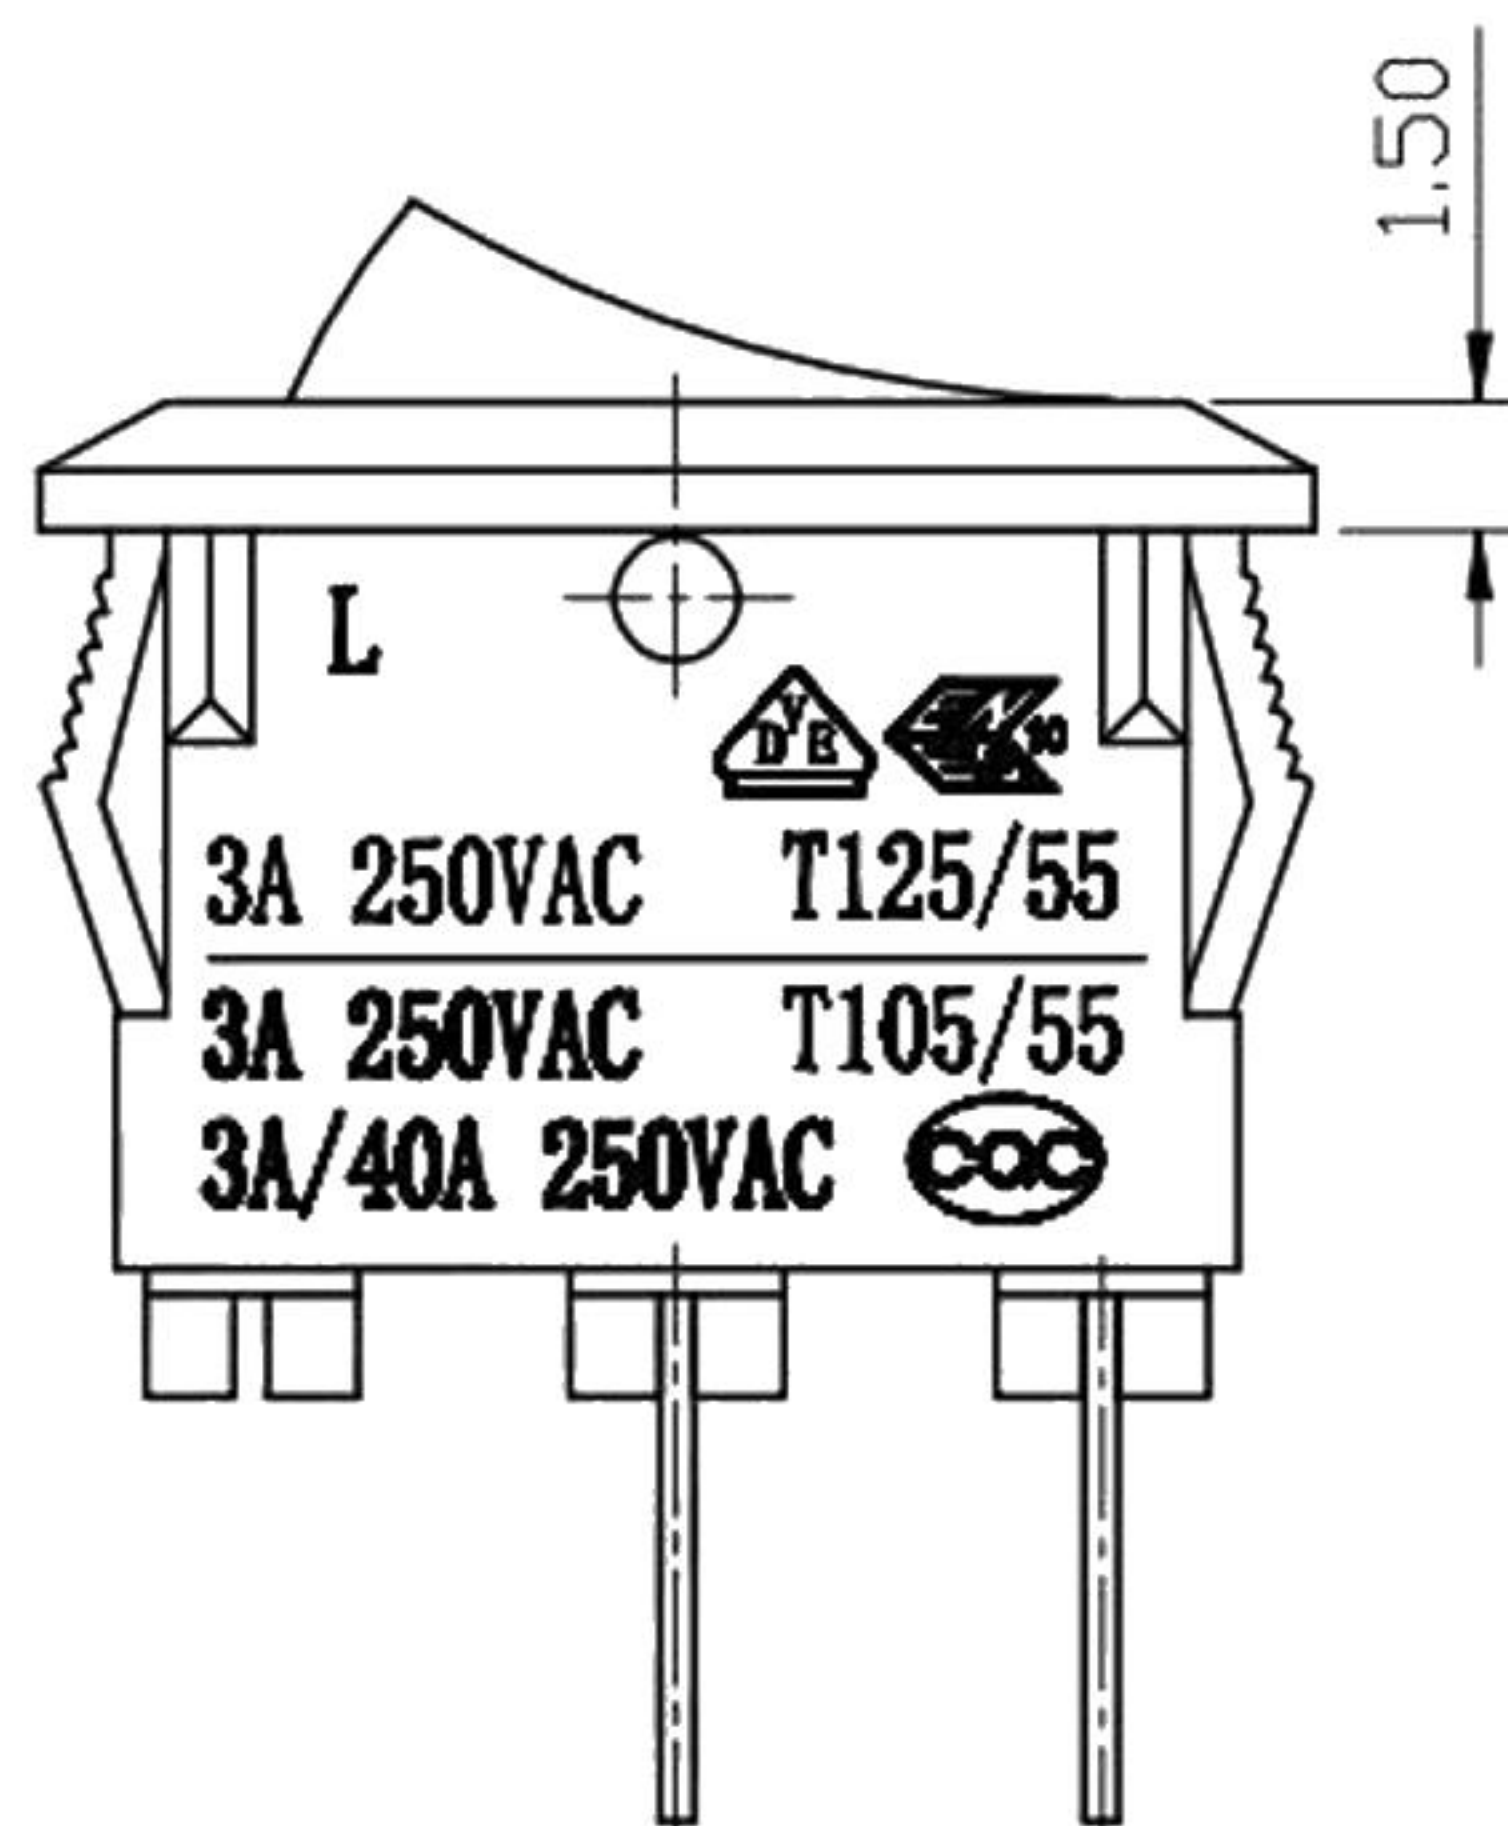
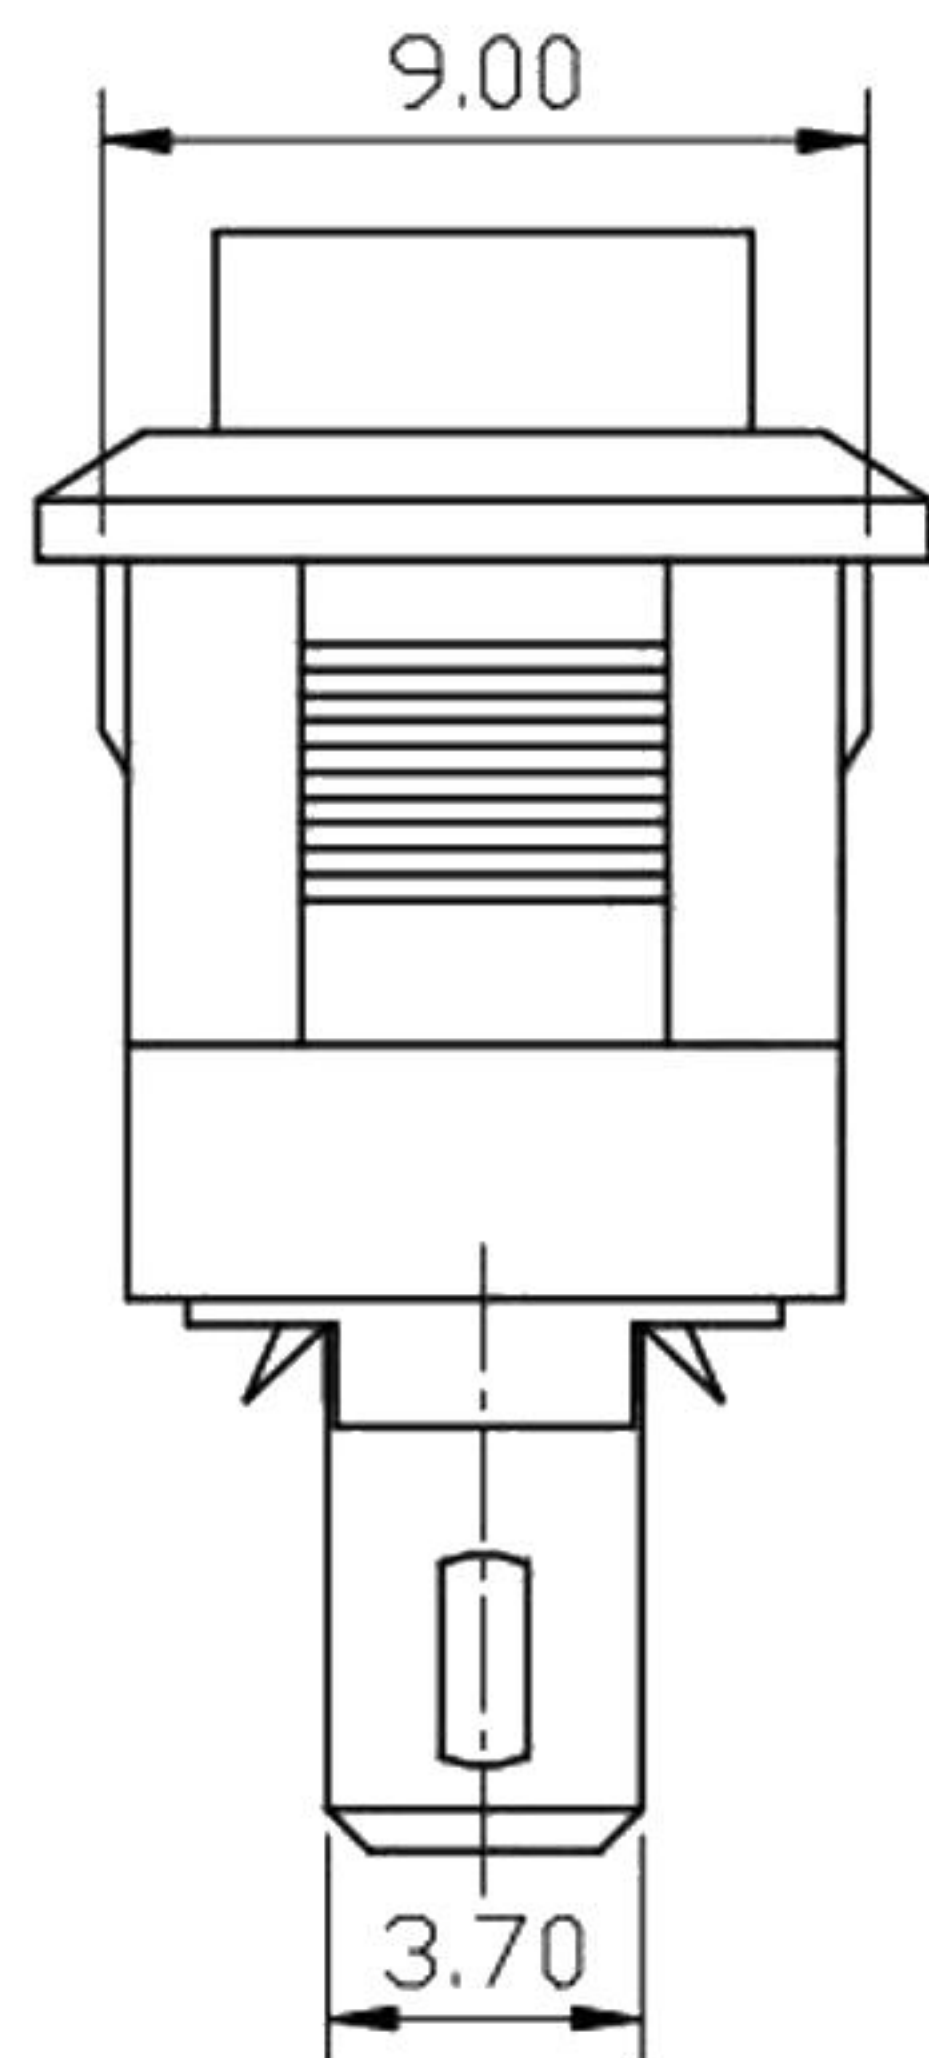
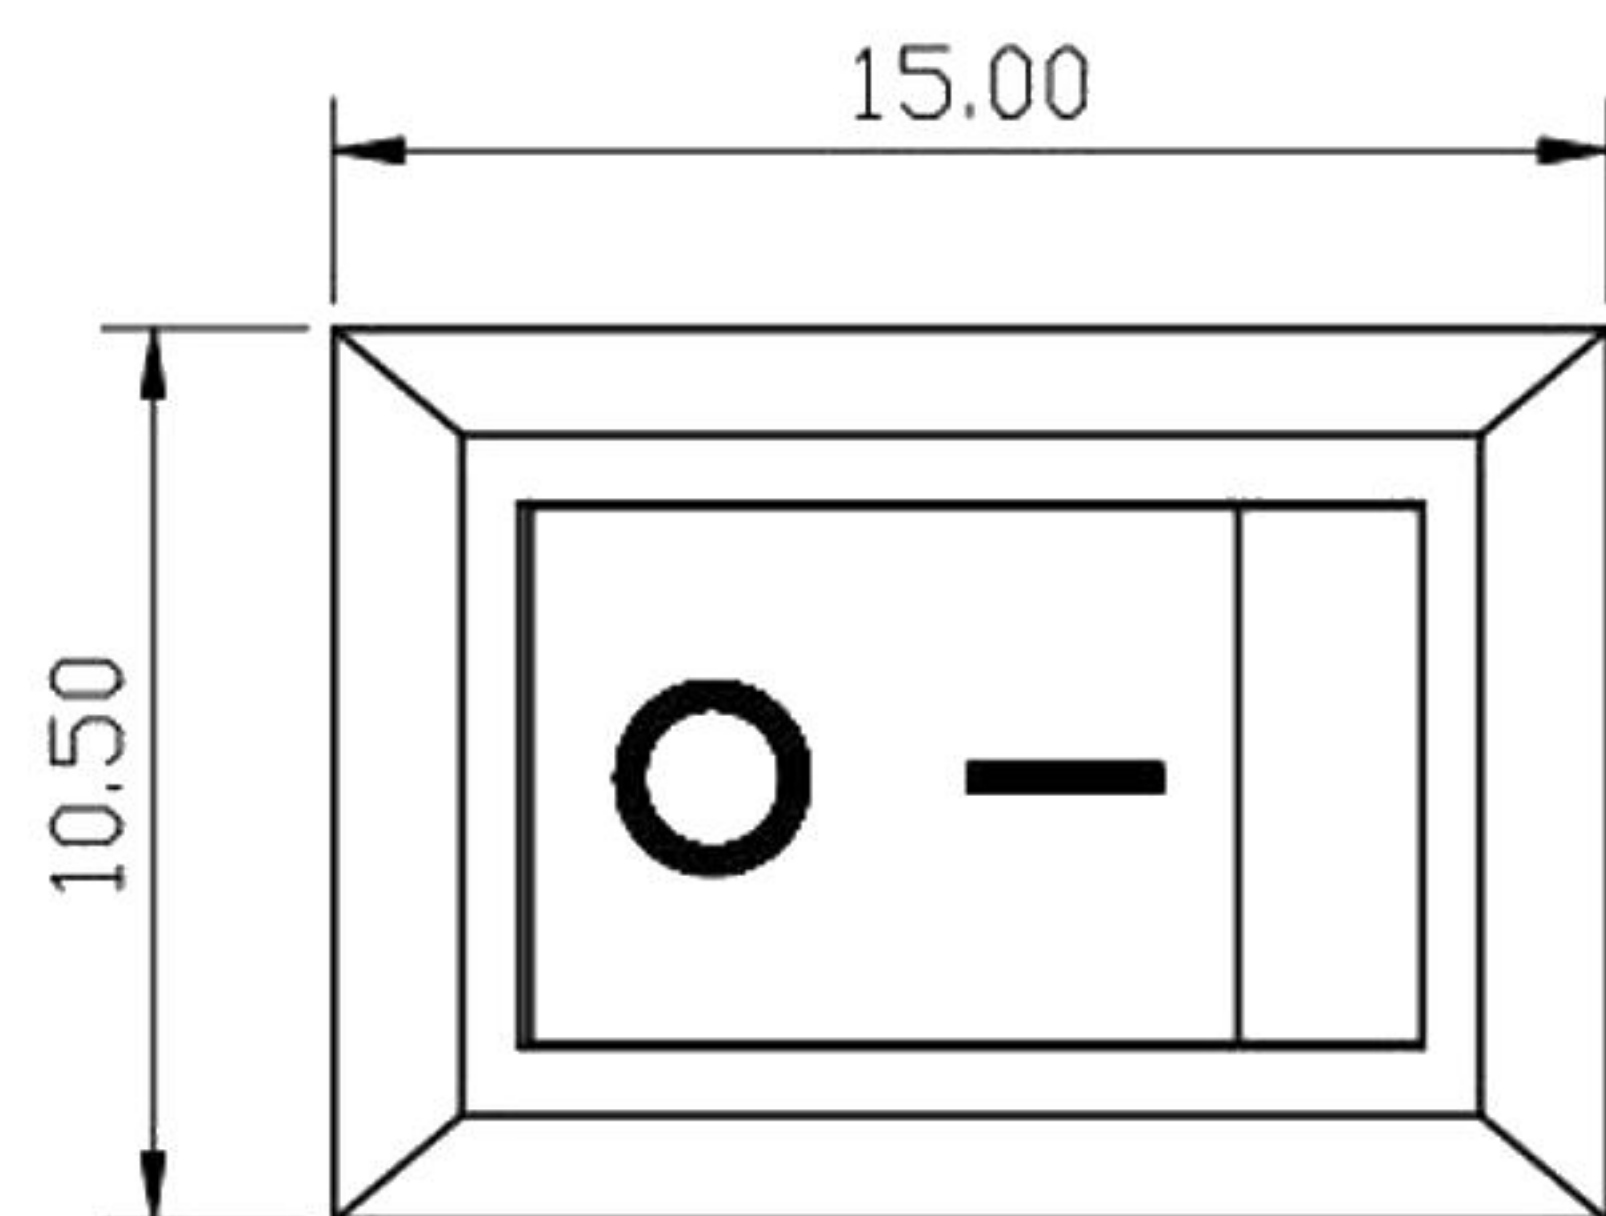
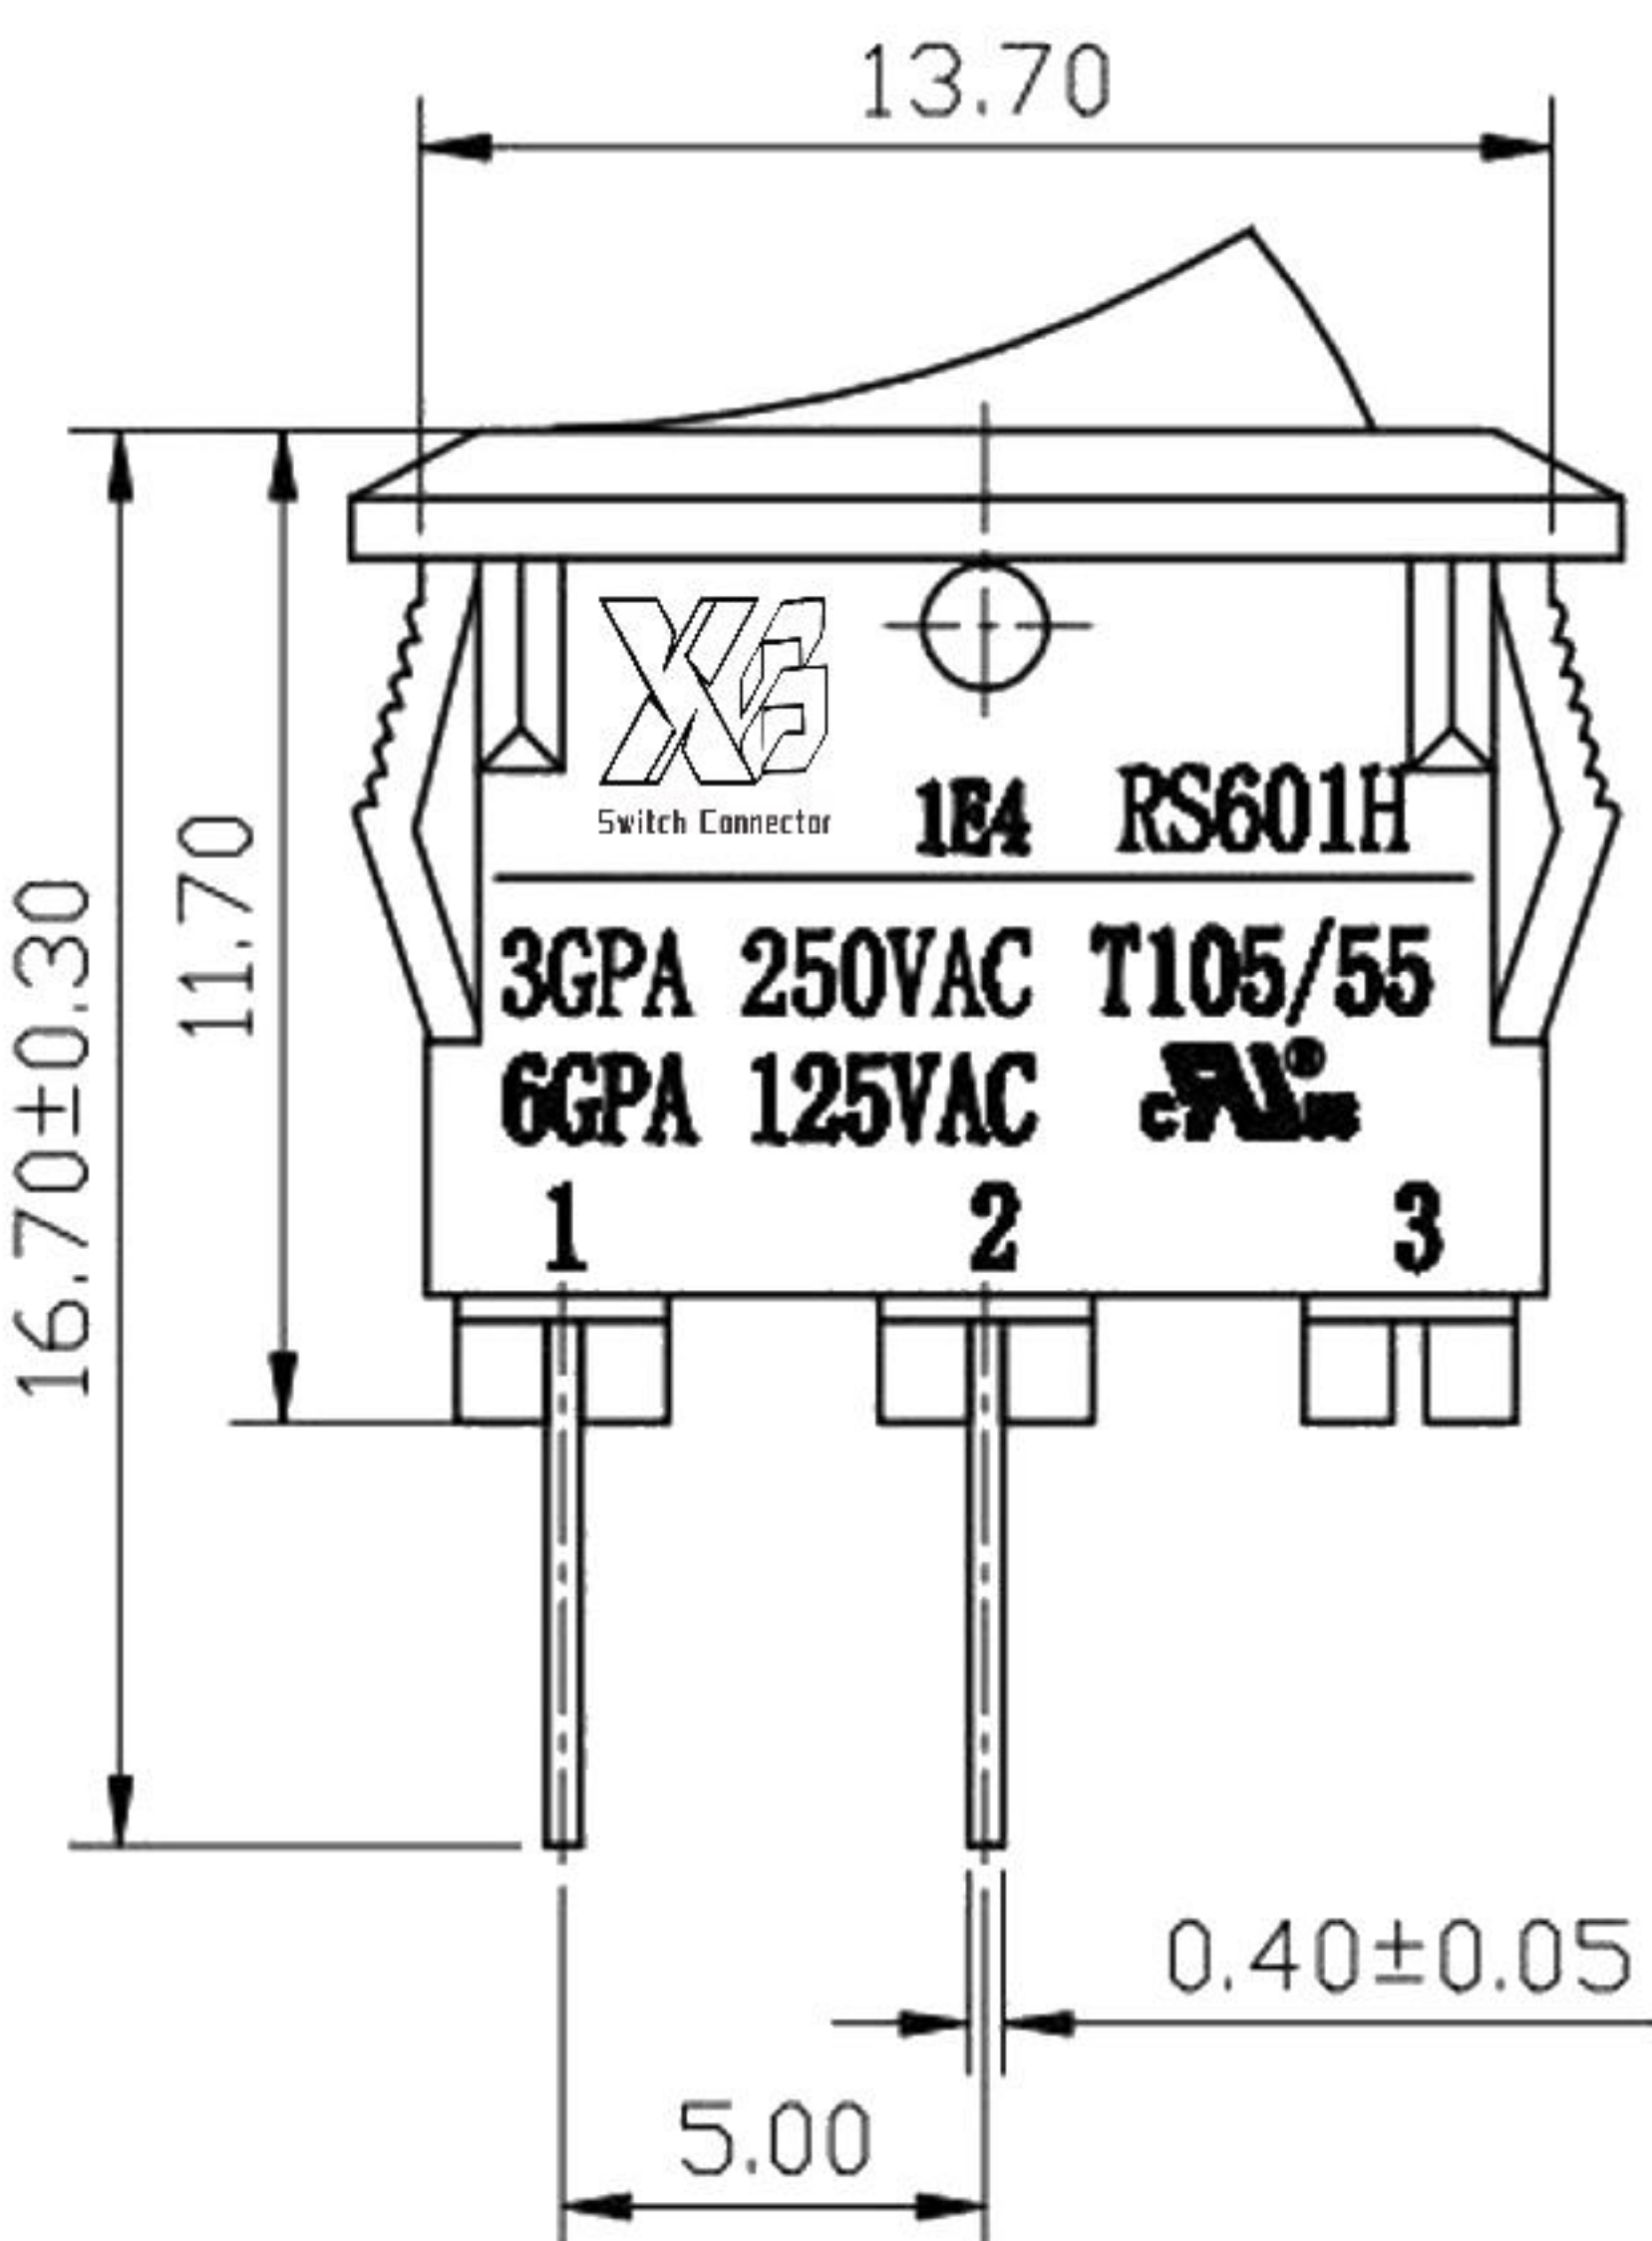


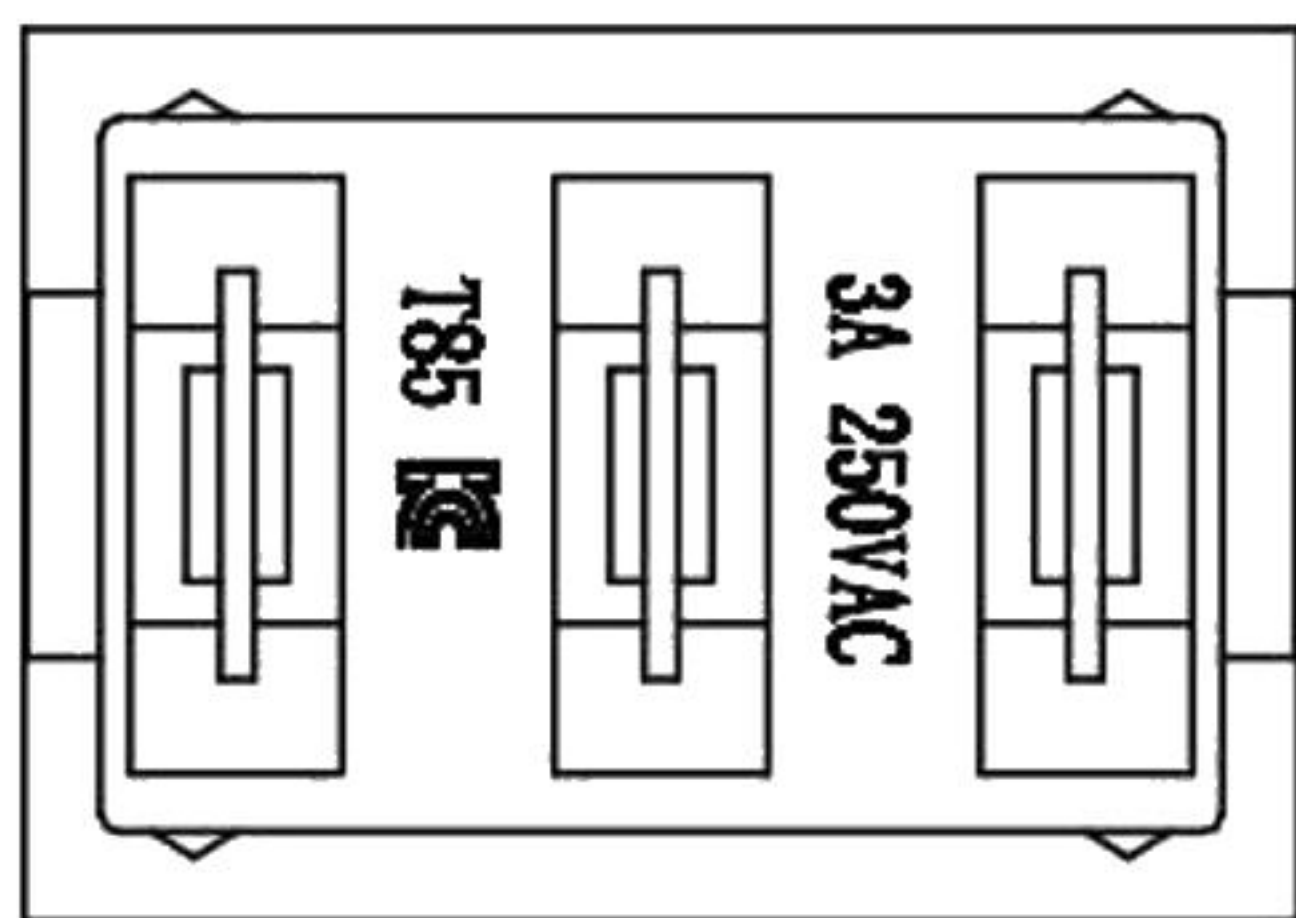

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	9.00~9.10	13.50~13.60
1.25~2.00	9.00~9.10	13.60~13.70

NOTES:

1. Rating:

VDE ENEC 3A 250VAC T125/55

UL cUL 6GPA 125VAC/3GPA 250VAC T105/55

CQC 3A 250VAC, 3A/40A 250VAC T105/55

KC 3A 250VAC T85

2. Circuit Diagram: 2P ON-OFF

3. Terminal Strength: ≥40N

4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min

Terminals to Button: 3000VAC 1min


Leakage Current: 1mA

6. Current resistance: ≤50mΩ (initial)

7. Insulation resistance: ≥100MΩ

8. Body Material: NYLON 66 94V-0~2

SWITCHING CIRCUIT

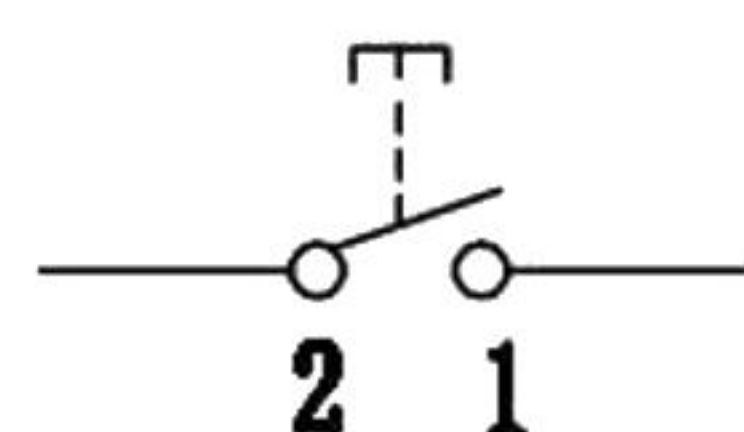

7	基座	1	环保阻燃PA66		
6	弯端部件	1	0.4mm黄铜带+铜触点	镀锡	
5	中端	1	0.4mm黄铜带	镀锡	
4	跳片部件	1	0.4mm黄铜带+复合银触点	镀银	
3	套管	1	0.3mm拉伸钢		
2	弹簧	1	ø0.3弹簧钢丝	发黑	
1	按钮	1	环保阻燃PA66		
序号	名称	数量	材料	处理	备注

47*34*25cm箱, 500只*20袋装=10K件, 净重: 16 KG, 毛重: 18.5=KG,

A4				普通公差:		Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	跷板开关	比 例	Free
A1				ABOVE 5 TO 30	±0.30	绘 图	千 方 毅	核 对	吴 飞	型 号	RS601HL-1010011BB-4A-ZP		
				ABOVE 30	±0.50	日 期		核 准		图 号			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	DATE	2021. 11. 04	APPROVAL BY	周 培 雷	DWG NO.	/RS601H		