
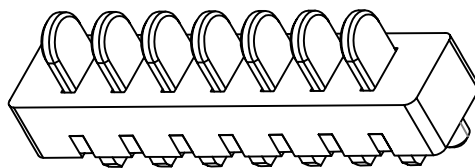




RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE

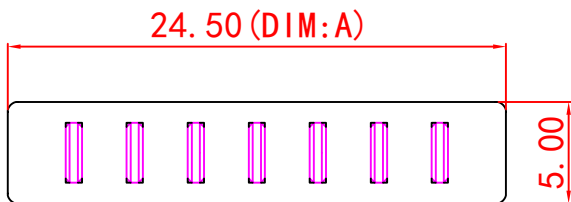


3D VIEW

规格尺寸: 型号	DIM:A	DIM:B	DIM:C
XB-D01M-A-2P-R1	9.50	7.50	3.00
XB-D01M-A-3P-R1	12.50	10.50	6.00
XB-D01M-A-4P-R1	15.50	13.50	9.00
XB-D01M-A-5P-R1	18.50	16.50	12.00
XB-D01M-A-6P-R1	21.50	19.50	15.00
XB-D01M-A-7P-R1	24.50	22.50	18.00
XB-D01M-A-8P-R1	27.50	25.50	21.00
XB-D01M-A-9P-R1	30.50	28.50	24.00
XB-D01M-A-10P-R1	33.50	31.50	27.00
XB-D01M-A-11P-R1	36.50	34.50	30.00
XB-D01M-A-12P-R1	39.50	37.50	33.00

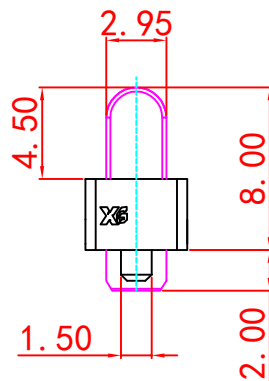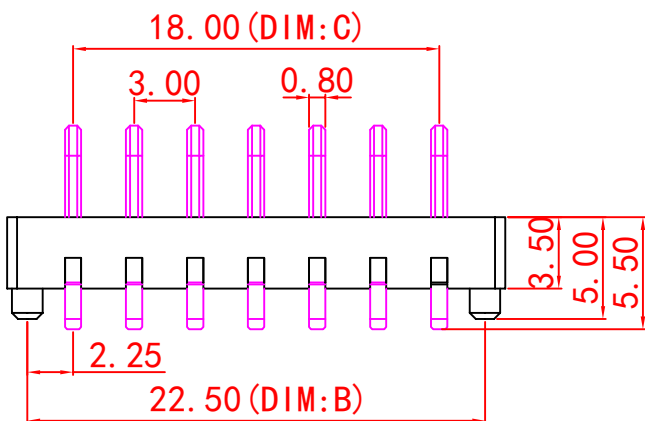

### SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
  - RATING: DC 12V 15A / Pin
  - CONTACT RESISTANCE: 30mΩ
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - INSULATION RESISTANCE: 500MΩ , MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.
- TEMPERATURE RISE : 30° C MAX

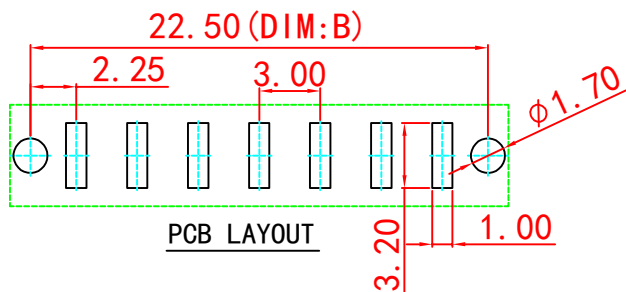

2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	HIGH CONDUCTIVITY COPPER	7	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

**XB** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	CONNECTOR		DRAWING	ZENQ. CHEN	DWG. No.	3.0公座
PART NO.	XB-D01M-A-R1系列		CHECK	JUN. YANG	REV.	A1
UNIT: mm	TOLERANCE	X.X ±0.15 X.X' ±1" X.XX ±0.10 X.XX' ±0.5" X.XXX ±0.05 X.XXX' ±0.05"	ANGLE	DONG. PANG	DATE	2023. 5. 8
	OTHERWISE	X.XXX ±0.005 X.XXX' ±0.005"	0° ±3"	SCALE	3:1	PAGE 1 OF 1