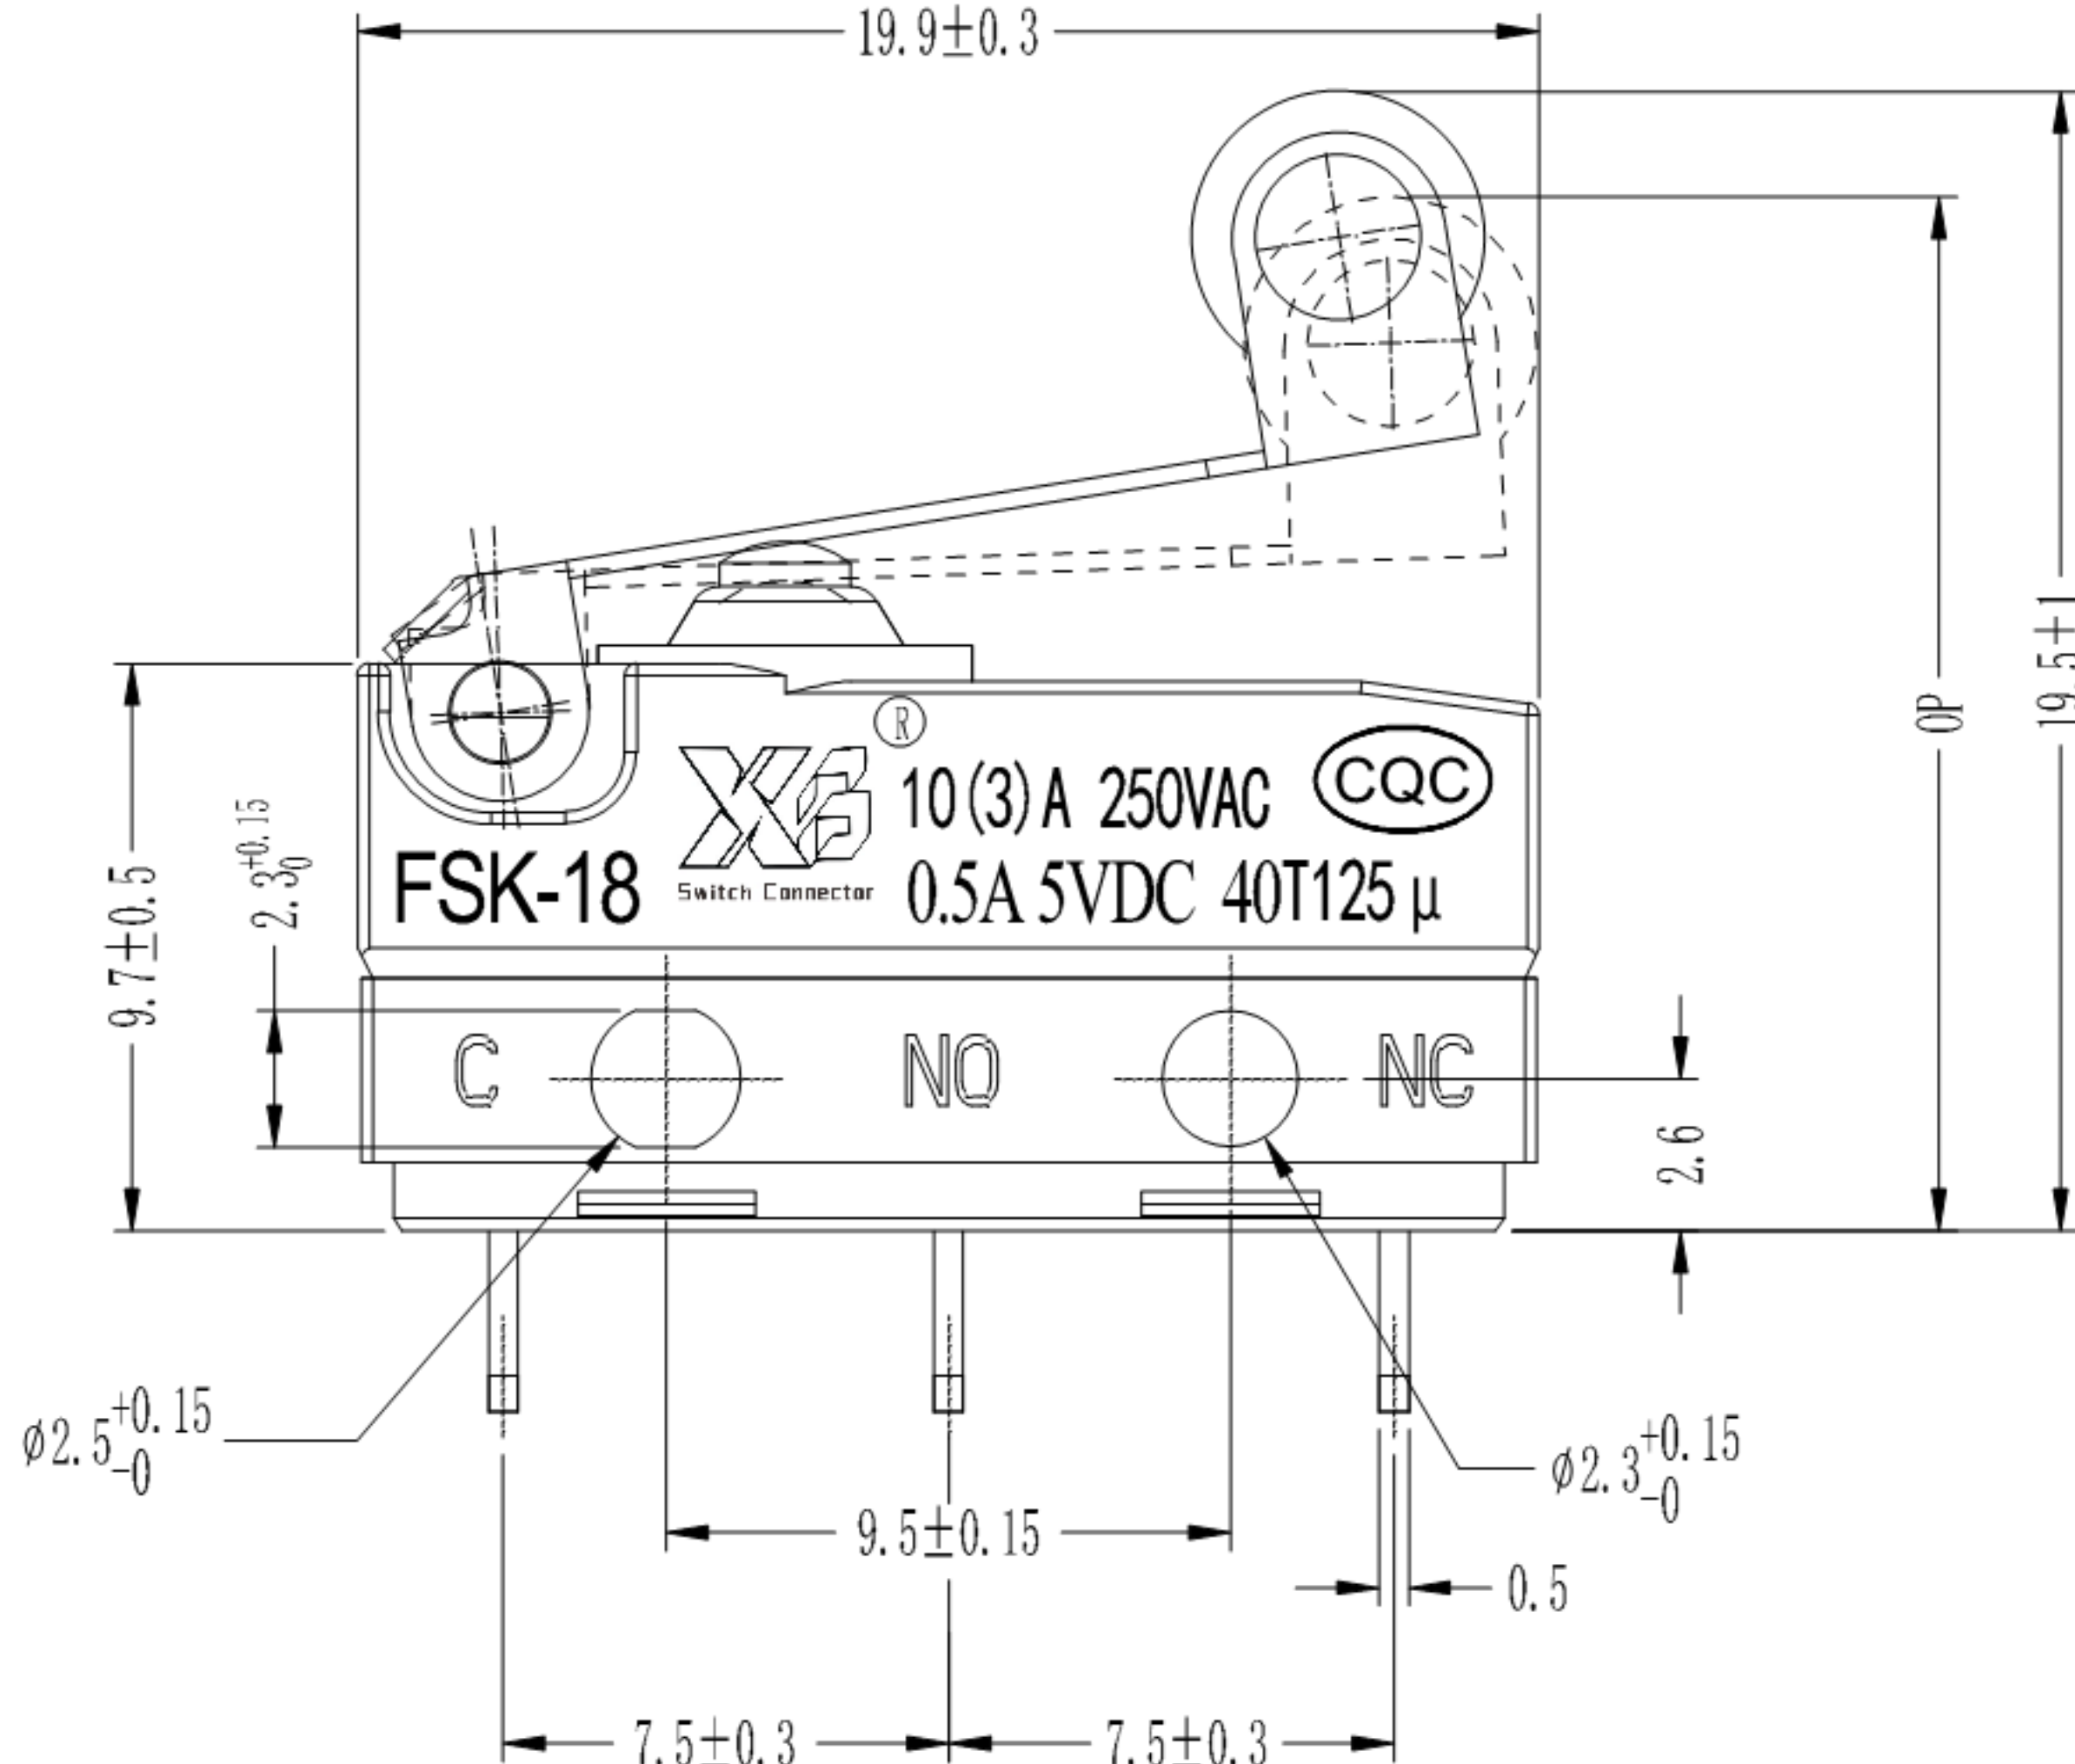
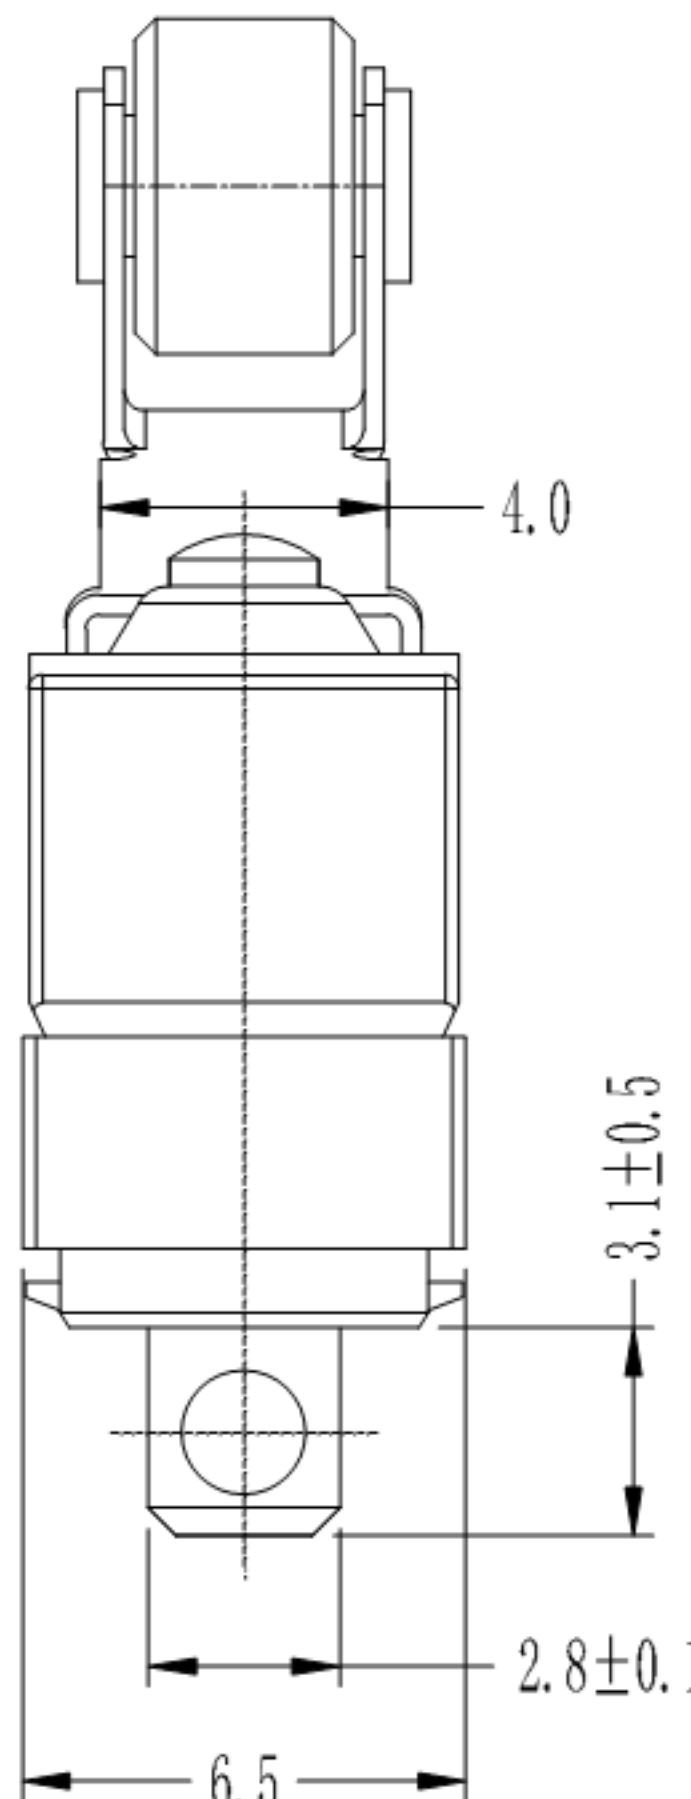
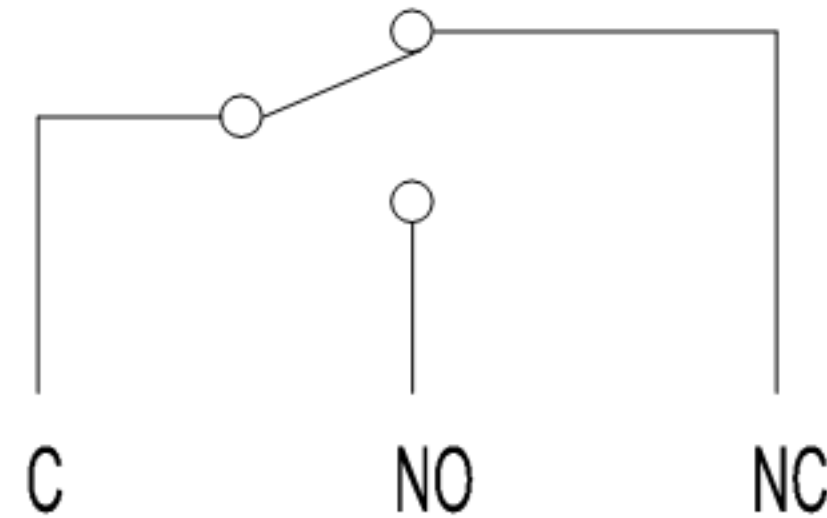
 CAD FILE:																																																																																																																																									
   SCHEMATIC																																																																																																																																									
2. 认证: CQC 10(3)A 250VAC 0.5A 5VDC 40T125μ  10.1(3)A 125/250V~ 6A 36VDC 40T125μ				1. 技术参数 (Technical Parameters) <table><tr><td>序号</td><td colspan="9">主要技术参数(Main Technical Parameters)</td></tr><tr><td>1</td><td colspan="9">电气额定值(Electrical Rating): 10(3)A 250VAC 0.5A 5VDC</td></tr><tr><td>2</td><td colspan="9">电气寿命(Electrical lifetime): 1E4 cycles</td></tr><tr><td>3</td><td colspan="9">接触电阻(Contact Resistance): ≤50mΩ</td></tr><tr><td>4</td><td colspan="9">操作力(Operating force): 1.0±0.6N</td></tr><tr><td>5</td><td colspan="9">动作位置(OP): 17.7±1mm</td></tr><tr><td>6</td><td colspan="9">耐压(Withstand Voltage): 脚与脚 500V/5S/5mA;脚与壳 1500/5S/5mA</td></tr><tr><td>7</td><td colspan="9">绝缘电阻(Insulation Resistance): ≥100MΩ (Test Voltage 500VDC)</td></tr><tr><td>8</td><td colspan="9">漏电起痕指数Proof Tracking Index (PTI): 175V</td></tr><tr><td>9</td><td colspan="9">环境温度(Ambient temperature): 125°</td></tr><tr><td>10</td><td colspan="9">防护等级: IP67</td></tr><tr><td></td><td colspan="9"></td></tr><tr><td></td><td colspan="9"></td></tr></table>				序号	主要技术参数(Main Technical Parameters)									1	电气额定值(Electrical Rating): 10(3)A 250VAC 0.5A 5VDC									2	电气寿命(Electrical lifetime): 1E4 cycles									3	接触电阻(Contact Resistance): ≤50mΩ									4	操作力(Operating force): 1.0±0.6N									5	动作位置(OP): 17.7±1mm									6	耐压(Withstand Voltage): 脚与脚 500V/5S/5mA;脚与壳 1500/5S/5mA									7	绝缘电阻(Insulation Resistance): ≥100MΩ (Test Voltage 500VDC)									8	漏电起痕指数Proof Tracking Index (PTI): 175V									9	环境温度(Ambient temperature): 125°									10	防护等级: IP67																												
序号	主要技术参数(Main Technical Parameters)																																																																																																																																								
1	电气额定值(Electrical Rating): 10(3)A 250VAC 0.5A 5VDC																																																																																																																																								
2	电气寿命(Electrical lifetime): 1E4 cycles																																																																																																																																								
3	接触电阻(Contact Resistance): ≤50mΩ																																																																																																																																								
4	操作力(Operating force): 1.0±0.6N																																																																																																																																								
5	动作位置(OP): 17.7±1mm																																																																																																																																								
6	耐压(Withstand Voltage): 脚与脚 500V/5S/5mA;脚与壳 1500/5S/5mA																																																																																																																																								
7	绝缘电阻(Insulation Resistance): ≥100MΩ (Test Voltage 500VDC)																																																																																																																																								
8	漏电起痕指数Proof Tracking Index (PTI): 175V																																																																																																																																								
9	环境温度(Ambient temperature): 125°																																																																																																																																								
10	防护等级: IP67																																																																																																																																								
8					TOLERANCE UNLESS SPECIFIED																																																																																																																																				
7																																																																																																																																									
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版		ZENQ. CHEN																																																																																																																															
5						ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.																																																																																																																															
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch			UNIT : mm	DRWG NO.: XB-FSK-18-011																																																																																																																																
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN.	JUN. YANG																																																																																																																															
2	COVER	STEEL STRIP	1	Ni PLATED						2012-9-25																																																																																																																															
1	KNOB	PPA	1	BLACK						2012-9-25																																																																																																																															
NO.	PARTS	MATERIALS	Q'TY	FINISH	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25																																																																																																																															
								APPD.	ZENQ. CHEN	2012-9-25																																																																																																																															