



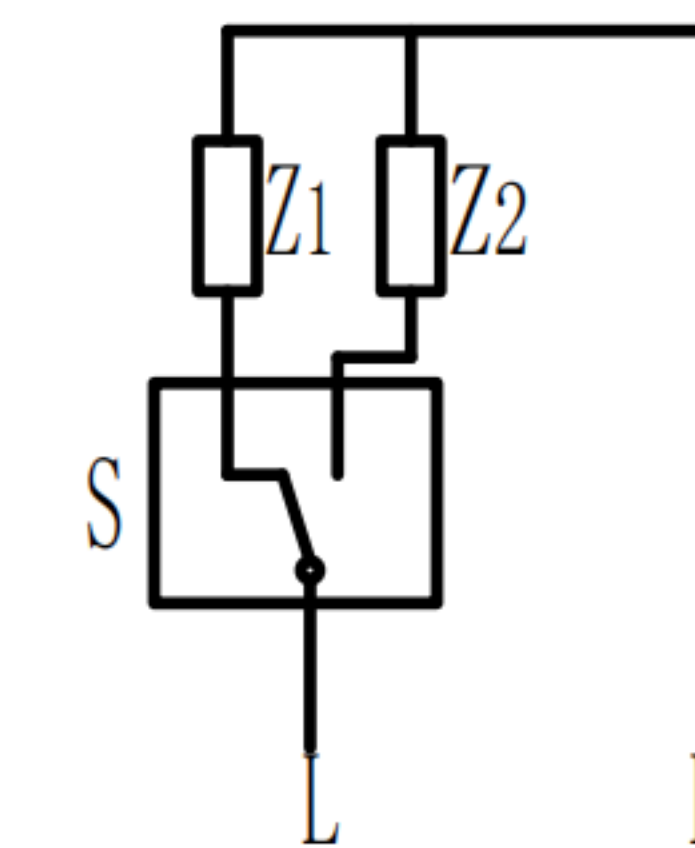

SCHEMATIC

2. 认证:

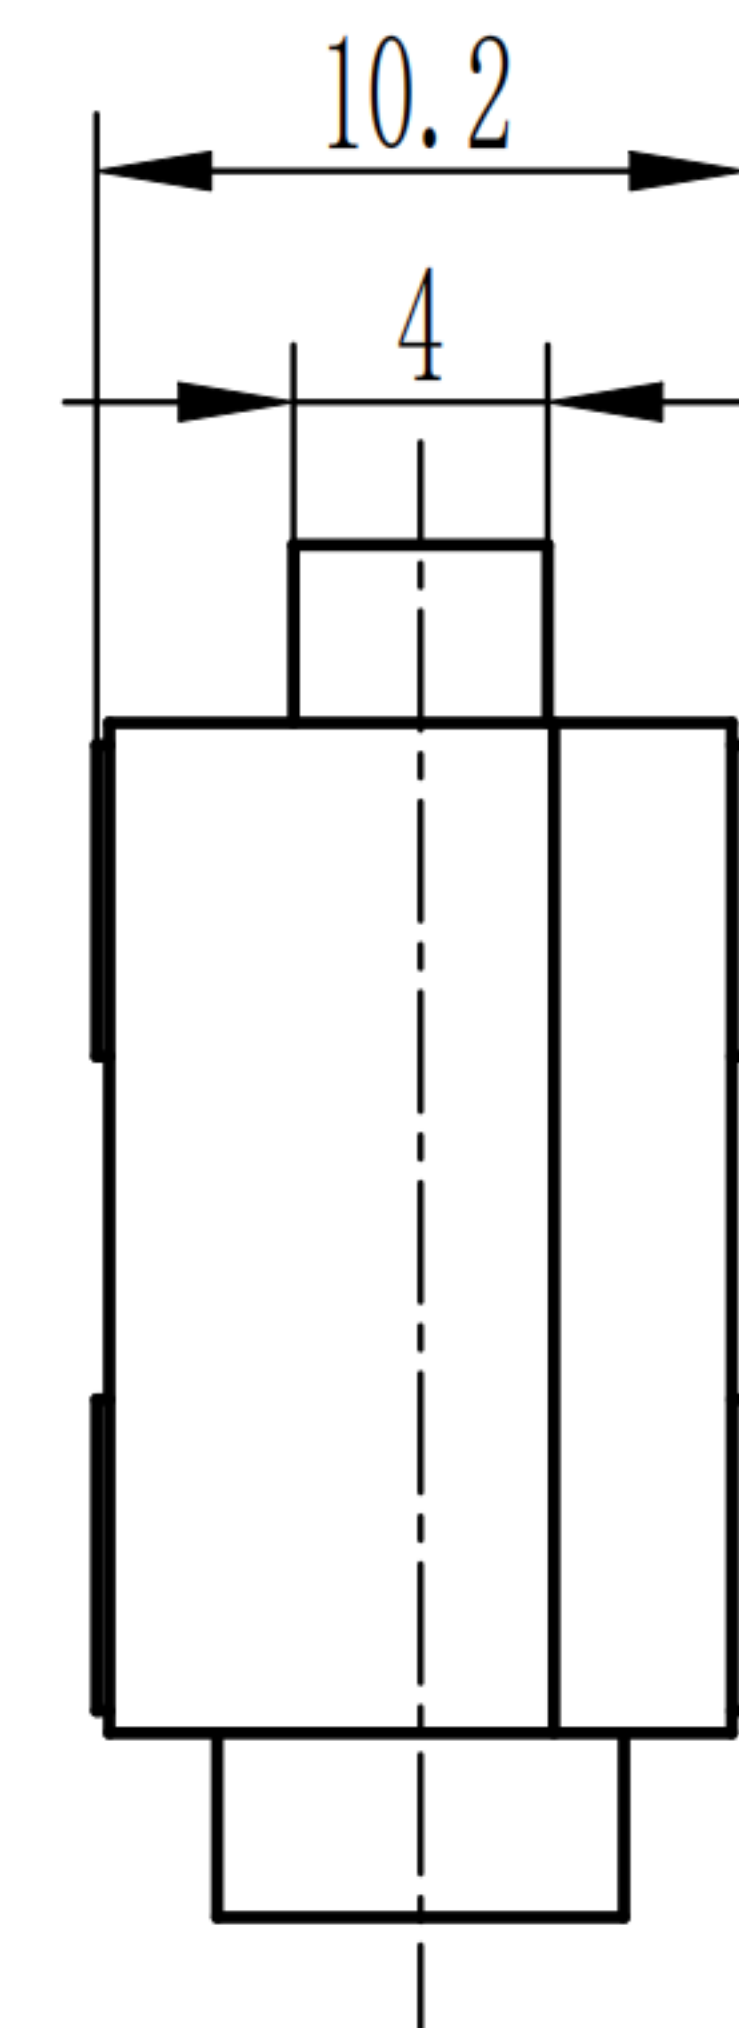

16(3) A 250VAC T105 μ


16(3) A 250V[~] μ 5E4 T125

16(3)A 250V[~] μ 50E3 T125

● 15A 125V[~] T105

16(4)A 250V[~] μ T125

端子尺寸:

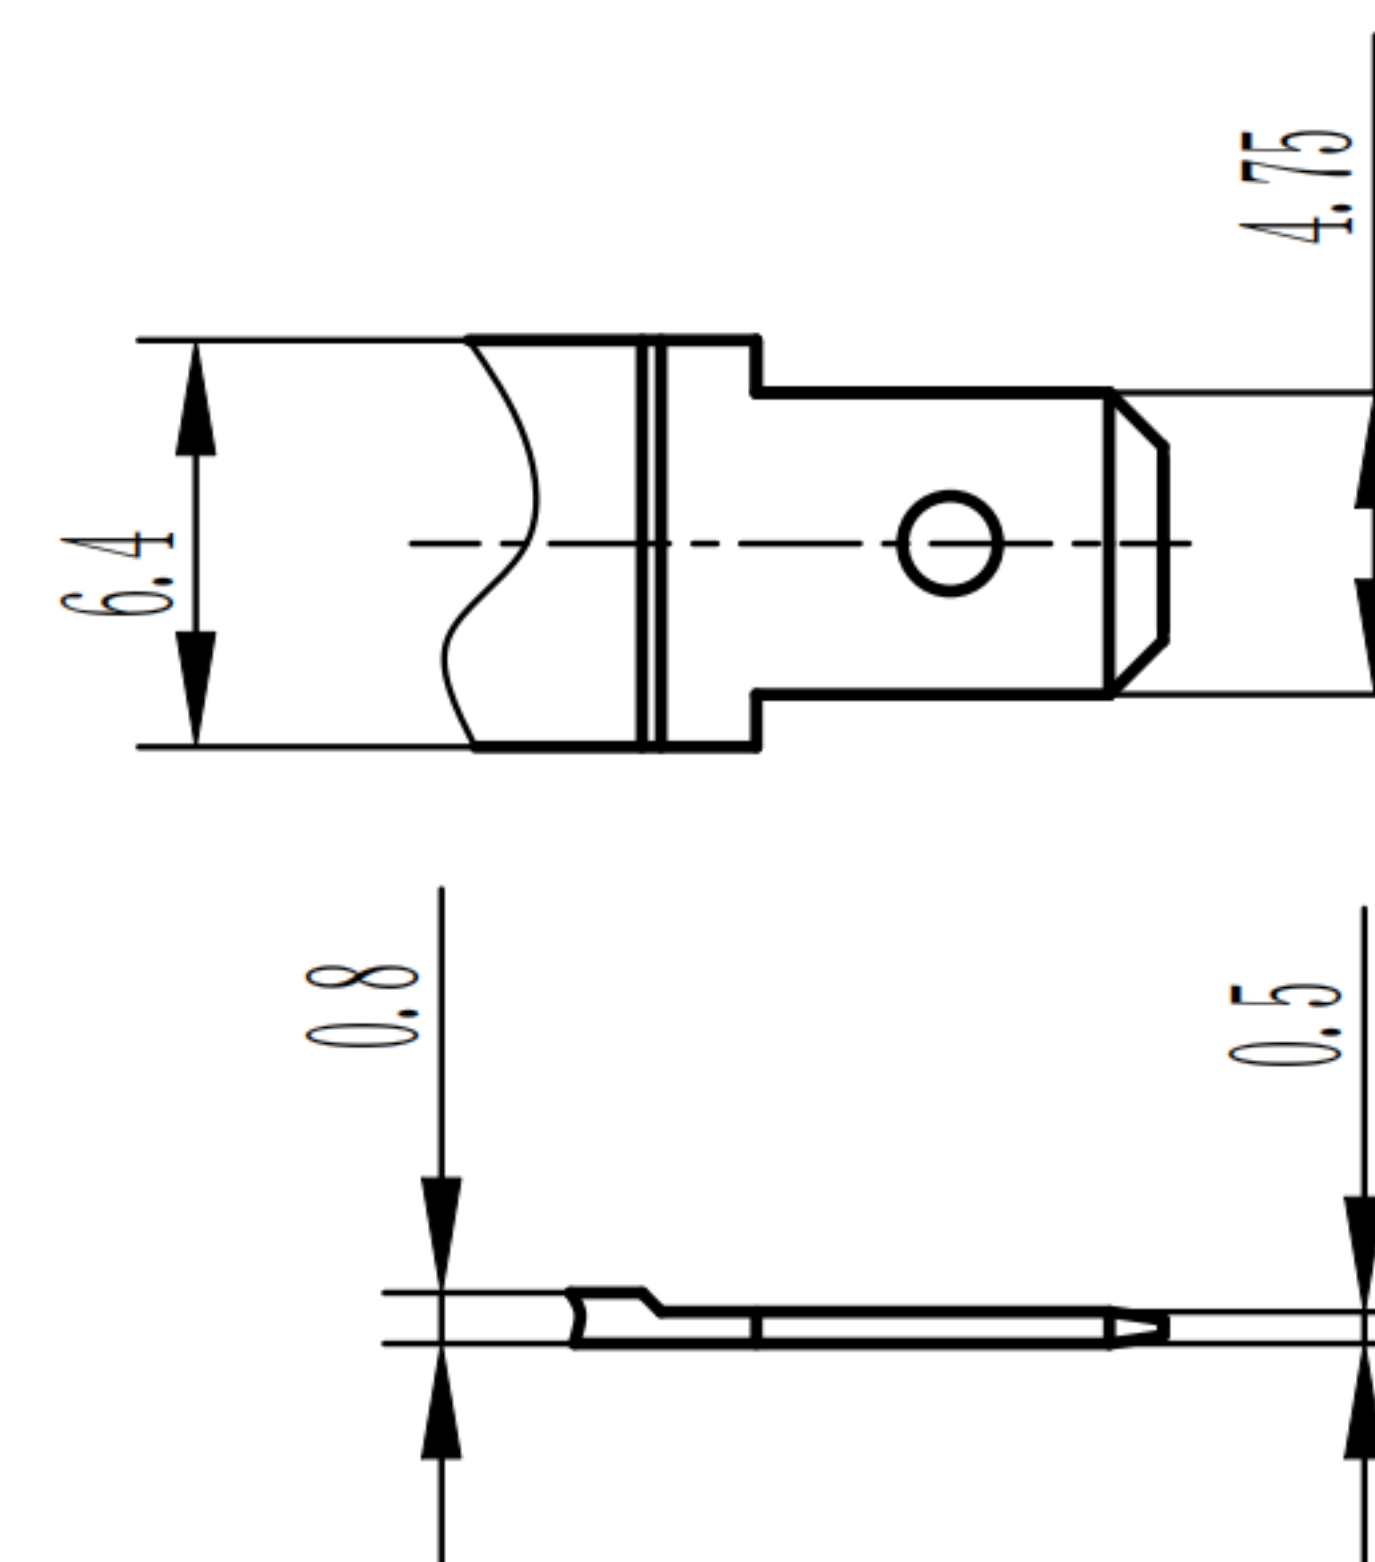

1. 技术参数 (Technical Parameters)

序号	主要技术参数(Main Technical Parameters)
1	电气额定值(Electrical Rating): 16A 250VAC
2	环境温度(Ambient temperature): T125°
3	动作力(OF): 1.3N-1.9N
4	动作行程(PT): $1.0 \pm 0.5\text{mm}$
5	差动行程(MD): $\leq 0.4\text{mm}$
6	接触电阻(Contact Resistance): $\leq 50\text{m}\Omega$ (不带线)
7	绝缘电阻(Insulation Resistance): $\geq 100\text{M}\Omega$ (Test Voltage 500VDC)
8	耐压(Withstand Voltage): 端一端500VAC-60S, 漏电流5mA
	外壳与端子之间1500VAC/60S, 漏电流5mA。开关应无击穿现象。
9	电气寿命(Electrical lifetime): 5E4
10	漏电起痕指数Proof Tracking Index (PTI): 175V
11	

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch			UNIT : mm	DRWG NO.XB-HK-14-1X-16AP-1117	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD.	ZENQ. CHEN	2012-9-25