

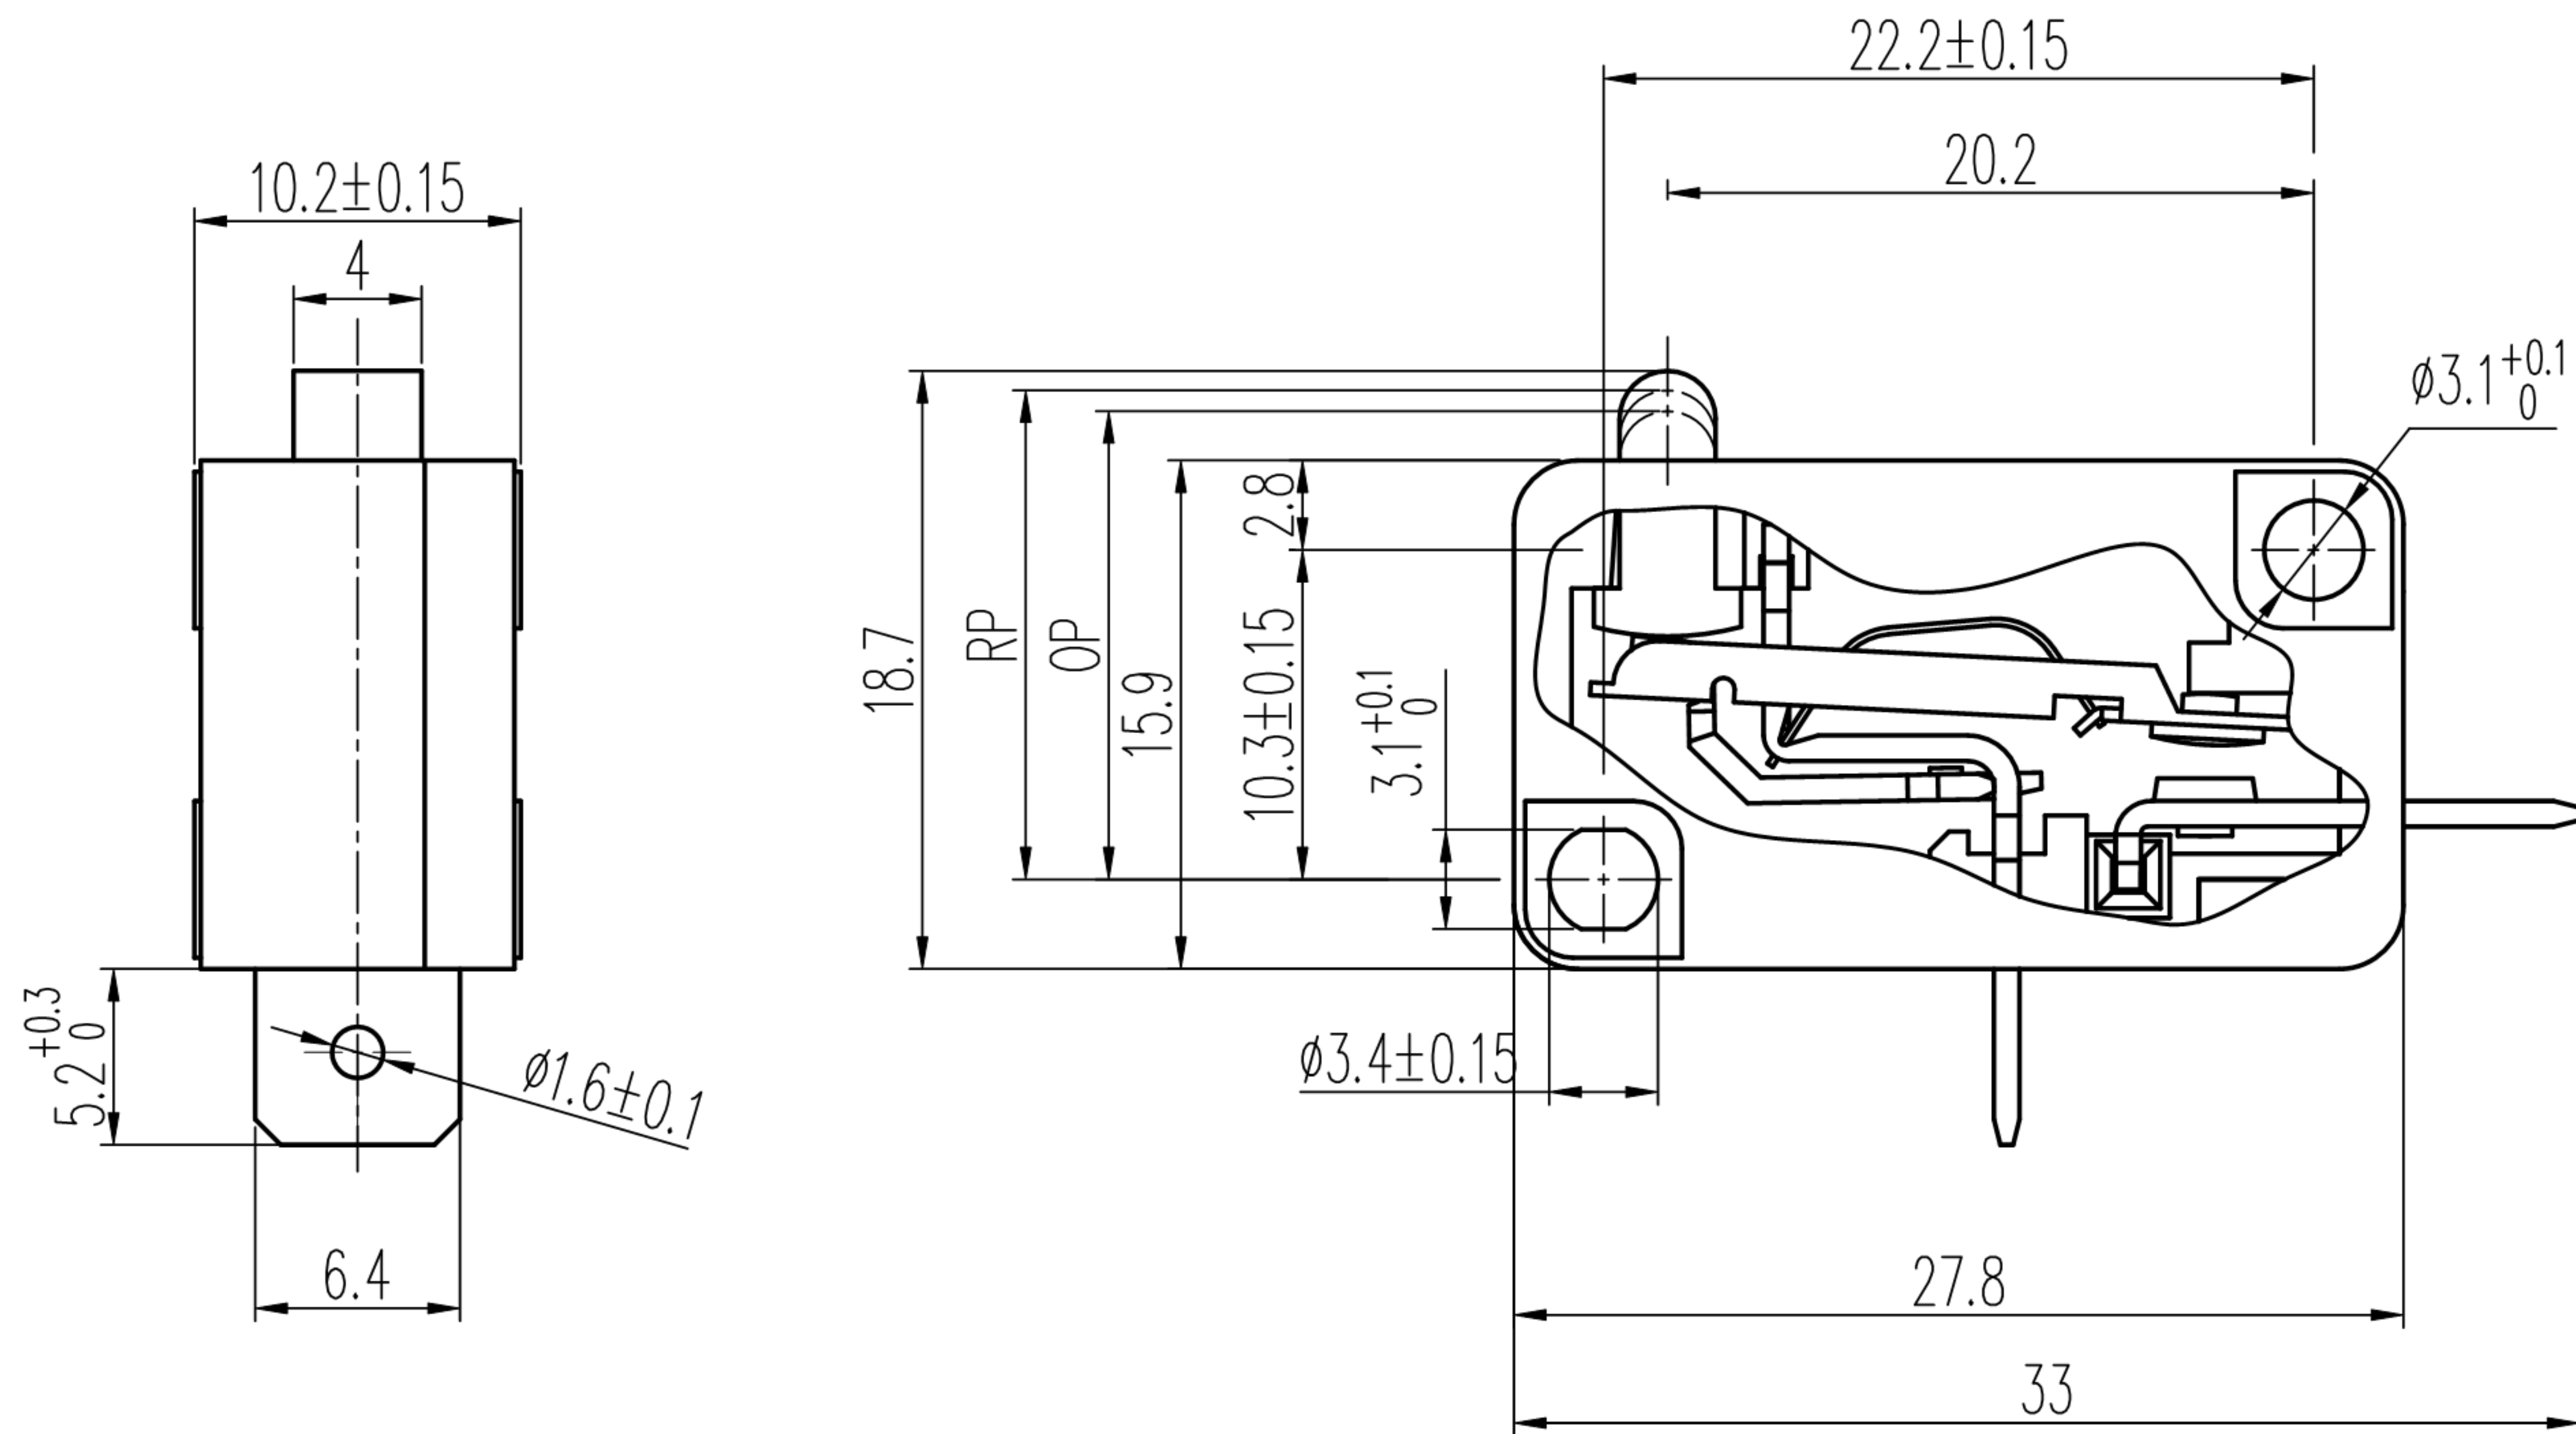


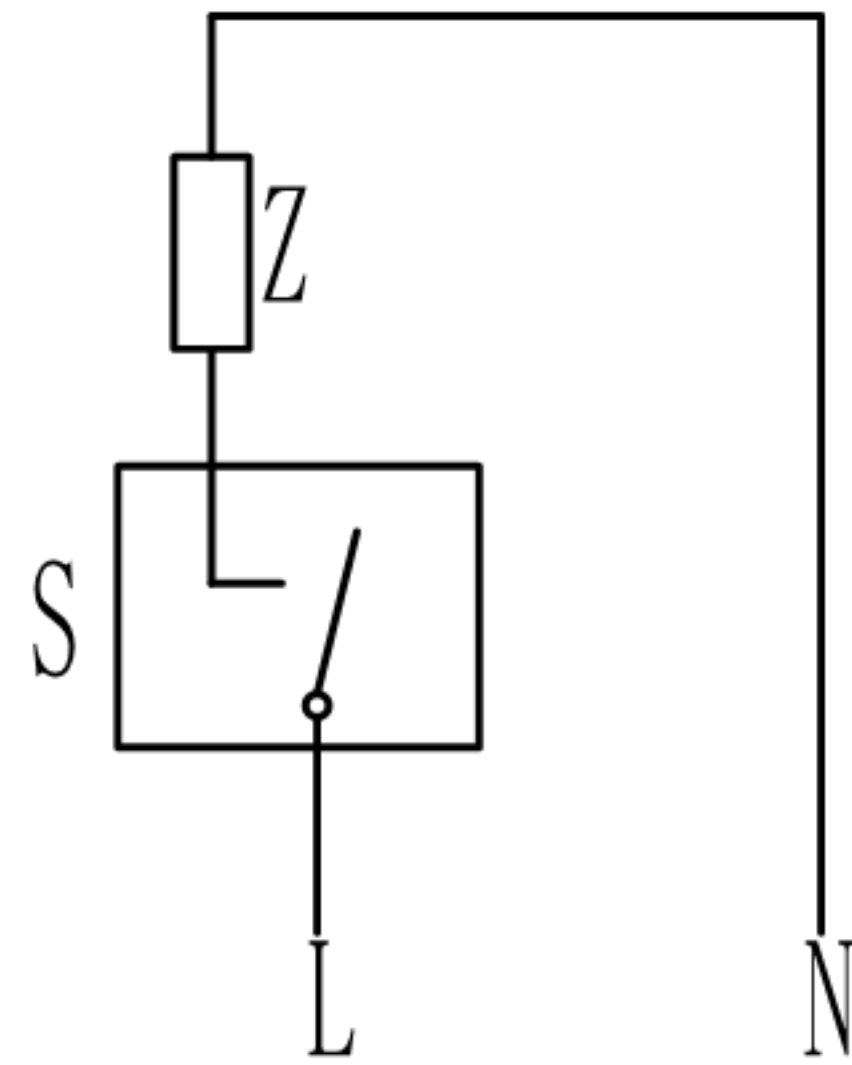

端子尺寸:

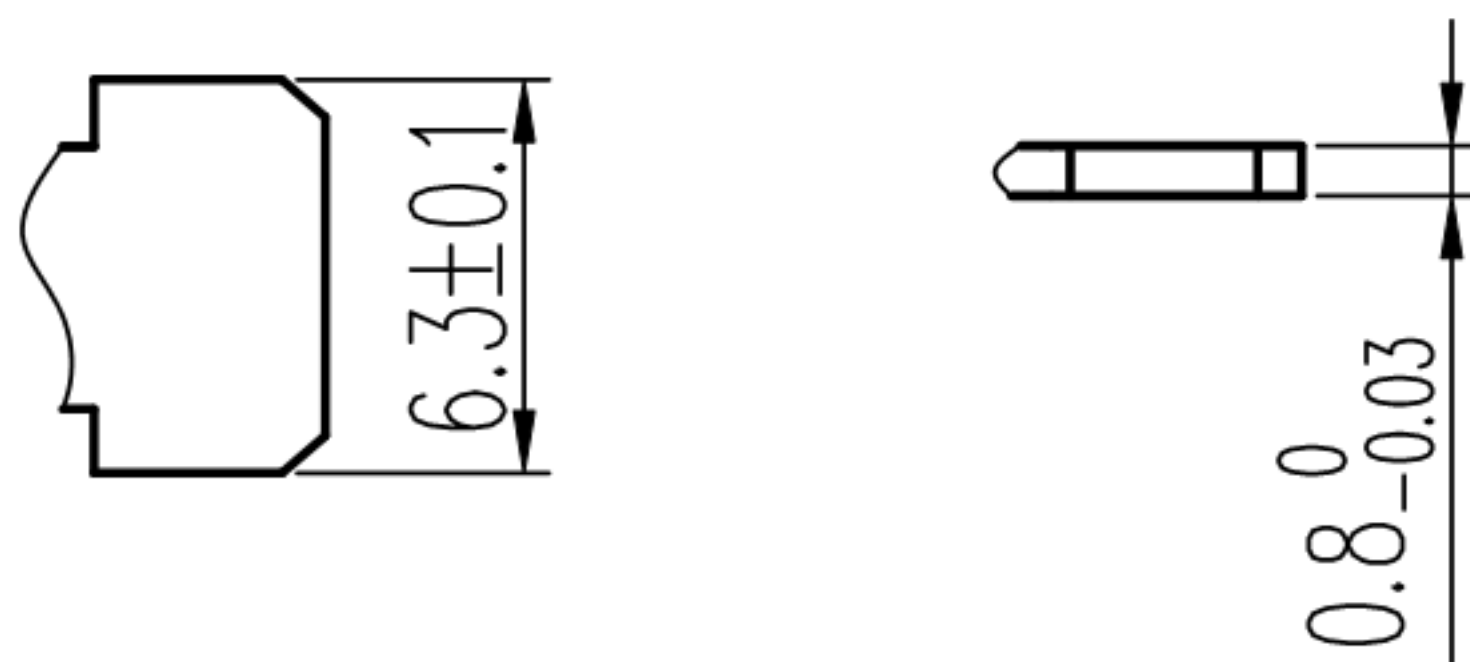

SCHEMATIC

2. 认证:



1. 技术参数

序号	技术参数值(Technical Parameters)
1	电气额定值(Electrical Rating): 16A 250VAC
2	温度等级(temperature grade): T125
3	动作力(OF): 0.8~1.2N
4	动作位置(OP): 14.8~15.2mm
5	回复位置(RP): ≤ 15.2 mm
6	接触电阻(Contact Resistance): ≤ 50 m Ω (初始值)
7	绝缘电阻(Insulation Resistance): ≥ 100 M Ω (试验电压500VDC)
8	耐压(Withstand Voltage): 端一端750VAC/5S, 漏电流5mA; 外壳与端子之间1500VAC/5S, 漏电流5mA。开关应无击穿现象。
9	电气寿命(Electrical Service Life): 5E4
10	耐漏电起痕(Proof Tracking Index): 175V
11	其它(Other):

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch			UNIT : mm	DRWG NO. XB-HK-14-1X-16AP-1117
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.