




CAD FILE:

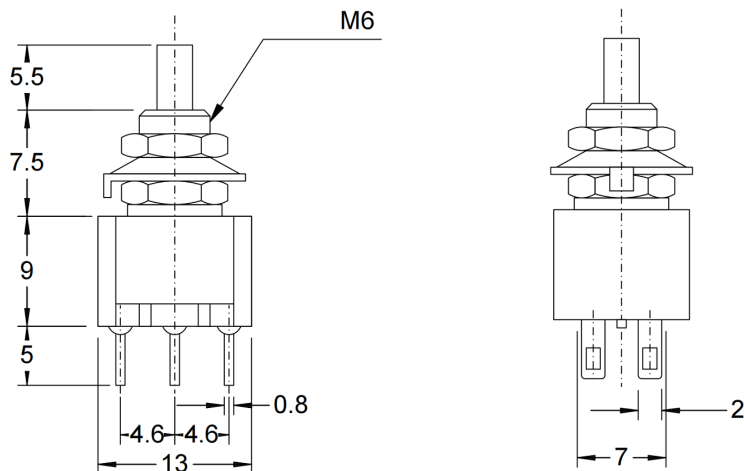

SCHEMATIC

CIRCUIT : ON-ON(2P2T)

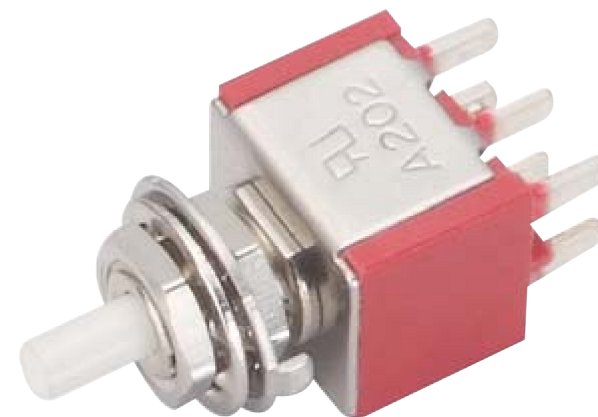

注：“*”表示关键尺寸(4个).

SPECIFICATIONS

CONTACT RATING	: 5A with resistive load @ 120 VAC or 28 VDC.
ELECTRICAL LIFE	: 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE	: 10mΩ max. initial @ 2.4 VDC. 100mA for both coin silver and gold plated contacts.
INSULATION RESISTANCE	: 1,000MΩ min.
DIELECTRIC STRENGTH	: 1,000V RMS @ sea level.
OPERATING TEMPERATURE	: -30°C to 130°C.

				TOLERANCE					
				UNLESS SPECIFIED					
8									
7									
6				WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版		ZENQ. CHEN
5				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Button switch			UNIT : mm	DRWG NO.: XB-PB-102
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEFI :			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED				APPD. ZENQ. CHEN 2012-9-25	
1	KNOB	PPA	1	BLACK				APPD. ZENQ. CHEN 2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD.	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

CHK'D DONG. PANG 2012-9-25
APPD. ZENQ. CHEN 2012-9-25